

## ENVIROMAX EXTERNAL DIESEL BOILER

MANUFACTURED BY:



- High efficient, fully modulating condensing boiler.
- High quality weather-proof PVC-coated casing, insulated to prevent heat loss.
- Patented heat exchanger design.
- Removable side panels for easy access.
- Multiple flow and return connection points for ease of installation.
- Fitted with frost protection thermostat.
- Stainless steel terminal guard.
- High performance Riello RDB burner.
- Runs on standard diesel fuel.
- Pre-arranged for open vented installation.

**2 YEAR\*  
WARRANTY**



### CONFIGURATIONS

Enviromax External 26kW Diesel Boiler  
Enviromax External 35kW Diesel Boiler  
Enviromax External 44kW Diesel Boiler  
Enviromax External 58kW Diesel Boiler  
Enviromax External 73kW Diesel Boiler



### FUEL KIT



### OPTIONAL EXPANSION TANK & PUMP



### SHOWROOM

11 Fiveways Boulevard  
Keysborough  
VIC 3173

PHONE 1300 00 1800


FAX (+613) 9798 5133

[enquiries@huntheat.com.au](mailto:enquiries@huntheat.com.au)


[www.huntheat.com.au](http://www.huntheat.com.au)

Model	Weight	Dimensions (mm)										
		H	W	D	A	C	E	F	G	I	J	K
26kW	154	945	720	625	795	180	540	175	70	351	133	432
35kW	158	945	720	625	795	180	540	175	70	351	133	432
44kW	244	1074	839	855	936	180	684	175	115	507	134	505
58kW	250	1074	839	855	936	180	684	175	115	507	134	505
73kW	280	1200	903	855	1039	180	684	175	115	507	134	555


Front View

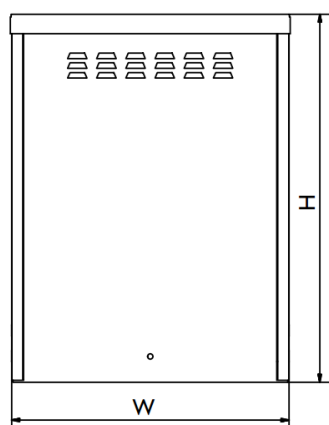

Side View

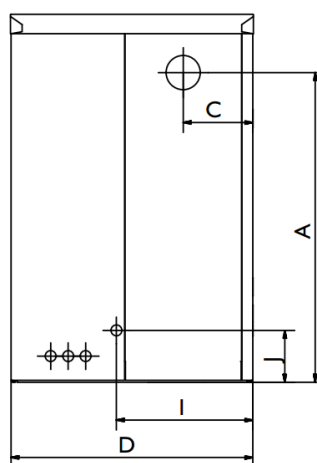

Rear View

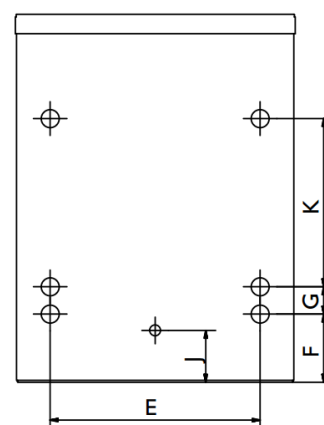

Model	26 kW	35 kW	44 kW	58 kW	73 kW
Modulation Range	20-26 kW	26-35 kW	35-44 kW	44-58 kW	58-73 kW
Efficiency	93%	92%	94%	93%	93%
Heating Flow	1" BSP	1" BSP	1 1/2" BSP	1 1/2" BSP	1 1/2" BSP
Heating Return	1" BSP	1" BSP	1 1/2" BSP	1 1/2" BSP	1 1/2" BSP
Drain Off Valve	1/2" BSP	1/2" BSP	1/2" BSP	1/2" BSP	1/2" BSP
Condensate Pipe	22 mm dia. plastic				
Boiler Water Content	24 litres	24 litres	43.5 litres	43.5 litres	54 litres
Preset Pressure Relief Valve	3 bar				
Fuel Type	Diesel				
Electrical Supply	230V AC 50Hz 5A				
Boiler Thermostat Control	60°C - 80°C				
Boiler Safety Limit	110°C				
Room Thermostat Connection	230v AC 50Hz				
Frost Thermostat	✓				
System Type	Supplied ready for open vented installation				
	Sealed system optional -pump and expansion tank required				