DUO HYDRO AIR PELLET BOILER

MANUFACTURED BY:



The DUO pellet boiler comes with HYDRO AIR technology which allows the pellet boiler to heat both the room in which it is installed, via forced ventilation, as well as the water for the hydronic system.

The MCZ Biomass range is an excellent low carbon and hydronic hot water solution.

Biomass in general offers a cost effective, off grid solution versus electric and LPG.







102 White, 105 Bordeaux, 107 Black MEASUREMENTS

1223mm (H) x 582mm (W) x 622mm (D)

ACCESSORIES

WOOD PELLETS 15 - 1 X 15kg Bag of wood pellets (Provided free of charge with purchase of pellet boiler for commissioning).






SHOWROOM 11 Fiveways Boulevard Keysborough VIC 3173 PHONE 1300 00 1800 FAX (+613) 9798 5133


enquiries@huntheat.com.au







POWER max	Maximum Power	tot 22.3 - 1.178 (kW-kcal/h) water 18 - 15.480 (kW - kcal/h)
POWER min	Minimum Power	tot 4.4 - 3.784 (kW-kcal/h) water 3 - 2.580 (kcal/h)
(%)	Nominal efficiency	92.5 (%)
	Pellet tank capacity	Approx. 32 kg
	Pellet diameter	6-8 mm
	Pellets burned	~0.9 / ~4.9 (kg/h)
	Running time with one load	~28 / ~5 (h)
I Ø	Flue diameter	80 mm
∑ Kg	Weight	195 kg
↑	Flue length	min. 4.5 - max. 12.6







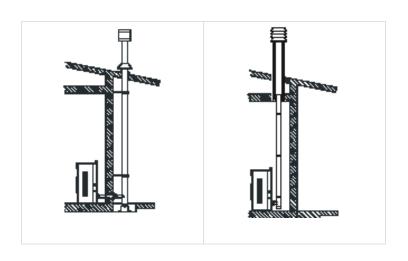





130 mm twin wall insulated stainless steel flue recommended and in stock at Hunt Heating.