

ENVIROMAX EXTERNAL SEALED DIESEL BOILER

MANUFACTURED BY:



- High efficient, fully modulating condensing boiler.
- Weather-proof PVC-coated casing, fully insulated to prevent heat loss.
- Low pressure switch protects boiler in the event of system water loss.
- Patented heat exchanger design.
- Fitted with frost protection stat.
- Stainless steel terminal guard.
- Flue can exit left or right.
- High performance MHG burner.
- Runs on standard diesel fuel.



**5 YEAR*
WARRANTY**



BLUE FLAME TECHNOLOGY

Whilst highly innovative, the principle is simple. Diesel Fuel is atomised at high pressure before being mixed with pre-warmed air and ignited. Hot combustion gases are then re-circulated through the burner blast tube via a specially designed slot. The result is a BLUE FLAME that produces perfect soot free combustion which reduces the consumption of diesel and emits the lowest possible NOx emissions. Easy to operate with a user friendly digital control panel and built in fault diagnostics.

FUEL KIT



OPTIONAL: MAGNA CLEAN



SHOWROOM

11 Fiveways Boulevard
Keysborough
VIC 3173

PHONE 1300 00 1800


FAX (+613) 9798 5133

enquiries@huntheat.com.au

www.huntheat.com.au

ENVIROMAX EXTERNAL SEALED DIESEL BOILER Outputs & Dimensions

Model	Weight	Dimensions (mm)										
		H	W	D	A	C	E	F	G	I	J	K
26kW	163	945	720	625	795	180	540	175	70	351	133	432

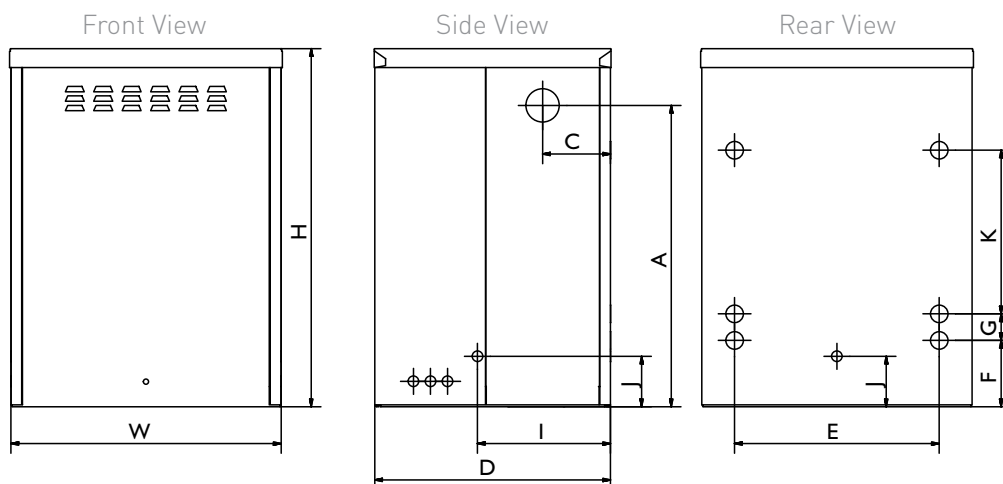

Model	26kW
Modulation Range	20-26 kW
Heating Flow	22 mm dia.*
Heating Return	1" BSP
Mains Cold Feed (Copper)	15 mm dia. *
Drain Off Valve	½" BSP
Safety Pressure Valve Outlet (Copper)	15 mm dia. *
Condensate Pipe	22 mm dia. plastic
Circulating Pump	25/60
Integral Expansion Vessel Normal Capacity	12 litres
Expansion Vessel Precharge Pressure	1 bar
Low Pressure Water Switch	✓
Boiler Water Content	24 litres
Min. System Pressure Cold	0.5 bar
Preset Pressure Relief Valve	3 bar
Fuel Type	Diesel
Electrical Supply	230V AC 50Hz 5A
Boiler Thermostat Control	60°C - 80°C
Boiler Safety Limit	110°C
Frost Thermostat	✓
Room Thermostat Connection	230v AC 50Hz
System Type	Supplied sealed

*adaptors available

