




Interleaving for slow flat fading channels

Robert Morelos-Zaragoza
EE161 – San José State University

Slow Rayleigh fading (Jakes' model, $f_m=5$ Hz)

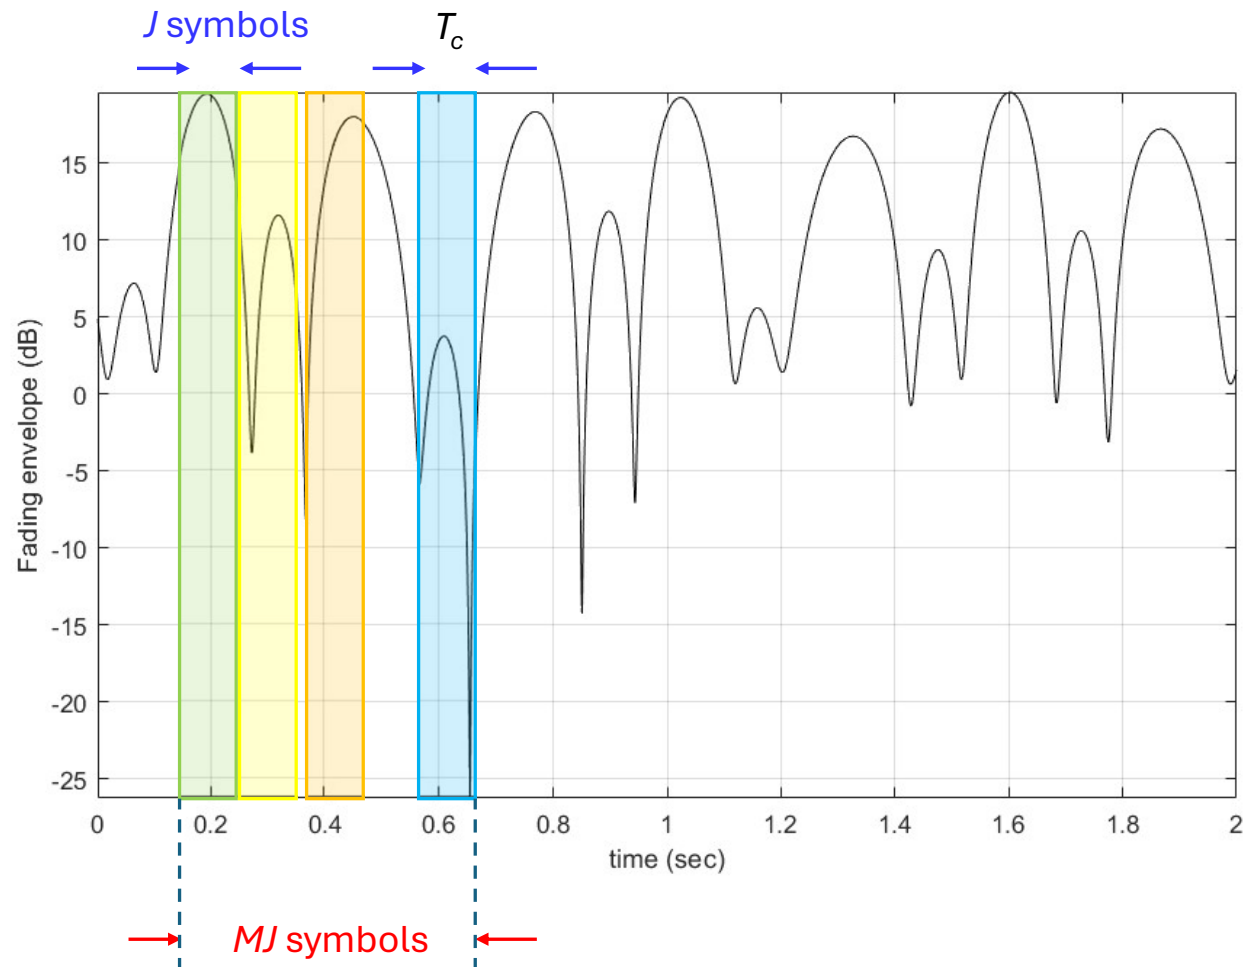


Colors used for
different received
signal energy
levels





Why interleaving?

- The goal is to scramble (***permute the positions*** of) consecutive correlated symbols so that the received sequence after descrambling contains statistically independent symbols.
- This is referred to in the literature as “breaking the correlation” or “spreading bursts of errors”
- Since ***correlated low energy symbols are spread over time***, interleaving allows error correcting codes to operate efficiently, reducing the average probability of a bit error.
- There are many types of interleavers. For simplicity of exposition, here we consider ***rectangular interleavers***.


Interleaving and de-interleaving

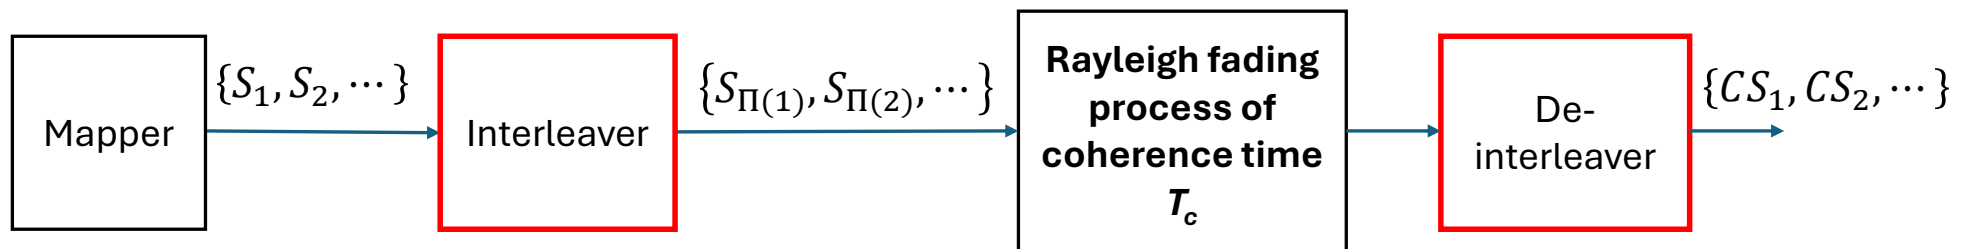


Rectangular interleaver

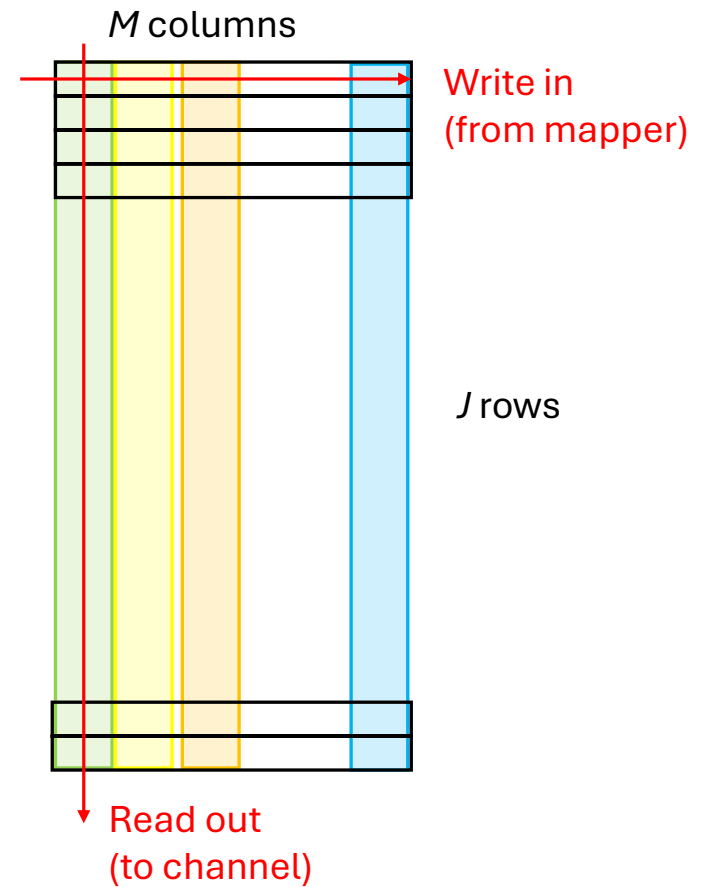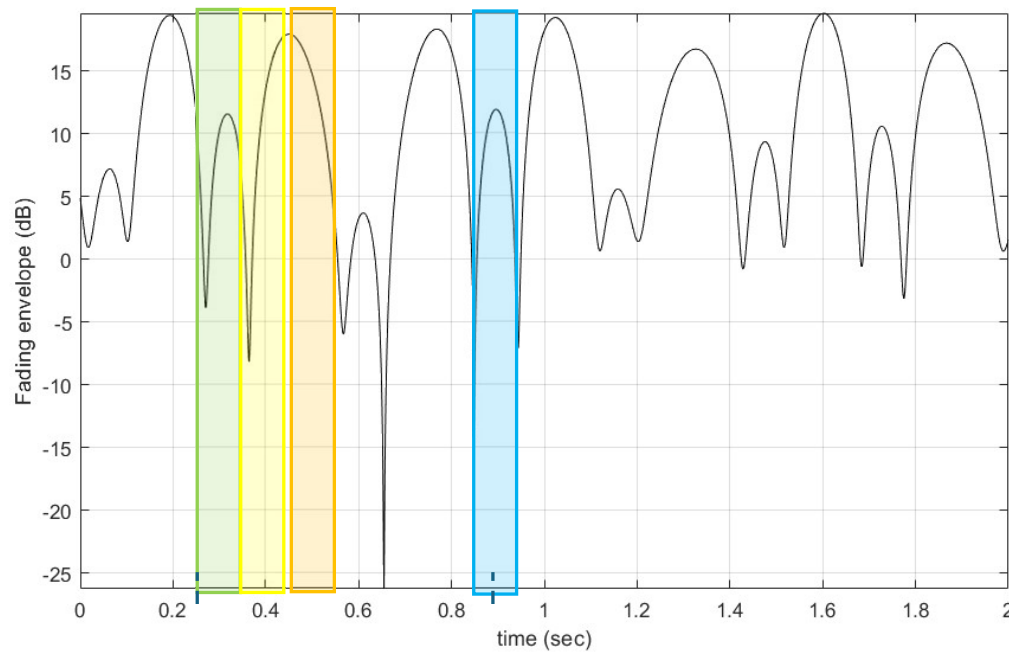

Rectangular de-interleaver

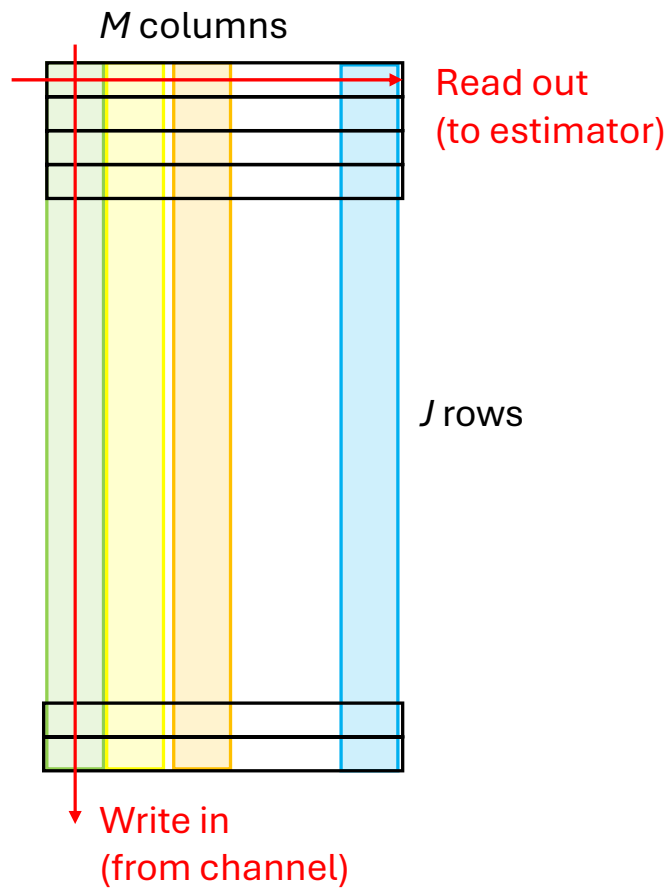

Output sequence:

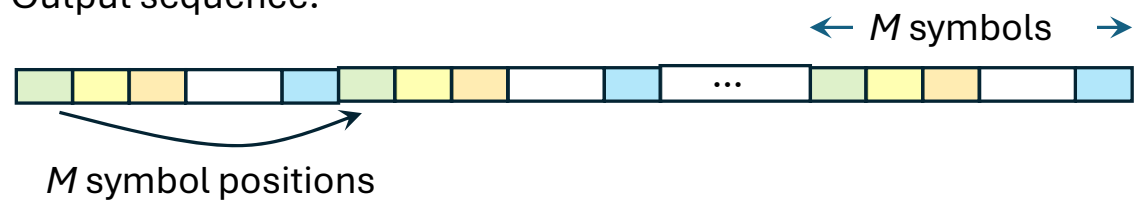

Low-energy symbols are spread over time

- (1) This works as long as $JT > T_c$
- (2) The choice of interleaver parameter M depends on the error correcting code used....

Example: EPC (3,2,2) code with J=2, M=3

