太重集团 TZCO

TZPJ0608HD

Platform Kerja Udara Lift Gunting Ramping 6 Meter



Pengoperasian dan penanganan yang fleksibel

- Radius putar kecil, pengoperasian fleksibel di ruang sempit
- Lubang standar untuk forklift memastikan efisiensi pengangkutan dan perputaran peralatan yang tinggi
- Pembatas jalan yang dapat dilipat memudahkan transportasi

Performa yang andal

- Fungsi peringatan tegangan baterai untuk memastikan masa pakai baterai
- Strip anti benturan memberikan perlindungan yang lebih terhadap goresan dan benturan
- Alarm pendeteksi lubang dan sistem pendeteksi kemiringan memberikan pengalaman kerja yang aman

Biaya perawatan rendah


- Desain pintu pemeliharaan ganda untuk perawatan yang mudah
- Diagnosis kerusakan mempermudah penyelesaian masalah tepat waktu
- Tingkat standardisasi komponen yang tinggi, tidak ada tekanan pada ketersediaan suku cadang

Konfigurasi Standar

-GPS
-Pengontrolan Proporsional
-Bel Peringatan Bahaya
-Lampu Strobo Kerja
-Sistem Pengunci Pintu Kerja
-Perlindungan otomatis dari lubang jalanan
-Sistem Penurunan Darurat
-Tombol Berhenti Darurat
-Sistem Diagnosa Kerusakan
-Sistem Perlindungan Kemiringan
-Sistem Penggerak penuh mandiri
-Platform Ekstensi Satu Arah
-Sistem Perlindungan Pengisian Daya
-Batang Penyangga Inspeksi Keselamatan
-Lubang Standar untuk Forklift

Fitur Opsional

-Pembatas ketinggian tahan benturan
-Baterai lithium graphene

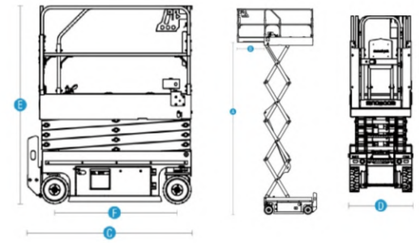

Parameter Teknis Utama

Type	Item	Unit	TZPJ0608HD
Dimensional Parameters	Maximum Working Height	m	7.8
	A Maximum Platform Height	m	5.8
	Minimum Platform Height	m	1.03
	C Overall Length	m	1.8
	Overall Length (without ladder)	m	1.615
	D Overall Width	m	0.76
	Overall Height (with guardrail folded)	m	1.78
	E Overall Height (with guardrail not folded)	m	2.14
	Work Platform Dimensions (Length & Width)	m	1.64X0.76
	B Platform Extension Dimensions	m	0.9
	F Wheelbase	m	1.33
	Minimum Ground Clearance (raised/stowed)	cm	2/10
	Tires		305*114
Weight Parameters	Overall Weight	kg	1240
Performance Parameters	Safe Working Load	kg	230
	Extended Platform Working Load	kg	113
	Maximum Number of Workers (Indoor/Outdoor)		2
	Travel Speed (raised/stowed)	km/h	0.8/3.5
	Minimum Turning Radius (Outer Side)	m	1.49
	Gradeability	%	25
	Lifting/Lowering Time	s	20s-25s/30s-35s
	Maximum Working Angle (Lateral/Longitudinal)	°	1.5/3
Power Parameters	Hydraulic Tank Capacity	L	12
	Battery Capacity		24V/178Ah
	Travel Motor		DC24V X 1.5KW
	Lifting Motor		
	Charger (Input Voltage/Output Current)		Input 100-260Vac/ Output 30A