太重集团 TZCO

# TZPJ0808HD

## Platform Kerja Udara Lift Gunting 8 Meter

### Pengoperasian dan penanganan yang fleksibel

- Radius putar kecil, pengoperasian fleksibel di ruang sempit
- Lubang standar untuk forklift memastikan efisiensi pengangkutan dan perputaran peralatan yang tinggi
- Pembatas jalan yang dapat dilipat memudahkan transportasi

### Performa yang andal

- Fungsi peringatan tegangan baterai untuk memastikan masa pakai baterai
- Strip anti benturan memberikan perlindungan yang lebih terhadap goresan dan benturan
- Alarm pendeteksi lubang dan sistem pendeteksi kemiringan memberikan pengalaman kerja yang aman

### Biaya perawatan rendah

- Desain pintu pemeliharaan ganda untuk perawatan yang mudah
- Diagnosis kerusakan mempermudah penyelesaian masalah tepat waktu
- Tingkat standardisasi komponen yang tinggi, tidak ada tekanan pada ketersediaan suku cadang







### ●Konfigurasi Standar

-GPS
-Perlindungan otomatis dari lubang jalanan
-Penggerak penuh mandiri
-Pengontrolan proporsional
-Sistem penurunan darurat
-Platform ekstensi satu arah
-Bel peringatan bahaya
-Tombol berhenti darurat
-Sistem perlindungan pengisian daya
-Lampu strobo kerja
-Sistem diagnosis kerusakan
-Batang penyangga inspeksi keselamatan
-Pintu pengunci otomatis
-Sistem perlindungan kemiringan
-Lubang standar untuk forklift
-Pembatas ketinggian tahan benturan

### ●Fitur Opsional

-Baterai kapasitor berbasis karbon -Sistem pendeteksi berat -Kontrol penurunan proporsional

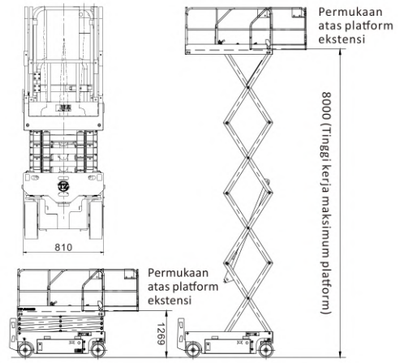


### ●Parameter Teknis Utama

| Type | Item | Unit | TZPJ0808HD |
|---|---|---|---|
| Dimensional Parameters | Maximum Working Height | m | 10 |
| | Maximum Platform Height | m | 8 |
| | Minimum Platform Height | m | 1.24 |
| | Overall Length | m | 2.48 |
| | Overall Length (without ladder) | m | 2.27 |
| | Overall Width | m | 0.81 |
| | Overall Height (with guardrail folded/unfolded) | m | 1.90/2.34 |
| | Work Platform Dimensions (Length × Width) | m | 2.25 x 0.80 |
| | Maximum Platform Extension Dimension | m | 0.9 |
| | Wheelbase | m | 1.89 |
| | Minimum Ground Clearance (raised/stowed) | cm | 2/10 |
| | Tires | | D381x127 (Solid) |
| Performance Parameters | Safe Working Load | kg | 230 |
| | Extended Platform Working Load | kg | 113 |
| | Maximum Number of Workers (Indoor/Outdoor) | | 2/0 |
| | Maximum Travel Speed (raised/stowed) | km/h | 0.8/3.5 |
| | Minimum Turning Radius (Inner/Outer) | m | 2.22 |
| | Gradeability | % | 25 |
| | Lifting/Lowering Time | s | 35s-40s/35s-40s |
| | Maximum Working Angle (Lateral/Longitudinal) | ° | 1.5/3 |
| Power Parameters | Hydraulic Tank Capacity | L | 20 |
| | Battery Capacity | | 24V/225Ah |
| | Travel Motor | | DC24V/4.5kW |
| | Lifting Motor | | |
| | Steering Motor | | |
| | Charger (Input Voltage/Output Current) | | Input 100-260Vac / Output 30A |
| Weight Parameters | Overall Weight | kg | 2240 |
| Standard Parameters | Compliant with Standards | | JB/T9229-2024 |