太重集团
TZCO

TZPJ1212HD

Platform Kerja Udara Lift Gunting 12 Meter



Pengoperasian dan penanganan yang fleksibel

- Radius putar kecil, pengoperasian fleksibel di ruang sempit
- Lubang standar untuk forklift memastikan efisiensi pengangkutan dan perputaran peralatan yang tinggi
- Pembatas jalan yang dapat dilipat memudahkan transportasi

Performa yang andal

- Fungsi peringatan tegangan baterai untuk memastikan masa pakai baterai
- Strip anti benturan memberikan perlindungan yang lebih terhadap goresan dan benturan
- Alarm pendeteksi lubang dan sistem pendeteksi kemiringan memberikan pengalaman kerja yang aman

Biaya perawatan rendah


- Desain pintu pemeliharaan ganda untuk perawatan yang mudah
- Diagnosis kerusakan mempermudah penyelesaian masalah tepat waktu
- Tingkat standardisasi komponen yang tinggi, tidak ada tekanan pada ketersediaan suku cadang

●Konfigurasi Standar

-GPS
-Pengontrolan proporsional
-Bel peringatan bahaya
-Lampu strobo kerja
-Sistem pengunci pintu kerja
-Perlindungan otomatis dari lubang jalanan
-Sistem penurunan darurat
-Tombol berhenti darurat
-Sistem diagnosa kerusakan
-Sistem perlindungan kemiringan
-Sistem penggerak penuh mandiri
-Platform ekstensi satu arah
-Sistem perlindungan pengisian daya
-Batang penyangga inspeksi keselamatan
-Lubang standar untuk forklift

●Fitur Opsional

-Pembatas ketinggian tahan benturan
-Motor sinkron magnet permanen (PMSM)
-Baterai lithium graphene

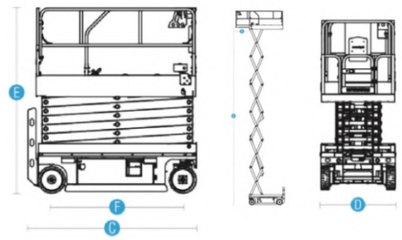

●Parameter Teknis Utama

Type	Item	Unit	TZPJ1212HD
Dimensional Parameters	Maximum Working Height	m	14
	A Maximum Platform Height	m	12
	Minimum Platform Height	m	1.45
	C Overall Length	m	2.48
	Overall Length (without ladder)	m	2.26
	D Overall Width	m	1.16
	Overall Height (with guardrail folded)	m	2.09
	E Overall Height (with guardrail not folded)	m	2.55
	Work Platform Dimensions (Length & Width)	m	2.25X1.13
	B Platform Extension Dimensions	m	0.9
	F Wheelbase	m	1.89
	Minimum Ground Clearance (raised/stowed)	cm	2/10
	Tires		Ø 381*127
Weight Parameters	Overall Weight	kg	2720
Performance Parameters	Safe Working Load	kg	300
	Extended Platform Working Load	kg	113
	Maximum Number of Workers (Indoor/Outdoor)		2/2
	Travel Speed (raised/stowed)	km/h	0.8/3.5
	Minimum Turning Radius (Outer Side)	m	2.35
	Gradeability	%	25
	Lifting/Lowering Time	s	48s-55s/45s-50s
	Maximum Working Angle (Lateral/Longitudinal)	°	1.5/3
Power Parameters	Hydraulic Tank Capacity	L	20
	Battery Capacity		24V/274Ah
	Travel Motor		DC24VX4.5KW
	Lifting Motor		
	Charger (Input Voltage/Output Current)		Input 100-260Vac/ Output 30A