太重集团 TZCO

# TZPJ1414HD

## Platform Kerja Udara Lift Gunting 14 Meter

### Pengoperasian dan penanganan yang fleksibel

- Radius putar kecil, pengoperasian fleksibel di ruang sempit
- Lubang standar untuk forklift memastikan efisiensi pengangkutan dan perputaran peralatan yang tinggi
- Pembatas jalan yang dapat dilipat memudahkan transportasi

### Performa yang andal

- Fungsi peringatan tegangan baterai untuk memastikan masa pakai baterai
- Strip anti benturan memberikan perlindungan yang lebih terhadap goresan dan benturan
- Alarm pendeteksi lubang dan sistem pendeteksi kemiringan memberikan pengalaman kerja yang aman

### Biaya perawatan rendah

- Desain pintu pemeliharaan ganda untuk perawatan yang mudah
- Diagnosis kerusakan mempermudah penyelesaian masalah tepat waktu
- Tingkat standardisasi komponen yang tinggi, tidak ada tekanan pada ketersediaan suku cadang







### Konfigurasi Standar

-GPS
-Pengontrolan proporsional
-Bel peringatan bahaya
-Lampu strobo kerja
-Sistem pengunci pintu kerja
-Perlindungan otomatis dari lubang jalanan
-Sistem penurunan darurat
-Tombol berhenti darurat
-Sistem diagnosa kerusakan
-Sistem perlindungan kemiringan
-Sistem penggerak penuh mandiri
-Platform ekstensi satu arah
-Sistem perlindungan pengisian daya
-Batang penyangga inspeksi keselamatan
-Lubang standar untuk forklift

### Fitur Opsional

-Pembatas ketinggian tahan benturan
-Motor sinkron magnet permanen (PMSM)
-Baterai lithium graphene

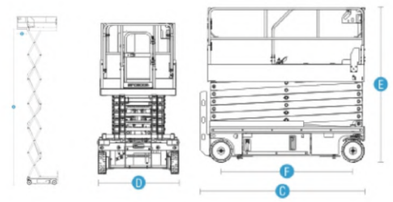


### Parameter Teknis Utama

| Type | Item | Unit | TZPJ1414HD |
|---|---|---|---|
| Dimensional Parameters | Maximum Working Height | m | 16 |
| | A Maximum Platform Height | m | 14 |
| | Minimum Platform Height | m | 1.5 |
| | C Overall Length | m | 2.84 |
| | Overall Length (without ladder) | m | 2.63 |
| | D Overall Width | m | 1.39 |
| | Overall Height (with guardrail folded) | m | 2.15 |
| | E Overall Height (with guardrail not folded) | m | 2.6 |
| | Work Platform Dimensions (Length & Width) | m | 2.64 x 1.13 |
| | B Platform Extension Dimensions | m | 0.9 |
| | F Wheelbase | m | 2.23 |
| | Minimum Ground Clearance (raised/stowed) | cm | 2/10 |
| | Tires | | Ø 381*127 |
| Weight Parameters | Overall Weight | kg | 3720 |
| Performance Parameters | Safe Working Load | kg | 250 |
| | Extended Platform Working Load | kg | 113 |
| | Maximum Number of Workers (Indoor/Outdoor) | | 2/2 |
| | Travel Speed (raised/stowed) | km/h | 0.8/3.5 |
| | Minimum Turning Radius (Outer Side) | m | 2.64 |
| | Gradeability | % | 25 |
| | Lifting/Lowering Time | s | 55s-60s/48s-55s |
| | Maximum Working Angle (Lateral/Longitudinal) | ° | 1.5/3 |
| Power Parameters | Hydraulic Tank Capacity | L | 25 |
| | Battery Capacity | | 24V/274Ah |
| | Travel Motor | | DC24V X 4.5KW |
| | Lifting Motor | | |
| | Charger (Input Voltage/Output Current) | | Input 100-260Vac/ Output 30A |