太重集团
TZCO

TZPZ26KEF-L

Platform Kerja Udara Dengan Lengan Lurus 26 Meter



Performa luar biasa

- Kemampuan melintasi medan yang tangguh dan mudah menangani berbagai kondisi kerja kompleks
- Desain poros mengambang meningkatkan kinerja off-road dan kemampuan beradaptasi pada berbagai medan kerja
- Sistem kontrol sensitif beban dengan respons yang stabil, akurat, dan cepat; sangat efisien dan hemat energi

Biaya operasional rendah

- Keandalan yang tinggi dan biaya perawatan rendah
- Dapat diangkut menggunakan truk derek, biaya transportasi yang rendah.
- Kompatibilitas komponen yang tinggi, kebutuhan akan suku cadang menjadi lebih sedikit

Keuntungan tinggi

- Investasi rendah, biaya operasional dan pemeliharaan rendah, serta pengembalian investasi yang tinggi


TZPZ26KEF-L Platform Kerja Udara Dengan Lengan Lurus 26 Meter

●Konfigurasi Standar

-Poros mengambang/ Sistem penggerak roda empat/ Rem empat roda/ Kemudi dua roda
-Pelepasan mekanis untuk rem berjalan
-Kontrol hidrolik proportional/ Kontrol tuas proportional
-Sudut kemiringan maksimum yang diperbolehkan 5°
-Rotasi struktur atas 360° kontinu
-Layar pintar 5 inci
-Sistem diagnosa kerusakan
-Sistem penimbangan platform
-Sistem perlindungan kemiringan
-sistem penghentian darurat
-sistem penurunan darurat
-Perangkat anti-jepit
-Platform kerja perataan hidrolik/ Rotasi platform kerja
-Pemeriksaan belakang/ konfirmasi berkendara
-Lampu peringatan keselamatan
-Klakson dan bel peringatan keselamatan
-Siaran suara
-Pemantauan jarak jauh gps

●Fitur Opsional

-Kabel daya AC ke platform
-Ban padat
-Lampu kerja platform
-Perangkat anti benturan
-Kontrol jarak jauh nirkabel

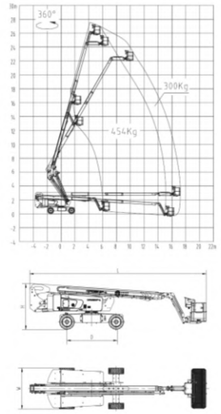

●Parameter Teknis Utama

Type	Item	Unit	TZPZ26KEF-L
Dimensions	Overall length	m	10.74
	Overall width	m	2.49
	Overall height	m	2.78
	Max. platform height	m	25.8
	Max. working height	m	27.8
	Max. horizontal reach (restricted/unrestricted)	m	15.1/17.2
	Max. horizontal working range (restricted/unrestricted)	m	15.7/17.8
	Platform dimension (LxWxH)	m	2.44 x 0.91 x 1.1
	Wheelbase D	m	3
	Ground clearance	m	0.41
	Tire	-	355/55-24.5 Solid/ 355/55D625 Solid
Weight parameters	Total weight	kg	12892
Performance parameters	Platform rated load (restricted/unrestricted)	kg	454/300
	Max. platform occupants (restricted/unrestricted)	worker	3/2
	Platform rotation angle	°	180
	Turntable rotation angle	°	360 continous
	Max. allowable tilt angle	°	5
	Turntable tail swing	m	2.52
	Travel speed (stowed)	km/h	0 - 4.8
	Travel speed (raised)	km/h	0 - 1.1
	Grade-ability (4WD)	%	40
	Turning radius (inner wheel/outer wheel)	m	3.3/6.58
	Max. allowable side force	N	400
	Max. allowable wind speed	m/s	12.5
Power parameters	Drive x Steer	-	4WD x 2WS
	Battery specification	V/Ah	80/405
	Charger (output voltage/output current)	V/A	80/80
	Hydraulic oil tank capacity	L	180