
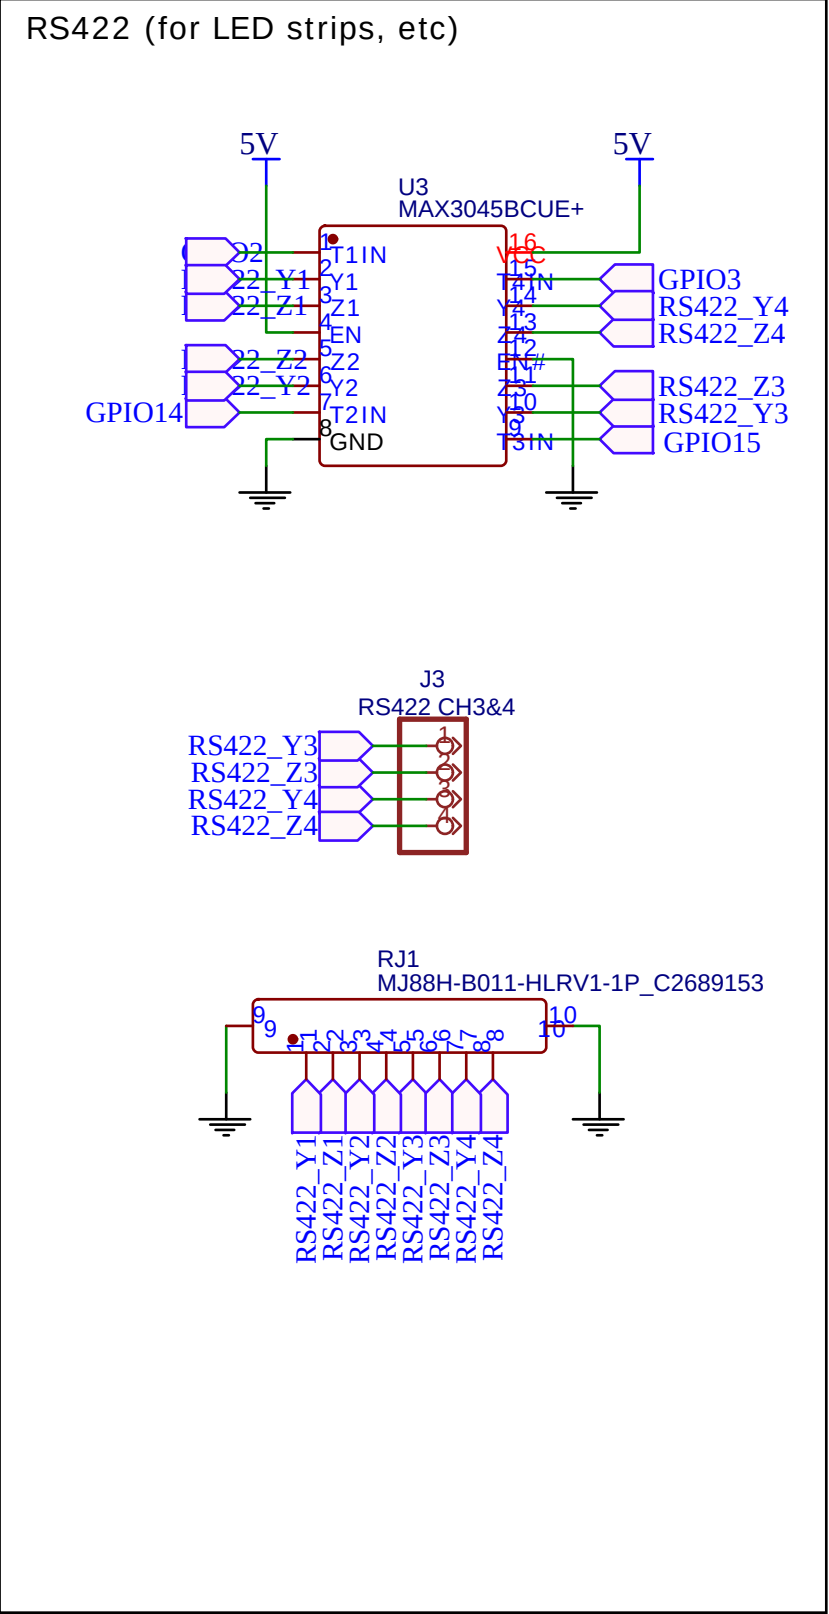
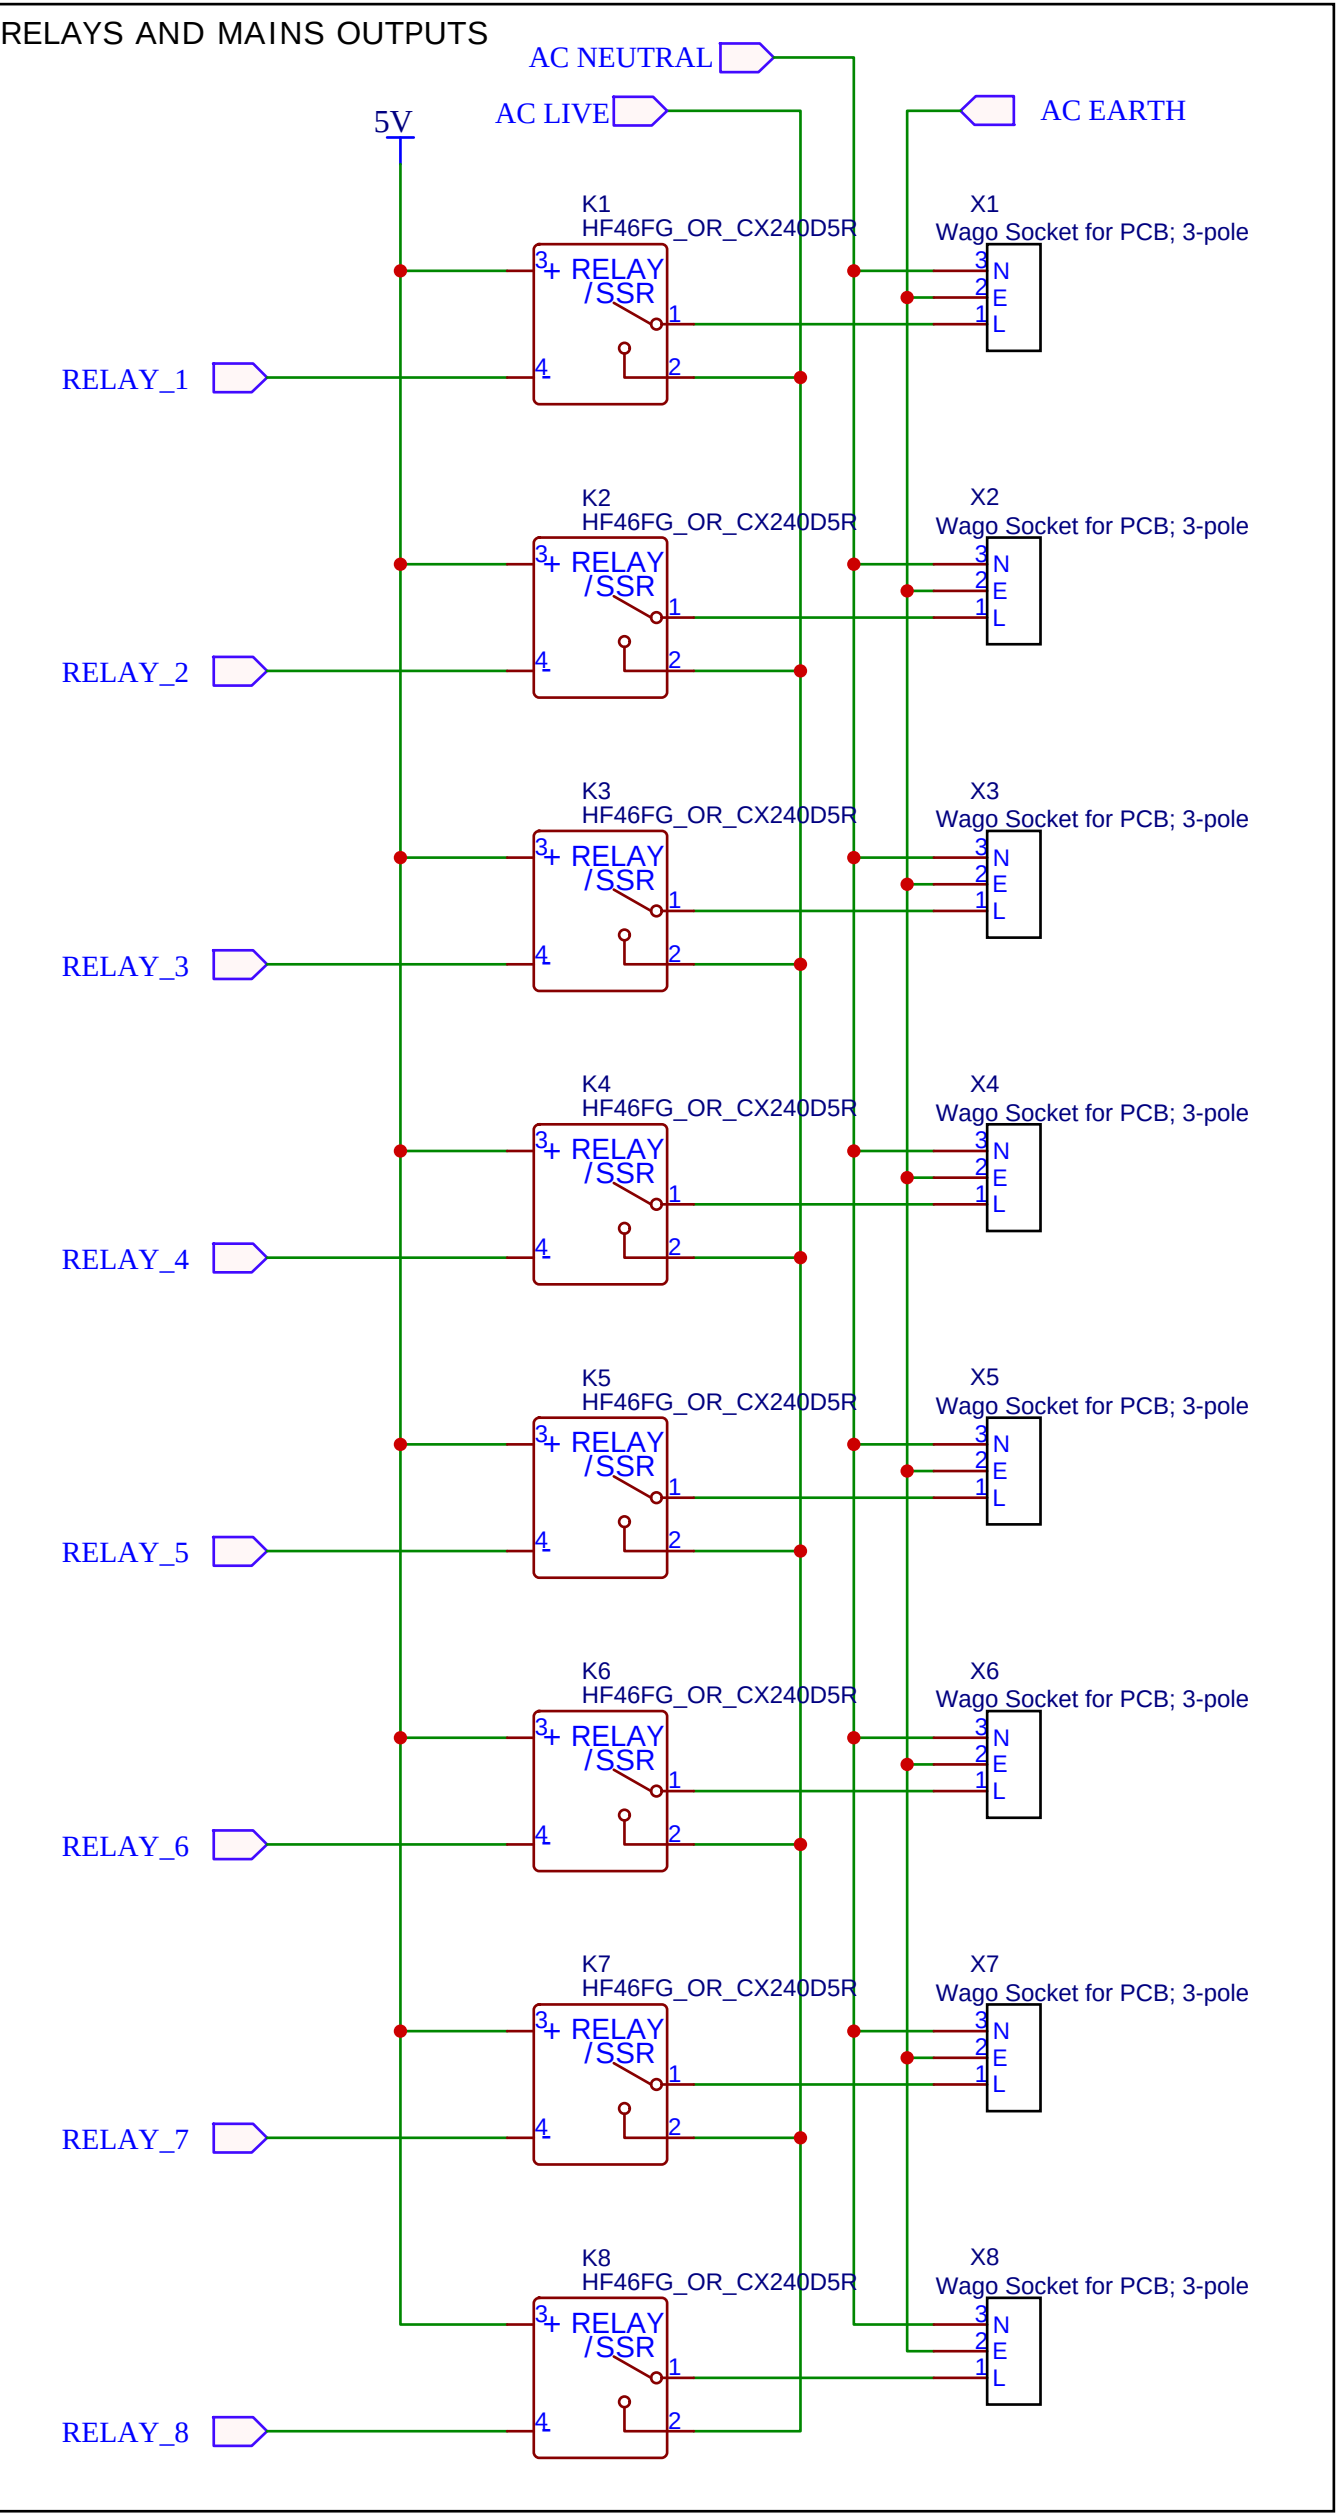
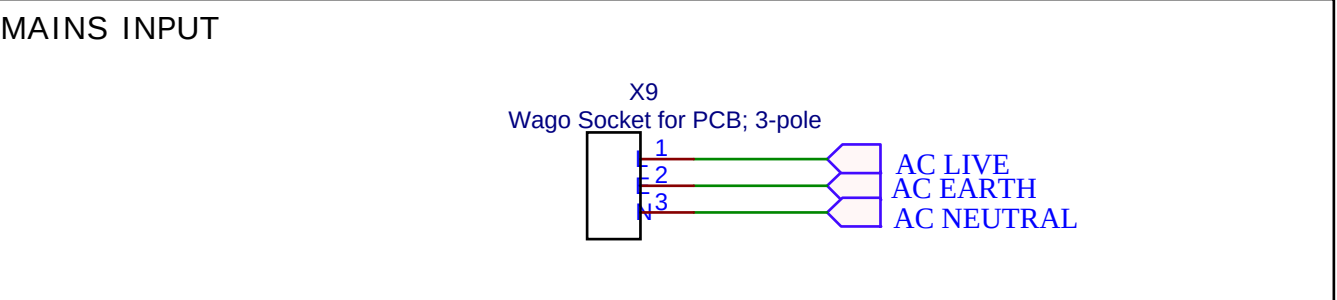
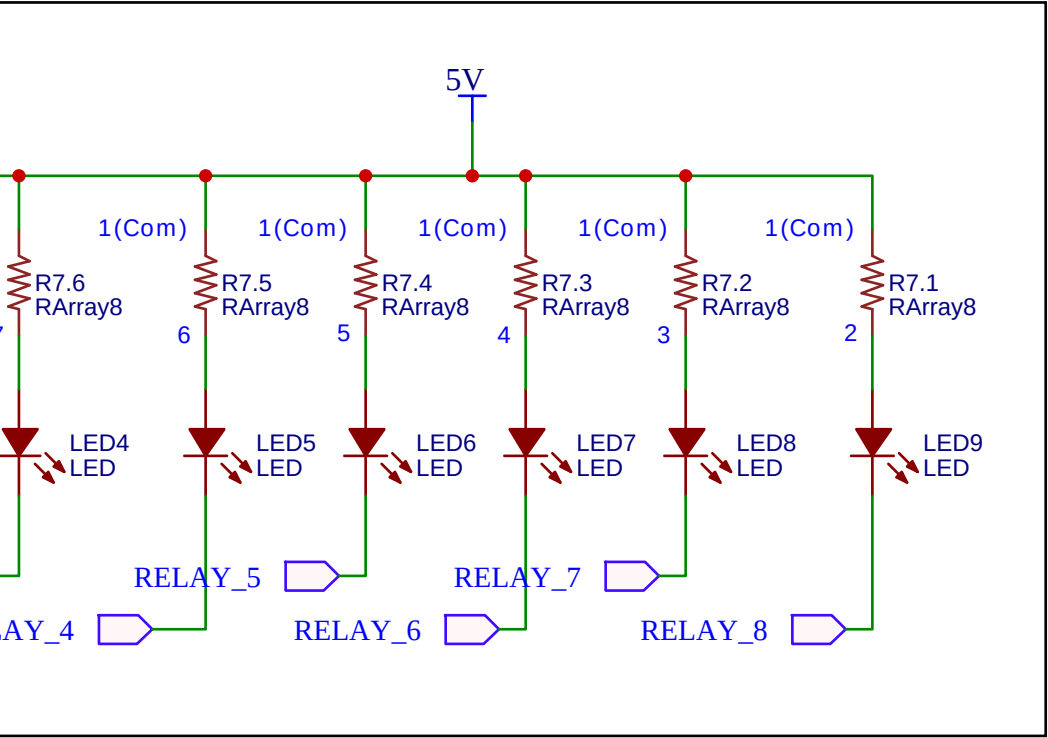
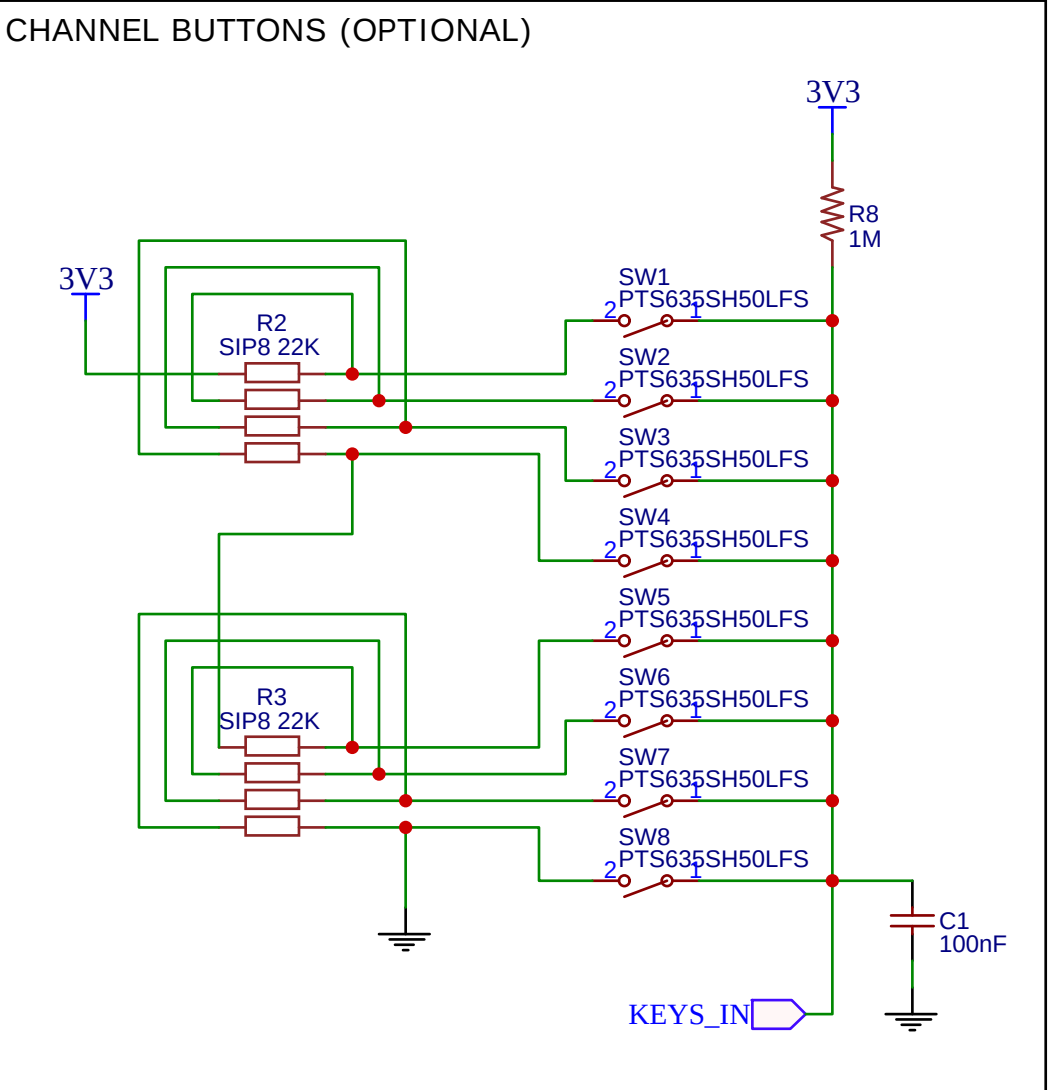
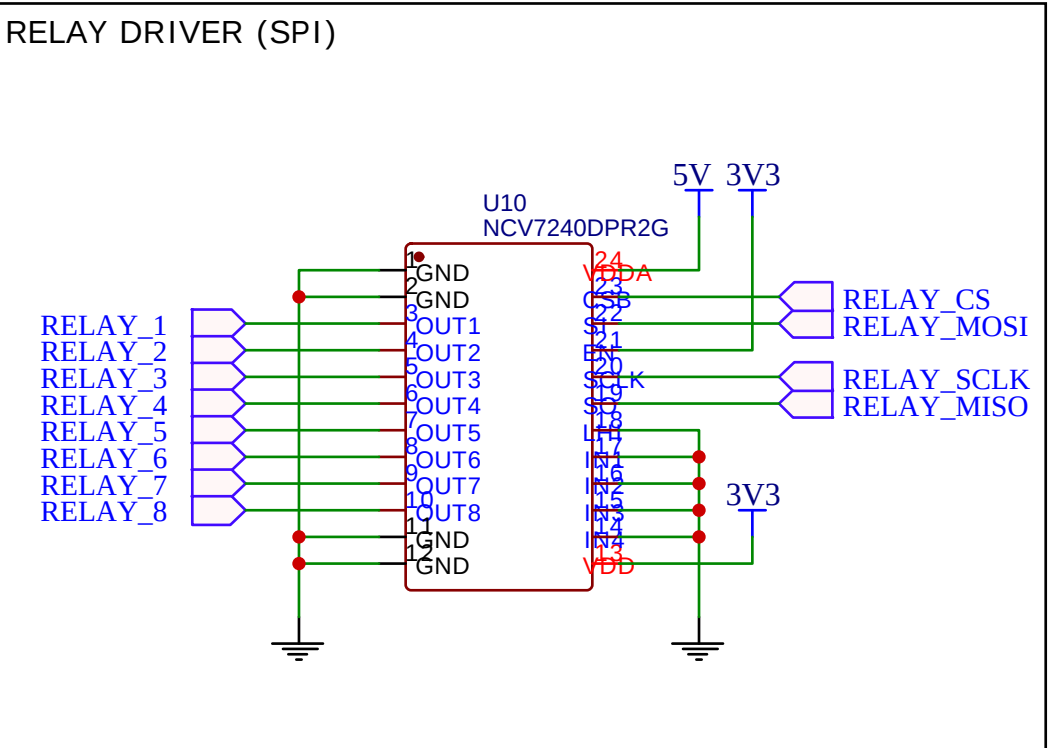
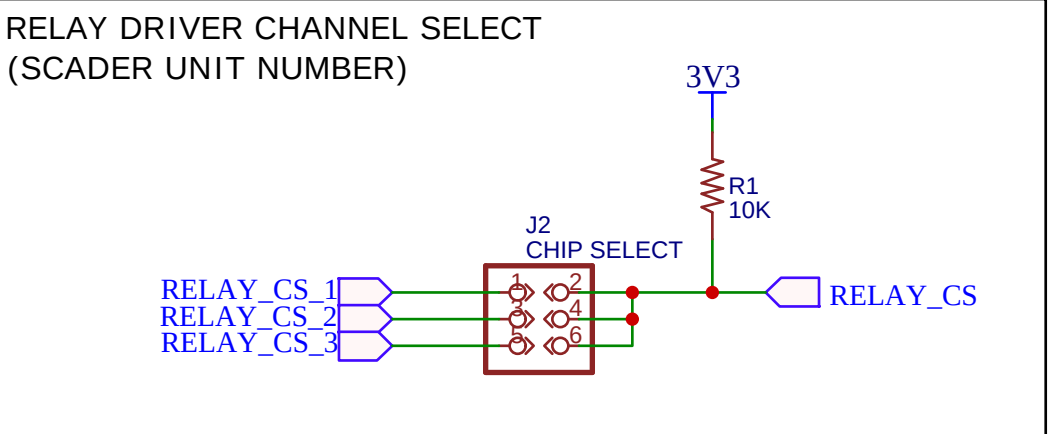
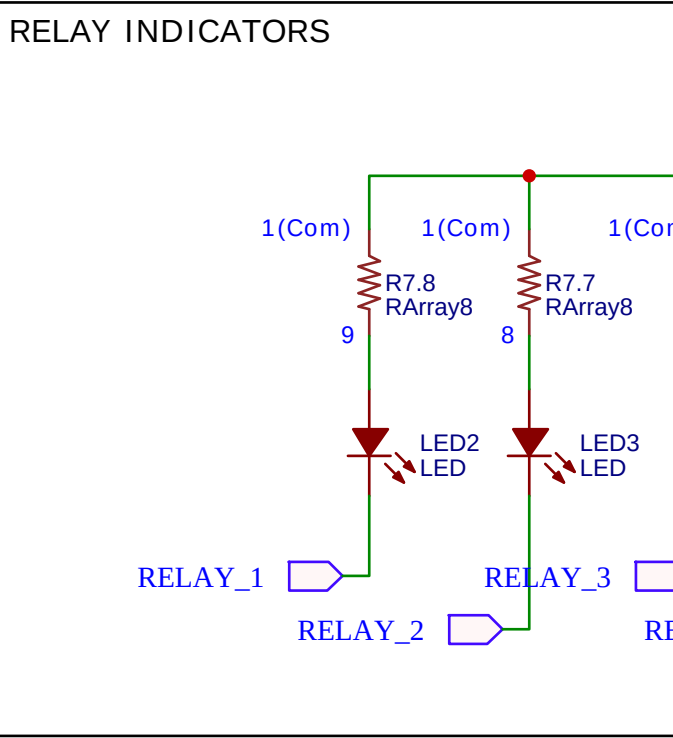
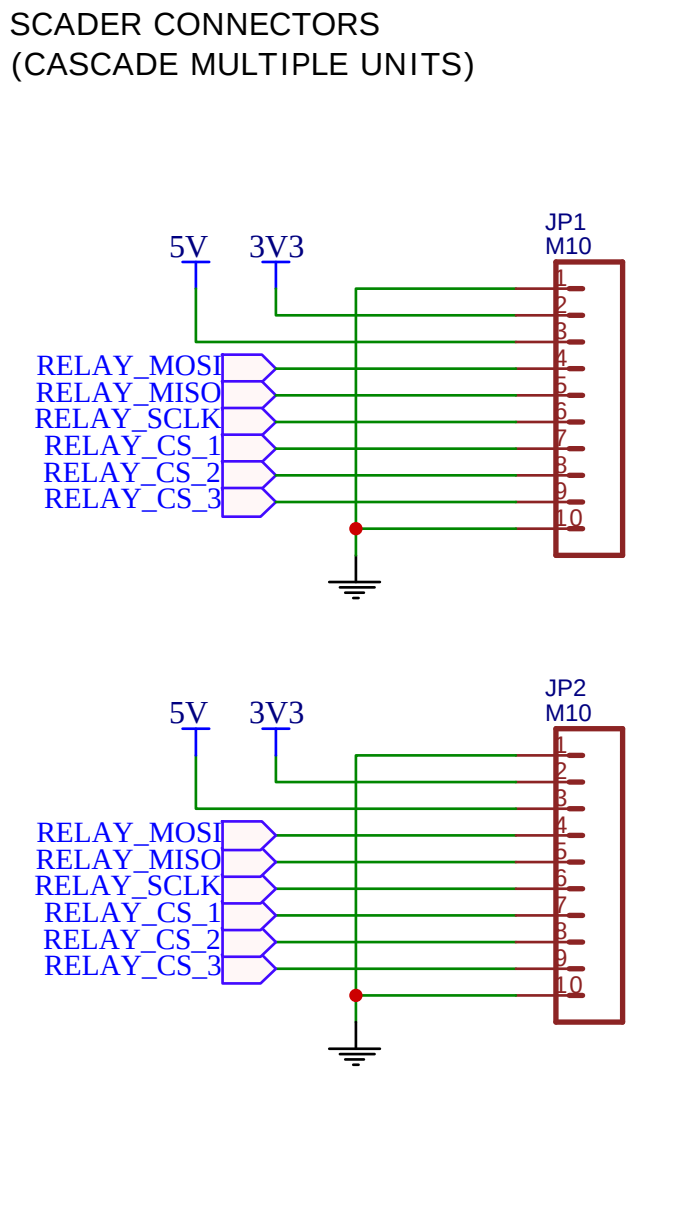
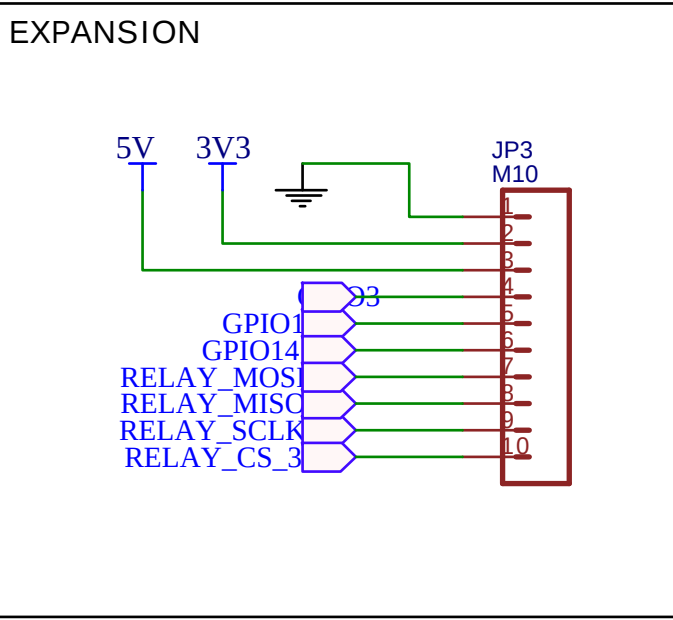
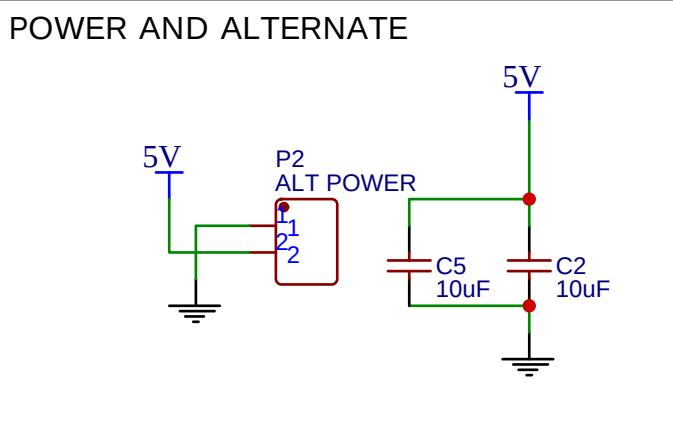
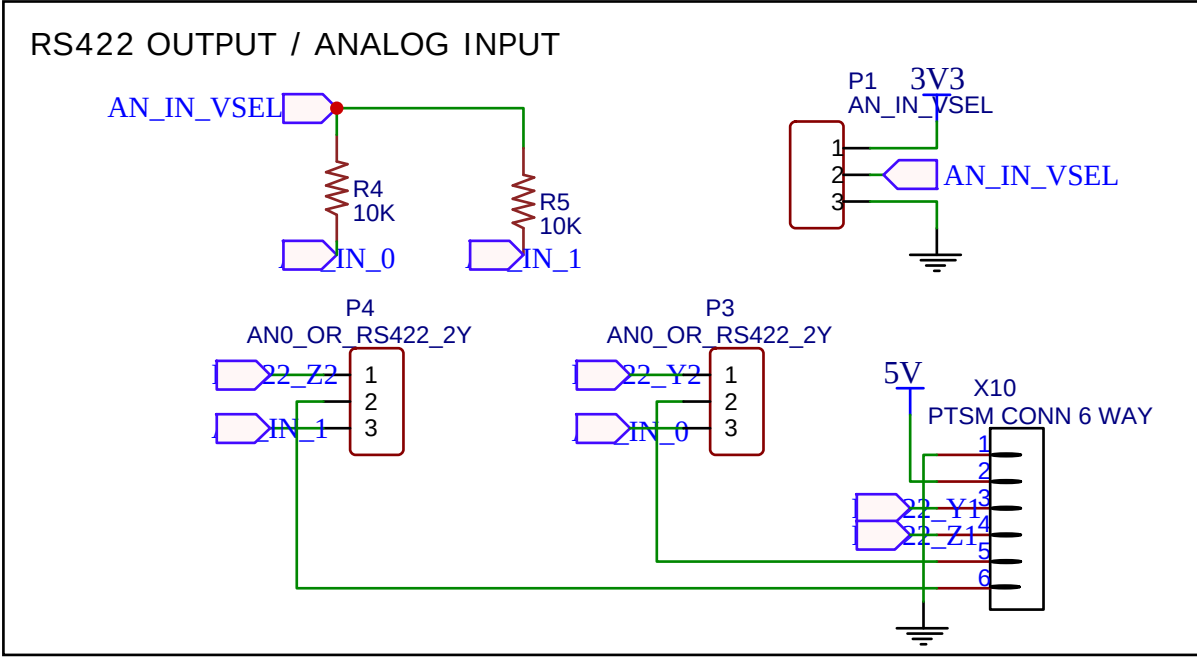
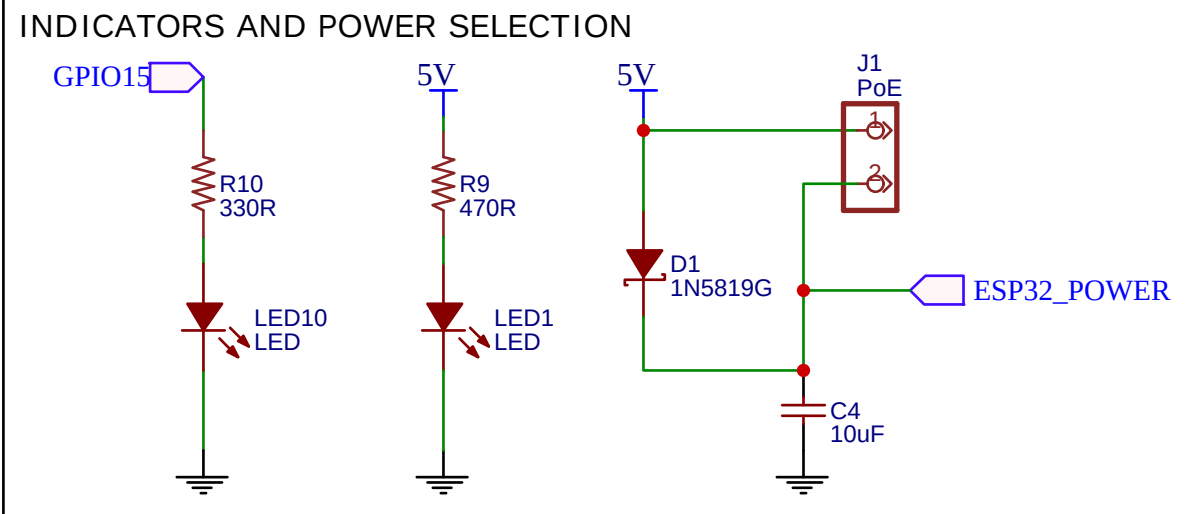
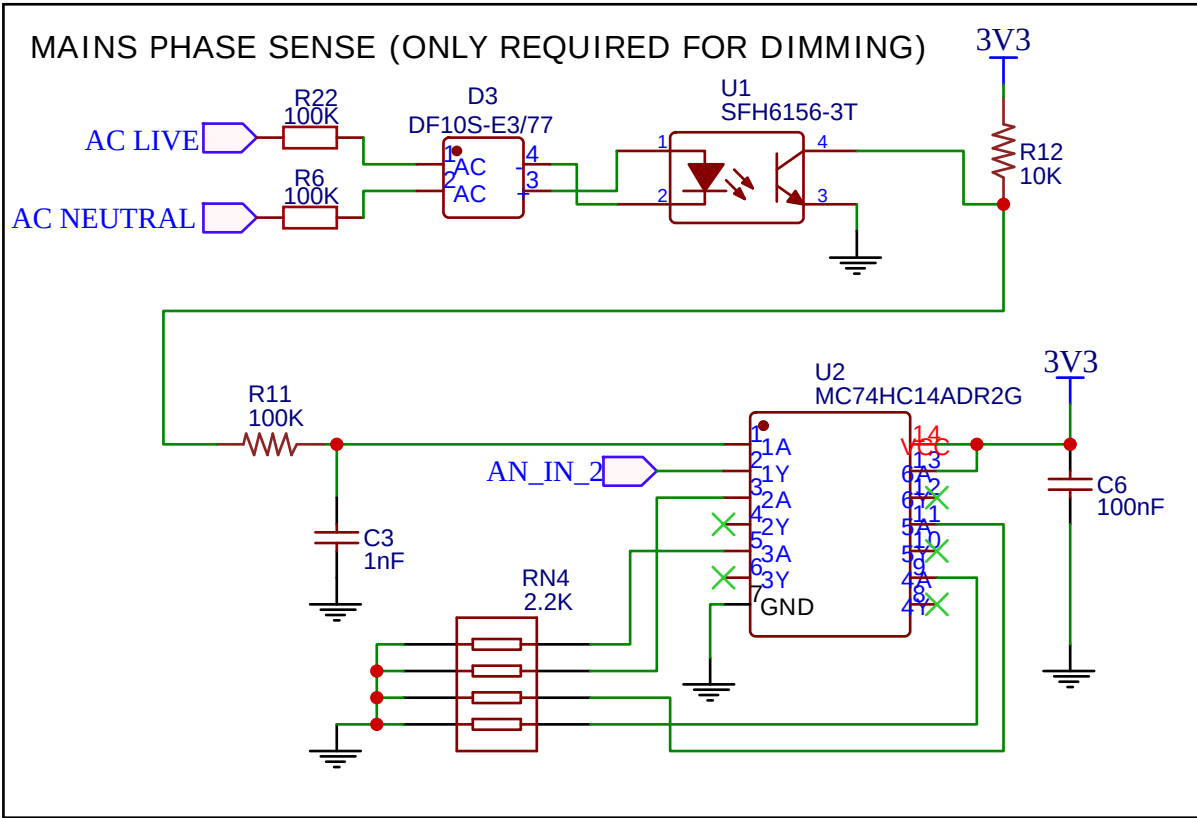
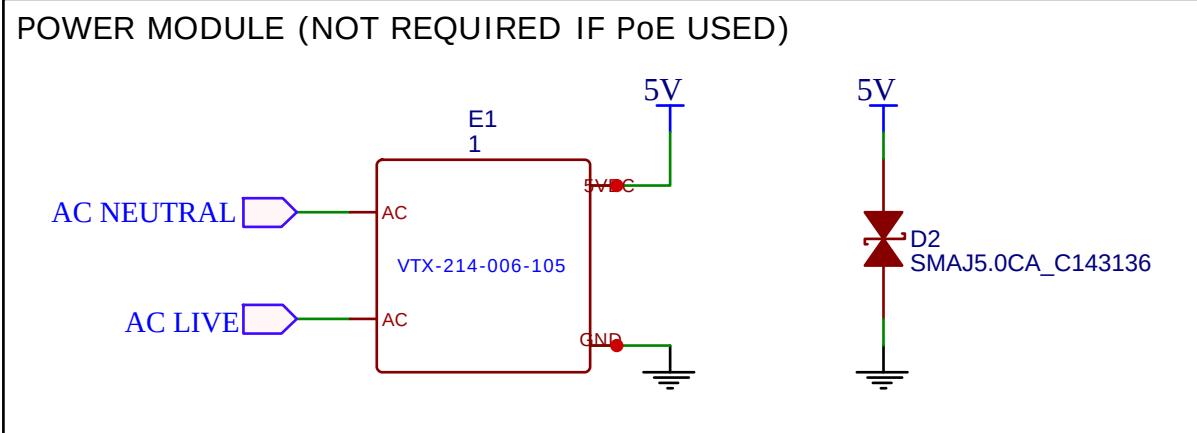


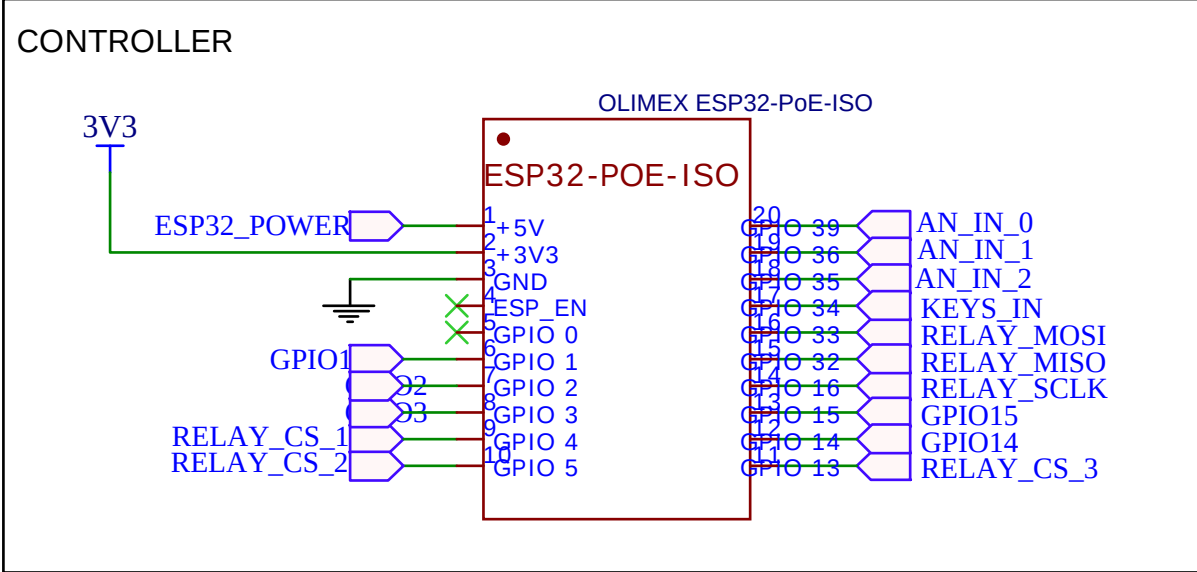

Changes for next version

- pull down on ANIN2 10K so not floating on mains sync input
- RJ45 connector is intended to be sunken - change to a non-sunken one
- Make sure the twisted pair assignments on the RJ45 conn make sense even with a regularly wired Cat5 cable
- Change extension ports to IDC connectors 2x10 with one side all grounded
- extension port move up away from mounting holes
- could move smaller mounting holes further apart so lower one near main mounting hole
- Align components better
- Maybe switch to all SMD?
- Silk screen could be improved
- redo silk for poe module mounting
- smaller holes for poe module mounting
- Move relay LEDs up and next to relay
- Move Olimex module down
- Edge mount push buttons
- Move jumpers for RS422 to a better place
- Proto area smaller and maybe more underneath Olimex
- 

2024-07-05 Changes

- Added RS422 drivers for LED strips
- Added RJ45 for LED strips