

The QMdbSim2 Project

Basic User Documentation

Document History

2026.06.29 – Initial documentation. Caveat emptor.

Prerequisites

If you haven't already done so, please start with the `QMdbSim2_Overview.pdf`.

I assume that you have experience using Microchip MPLabX or similar tools to create micro-controller device code.

Parts of this project use Java. Pre-compiled JAR files are provided so you don't need to know anything about Java unless you wish to modify/compile the simulator interface code. If so, see API Developer documentation.

Overview

This document details how to get set up to run QMdbSim2 simulations as a Basic User. As a reminder, Basic Users:

- Create top-level schematics containing device-specific symbols, schematics, and DLLs created by Device Developers.
- Create/modify Device Programs (*.elf/*.hex files) that run in the QSpice simulation.

[Old instructions – Need revisions from here forward...]

We will be using example files from the Basic_Demo folder in the project repository. The example implements Microchip PIC16F15213 and PIC16F15214 devices (collectively PIC16F1521x) in a pre-compiled DLL. It also uses the pre-compiled QMdbCS.jar common to all QMdbSim2 simulations. The sources and MPLabX project files are included for the Device Program.

Note: If you have security concerns with executing pre-compiled code – and you should – you can generate these yourself. Those sources are not included in the example files but are available elsewhere in the project files. See the documentation for Device Developers and/or API Developers for more information.

Third-Party Tools

As a Basic User, you need to have Microchip's MPLabX IDE and a 32-bit version of a Java runtime environment (JRE) installed. While a bit annoying, *this a one-time setup*.

MPLabX IDE

I'm assuming that you already use MPLabX to develop programs for Microchip devices. The MPLabX installation contains the Microchip software simulator files used by QMdbSim2 so there's nothing extra to install.

However, you'll need at least version 6.30 for QMdbSim2 projects. Newer versions may work. Older versions of the software simulator have bugs.

Java JRE

As a Basic User, you don't really need to know anything about Java. But you'll need an installed 32-bit version of Java 8 JRE or better.

I really didn't want to say anything beyond that. However, it appears that 32-bit Java is being phased out and harder to find. And, for Basic User functions, I want to keep it simple so here's my recommendation:

Get the Eclipse Adoptium Java 17 JRE available here: [Adoptium -- Download Temurin JDK](#). In the "Filter Releases" section near the top of the page, select "x86" in the Architecture filter. This will show only "Windows x32" with JDK and JRE options. Select JRE for the minimum install.

To the right, it will warn that this is an "Unsupported Platform." Click on the "Show downloads anyway" button and choose MSI or ZIP downloads.

- MSI will run a full installer and put the JRE in "[C:\Program](#) Files (x86)" and offer to set the Java installation location in the PATH variable.
- ZIP, you can unzip it into any folder and it doesn't alter the system configuration.

ZIP is probably better since it doesn't interfere with Java versions already installed and, therefore, shouldn't break anything.

Bottom Line: Either will work. Just make a note of where the JRE is installed for later.

The Demonstration Files

First Test


With the MPLabX and Java tools installed, we're almost ready to run QMdbSim2 projects. Copy the Basic_Demo folder from the repository to your machine. You'll find the following files:

Basic_Demo		
PIC16F1521x_Demo.qsch		Top-level schematic
PIC16F1521x.qsch		Device Schematic
PIC16F1521x.qsym		Device Symbol
Test_PIC16F1521x.elf		Device Program
GPIO_IMPL.qsch		GPIO pin implementation
PIC16F1521x.dll		Device DLL
QMdbCfg.ini		QMdbSim2 configuration file
MPLabX_Source		
PIC16F15213_Cplex.zip		Device Program sources
QMdbCS		
QMdbCS.jar		QMdbSim2 interface to Microchip simulator back-end

We need to make one change before we can run a simulation: Open `QMdbCfg.ini` with an ASCII text editor (e.g., NotePad). Edit the `MplabxRoot=...` and `JdkRoot=...` entries to point to MPLabX and Java JRE installed above. Note that there is also a `QmdbcsJar=.\QMdbCS\QMdbCS.jar` entry which uses a relative path to point the `QMdbCS.jar` file.

If all has gone to plan, you should now be able to run the example simulation. The example demonstrates using the PIC processor to drive 6 LEDs using 3 pins using a technique called “Charlie-Plexing.” (Feel free to Google that.)

Open `PIC16F1521x_Demo.qsch` in QSpice and run the simulation. The simulation will take a bit to run so be patient. If all has gone to plan, you should see a Plot Window like the below:

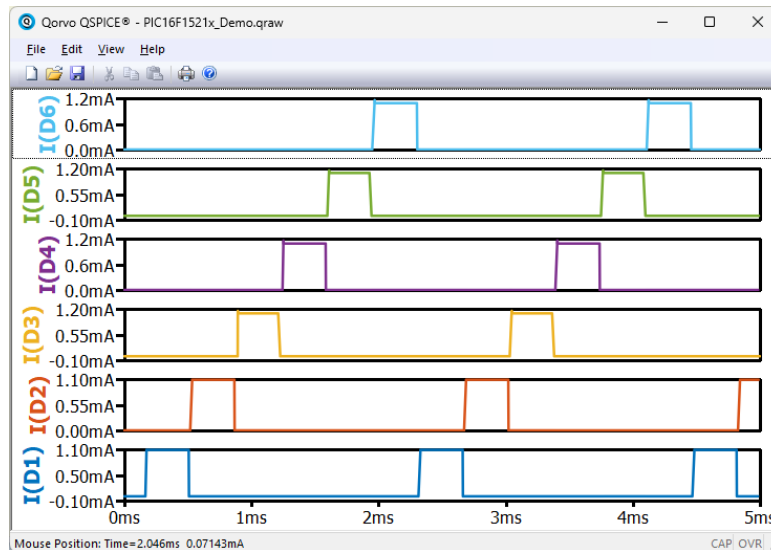

Note: Simulation execution times vary a bit wildly between runs. On my rather average laptop, the first simulation might take 30 seconds. A second run is much faster presumably due to Windows caching. Most of the simulation time is burned with the back-end simulator initialization; the time per simulation instruction step is something like 1.3ms/instruction. Your mileage will vary.

If the simulation run fails, double-check all of the configuration stuff above.


The Top-Level Schematic Device Symbol

As a Basic User, you'll want to be able to create different top-level schematics and change the Device Program (*.hex/*.elf). You'll also likely not want to have unnecessary duplicate copies of configuration and QMdbSim2 implementation files. Let's start with the schematic to see the project features.

The Device Symbol looks like the image to the right.

The pin names should match the Microchip datasheet for the device except for the SIMCLK pin (discussed below).

The small text below the pin names is informational; the Device Developer is encouraged to use these to document alternate pin functionality as found in the datasheet for quick reference.

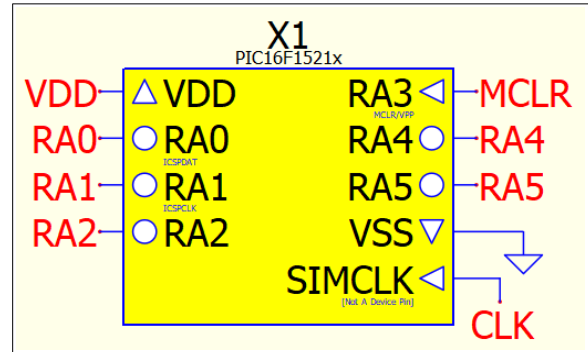

The graphical symbols beside the pins give information about the port direction. In the above, VDD is a voltage supply pin. VSS is a ground pin. RA3 is an input-only pin (points into the center of the symbol). The other RAX pins are bi-directional (GPIO) pins. Not shown is an output-only pin which would point away from the center of the symbol.

That leaves the SIMCLK pin. This should be driven with a pulse source at the device's oscillator frequency divided by the number of ticks per instruction. See below "Device Programming."

The Symbol Properties

Open the Symbol Properties for the Device Symbol. There are several important things to note.

Symbol Type


The Symbol Type is blank. That means that it loads a schematic named by the 1st String Attribute (i.e., PIC16F1521x.qsch). You can look at that schematic but don't modify it – that's a Device Developer activity.

Description

The Description is informational and provided by the Device Developer. You can change it without consequence but I wouldn't....

1st String Attribute

As mentioned, the 1st String Attribute names the Device Schematic which, in turn, loads the Device DLL to drive the back-end simulator. This schematic and

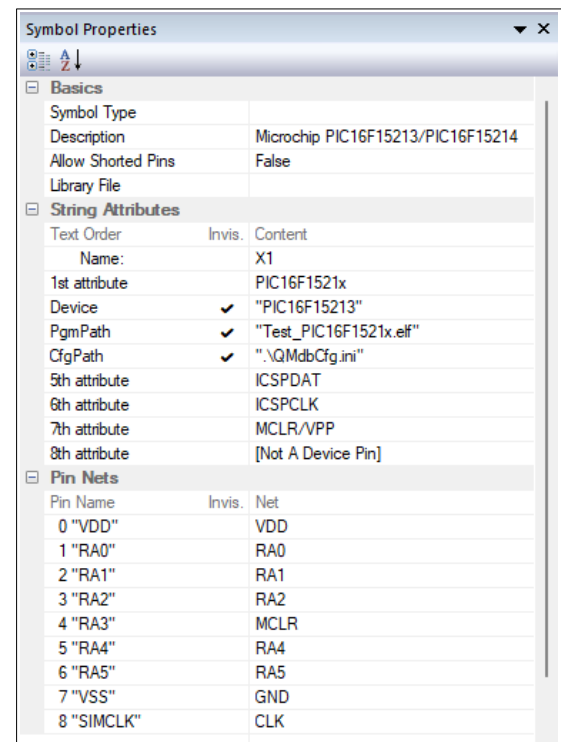

the Device DLL are provided by Device Developers and not intended for modification by Basic Users. You can, of course, open it to see the magic that lies between the Device Symbol and the Device DLL.

Device String Attribute

The Device String Attribute contains a drop-down box to select the hardware device to be emulated. In this case, the PIC16F1521x Device Symbol supports both PIC16F15213 & PIC16F15214 devices so you can choose which one in this drop-down list.

PgmPath String Attribute

The PgmPath String Attribute is the path/filename of the compiled Device Program (*.hex/*.elf). Basic Users create whatever code is useful for their top-level schematic circuit, compile it, and provide the path here. Surround the path with double-quotes.

Note: What happens if you compile the Device Program for one device and select a different device in the Device String Attribute? I can't say for sure. The demonstration program was intended for PIC16F15213 but doesn't fail if PIC16F15214 is selected. The chips are identical other than the 214 has twice as much memory. If the Device Program was compiled for a 214 the 213 was selected, I would expect the simulation to fail during initialization. But I've not tested this.

CfgPath String Attribute

The CfgPath String Attribute gives the path to the QMdbCfg.ini file to use for this simulation. In the PIC16F15213_Demo.qsch Device Symbol, this is set to ".\QMdbCfg.ini" which, of course, picks up the QMdbCfg.ini from the QSpice working directory. And the *.ini in turn specifies that the QMdbCS.jar is in the QMdbCS sub-folder of the working directory.

Rather than copy the *.jar and *.ini files for each QMdbSim2 schematic project, we can relocate these files to fixed locations. You could do this several ways but, for simplicity, put both in a single folder outside of the schematic project. Edit the *.ini to point to that folder/path. And, in top-level schematics, change the Device Symbol CfgPath to point to that location.

Basic User Development

Now that you have successfully configured the tools and run the example, future projects are much easier. Here are the basic steps:

- Obtain device-specific files for your target device (e.g., PIC16F1521x.qsym, PIC16F1521x.qsch, and PIC16F1521x.dll).
- Drag/drop the Device Symbol onto a new schematic.
- Add your top-level circuitry. Include a SIMCLK clock source that ticks at the device *instruction frequency*. (See below.)
- Write your device program code and compile to binary (*.hex/*.elf).
- Edit the device symbol properties (Device, PgmPath, CfgPath).
- Run your simulation.

Device Programs

Here are a few tricks & tips or limitations relevant to writing your Device Program code.

Peripheral Devices

Before you begin designing a project, make sure that any “peripherals” that you intend to use are supported by the Microchip simulator. For example, the datasheet may say that PWM, ADC, SPI, I²C, and/or UART peripherals are included. However, the Microchip simulator may not support the peripherals. If they aren’t present in the MPLabX software simulator, they are likely unsupported.

See Resources section below for a link to the Simulator Peripheral Support By Device.

SIMCLK/Oscillators

As a practical matter, the QSpice simulation must drive the software simulator to step through Device Program instructions. With each step, the QMdbSim2 framework sets simulator pin states from QSpice input pins, advances the software simulation by one instruction cycle, and copies pins states from the software simulator back to QSpice output pins.

While a device may have internal oscillators and may even be able to switch internal oscillator speeds under device program control, the QMdbSim2 framework doesn’t currently support this. Set the SIMCLK to a frequency that matches your expected normal operating frequency. If your Device Program switches frequencies, well, that is not propagated back to QSpice so the simulation simply won’t match real-world behavior.

Electrical Behavior

QMdbSim2 devices are not intended to accurately simulate physical device behavior. They are implemented as QSpice DLL blocks. Input pins (ports) have infinite resistance. Output pins (ports) are voltage sources with fixed internal resistance.

This has consequences: If a physical device pin has dynamically configurable internal weak pull-up resistors, that means that the pin is connected to an open-collector/open-drain transistor. Again, the QMdbSim2 device output pins are voltage sources so, if you want to present the pin to your circuit as OC/OD, you’ll need to add a transistor to the simulated device pin. Further, dynamically switching internal pull-up resistors isn’t supported at all so enable them in your Device Program from the start and add the pull-up resistor to the schematic.

Supply Voltage

This is related to the Peripheral Devices and Electrical Behavior topics above. The Microchip software simulator does not appear to allow changing the supply voltage after the simulation starts. That is, we can’t (AFAIK) change the supply voltage as seen by the simulator during the simulation. The consequence is that supply-voltage-dependent functionality (such as Brown-Out Detection) probably does not work. Further investigation is needed....

Multiple Instances/Stepped Simulations

I have not yet tested to ensure that multiple Device Symbol instances work properly. I also have not yet tested simulations with STEP directives. These may or may not work so proceed with caution.

For more on these topics, see the Device Developer documentation.

Resources

My GitHub QSpice Repository

<https://github.com/robdunn4/QSpice>

In addition to this project, you'll find information about C-Block component concepts ("C-Block Basics"), various C-Block component examples, tips on using VSCode and Visual Studio IDEs for C-Block development and debugging, and links to other useful QSpice-related sites/repositories.

Microchip

[MPLabX IDE](#) (free)

[Microchip MPLabX SDK / MDBCore API](#)

[Microchip Debugger \(MDB\) User's Guide](#) (one)

[Microchip Debugger \(MDB\) User's Guide](#) (another one)

[Simulator Peripheral Support By Device](#)

Microsoft

[Visual Studio Downloads](#) (2026 Community Edition is free)

Java JDK/JRE

[Eclipse Adoptium Temurin](#) (free open source Java JDK/JRE)

Conclusion

I hope that you find this project to be useful or – at least – interesting. Please let me know if you find problems or suggestions for improving the code or this documentation.

You can find me on the QSpice Forums as @RDunn.

--robert