

**CIV102F Assignment # 2 – September 23, 2020**  
Due Wednesday September 30, 2020 at 23:59 Toronto time

**General Instructions**

- There are five questions on this assignment. All questions must be attempted; however, only one question will be graded.
- Submissions which are incomplete and do not contain a serious attempt to solve each question will receive a grade of 0.
- Intermediate steps must be provided to explain how you arrived at your final answer. Receiving full marks requires both the correct process and answer.
- All final answers must be reported using slide-rule precision (ie, four significant figures if the first digit is a “1”, three otherwise), and engineering notation for very large or very small quantities.
- Submissions must be prepared neatly and be formatted using the requirements discussed in the course syllabus. Marks will be deducted for poor presentation of work.


**Assignment-Specific Instructions**

- When material properties are not provided in the question, use the table of material properties in Appendix A of the course notes if needed.
- Details about factors of safety can be found in Lecture 8 of the course notes.
- Although all of the information you need to solve Question 4 should be in the question, additional information about thermal strains can be found in Lecture 6 of the course notes.

1. A lift is used to lower miners 5500 m into a mine. The lift is supported by a cable made of many high strength steel strands of 6 mm diameter each and was designed with a factor of safety of 2.00; the ultimate stress for the steel strands is 1300 MPa and the maximum allowable stress is 650 MPa. The empty lift weighs 16 kN and has a capacity of 20 persons. Assume that the density of steel is  $77 \text{ kN/m}^3$  and average weight of one person is 850 N.

- Calculate the number of strands required to safely support the lift.
- What is the maximum depth to which the lift can be lowered before the cable snaps?

2. The undeformed lengths of the system of cables and blocks are given below. What is the total length of AB including the deformation due to the load? Assume that the blocks are rigid and that the cables are weightless. The Young's Modulus of the cables is 200,000 MPa. Calculate the total energy stored in the three cables assuming that they remain linear elastic. Note that all measurements provided are in mm unless otherwise noted and  $\varnothing$  denotes a diameter measurement (i.e.  $\varnothing 4.0 \text{ mm} = 4.0 \text{ mm}$  diameter).

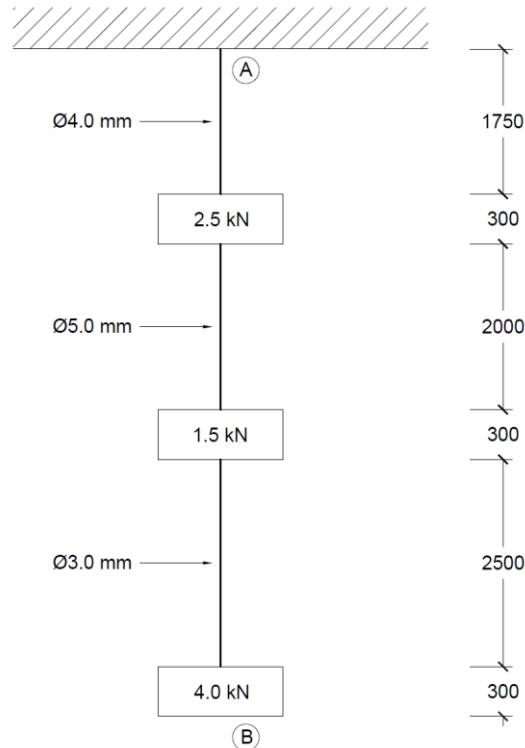

3. The longest bridge span in the world is the main span of the Akashi Kaikyo bridge in Japan, completed in 1998. The central span of this suspension bridge is 1991 metres long (a half hour walk), and the deck is 36 m wide. If the total load which the deck must carry is 27.5 kPa, design the main cables of this bridge. The drupe of the main cables between the towers and the centre of the bridge is 201.2 metres. The two main cables which support the deck are to be made of a collection of small wires 5.23 mm in diameter with a rupture stress of 1770 MPa. Calculate the number of wires needed in each cable if the maximum allowable stress is 805 MPa (corresponding to a factor of safety of 2.20).



**4a.** Consider the following block of concrete shown in Figure 1a which is rigidly attached to a wall on its left side only. The block is pulled with an axial force  $P = 1200$  kN which causes tensile stresses to develop in the member. At the same time, the ambient temperature increases by  $\Delta T = +15^\circ\text{C}$ .

- Calculate the stress in the concrete,  $\sigma_P$  and the strain,  $\epsilon_\sigma$ , caused by the force  $P$ .
- Calculate the thermal strain,  $\epsilon_{th}$ , caused by the increase in temperature,  $\Delta T$ . Recall that the thermal strains can be calculated as  $\epsilon_{th} = \alpha \Delta T$ . Does changing the temperature cause stresses to develop in this 1-dimensional example?
- What is the total change in length,  $\Delta l$ , and corresponding total strain  $\epsilon_{total} = \Delta l / l_o$ . Note that the total strain is the sum of the strains associated with stress and the thermal strains, or  $\epsilon_{total} = \epsilon_\sigma + \epsilon_{th}$ .

**4b.** Now consider the block of concrete shown in Fig. 1b which is rigidly attached to thick walls on both sides which prevent it from changing length. Explain why the member develops tensile stresses if the temperature is lowered, even though there is no applied load. Calculate how much colder it needs to get to cause the block to fail.

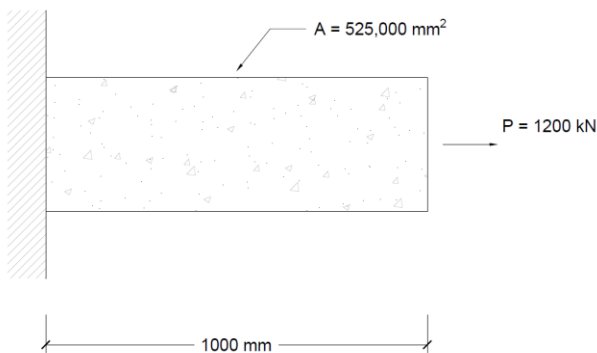


Fig. 1a – Unrestrained member for 4a

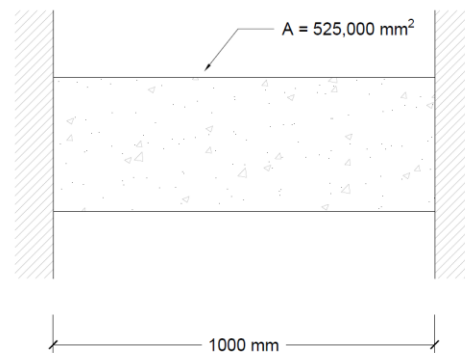


Fig. 1b – Restrained member for 4b

**5.** When performing structural analysis, we typically calculate the stresses in the structure assuming that the initial geometry of the structure does not change due to the applied loads. This is usually a reasonable assumption because these deformations are typically small. However, sometimes these deflections are large and need to be considered as they modify how the load is carried – these are called **second-order effects**.

Complete the following questions if the steel wire ABC has a diameter of 3 mm and an ultimate strength of 1500 MPa. The geometry shown in the figure is the initial geometry of the wire system. Points A and C are fixed in place and do not move.

- Calculate the forces and stresses in the wires AB and BC. How much longer does each wire become due to the applied load? How far does the 2000 N load move downwards? What is the factor of safety of this structure?
- Because the wires have gotten longer, the geometry of the system has changed, which has caused the tension in the wires to change as well. Re-calculate the forces and stresses in wires AB and BC using the deformed lengths of AB and BC you calculated in part a to define the system's geometry. Has the factor of safety increased or decreased?
- Using the stresses calculated in part b, calculate the length of wires AB and BC caused by carrying the 2000 N load. Are these values consistent with the lengths used to compute the stresses? Based on your answer, estimate how much the 2000 N load has moved downwards.
- Comment on the differences between an analysis using the initial geometry only and an analysis which includes second-order effects. Can you think of an example where neglecting second-order effects may be dangerous?

