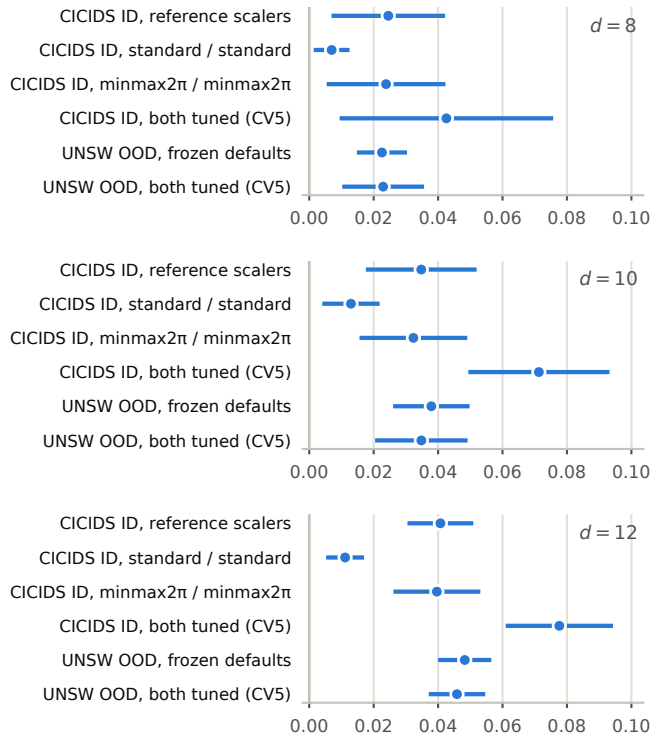


(a) Null-calibrated detection rate, $\alpha = 0.05$ per sensor

Clean evaluation draws (false alarm)	0.12	0.20	0.05	0.26	n/a
Feature sign flip 0.02	0.12	0.19	0.00	0.20	0.79
Feature sign flip 0.05	0.53	0.64	0.00	0.64	0.87
Feature sign flip 0.10	0.76	0.88	0.00	0.88	0.91
Feature-wise mean shift 0.02	1.00	1.00	0.00	1.00	0.36
Feature-wise mean shift 0.05	1.00	1.00	0.00	1.00	0.50
Feature-wise mean shift 0.10	1.00	1.00	0.00	1.00	0.62
Scaling drift 0.02	1.00	1.00	0.00	1.00	0.54
Scaling drift 0.05	1.00	1.00	0.00	1.00	0.61
Scaling drift 0.10	1.00	1.00	0.00	1.00	0.67
Feature dropout 0.02	0.00	0.00	0.00	0.00	0.49
Feature dropout 0.05	0.00	0.02	0.00	0.02	0.70
Feature dropout 0.10	0.00	0.06	0.00	0.06	0.76
Prior-preserving label flip 0.02	0.00	0.00	0.00	0.00	1.00
Prior-preserving label flip 0.05	0.00	0.00	0.00	0.00	1.00
Prior-preserving label flip 0.10	0.00	0.00	0.00	0.03	1.00
Random label flip 0.02	0.00	0.00	0.00	0.00	1.00
Random label flip 0.05	0.00	0.00	0.00	0.00	1.00
Random label flip 0.10	0.00	0.00	0.00	0.03	1.00
	I_X	I_{XF}	I_{Y_m}	I_{XFY} batch	I_{XFY} item

Regime fires if any sensor fires. Columns 1-4: batch-level, null-calibrated;
column 5: exact item-aligned (n/a on clean draws)

(b) ZZ – SVC conclusion impact, 95% t over 5 splits

Within-split difference in suite-average balanced-accuracy impact