
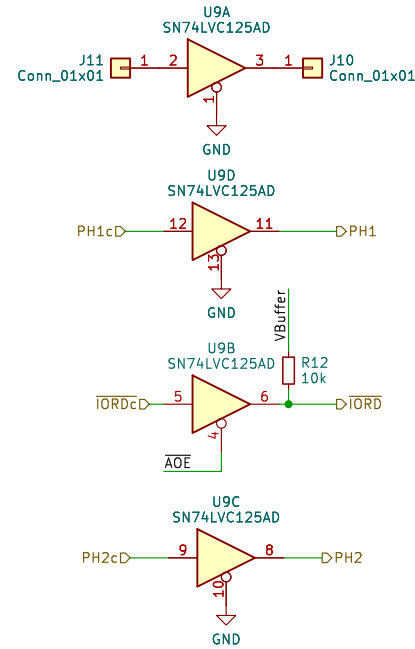

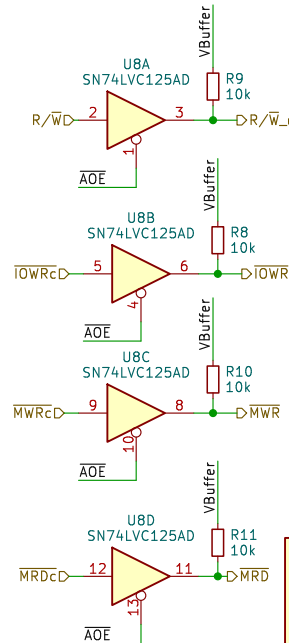


One can place a SN74LVC245ANSR for 3.3V BUS and CPU or a SN74ABT245BNSR for 5V BUS and CPU on the Pads from U5 or leave the SN74LVCC3245ANSR for 3.3V BUS and 5V CPU.

For Address Buffers use SN74LVC245ANSR for 3.3V BUS and SN74ABT245BNSR for 5V BUS.



Sheet: /Buffers/

File: buffers.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. kicad 7.0.11-7.0.11-ubuntu20.04.1

Rev:

Id: 3/4

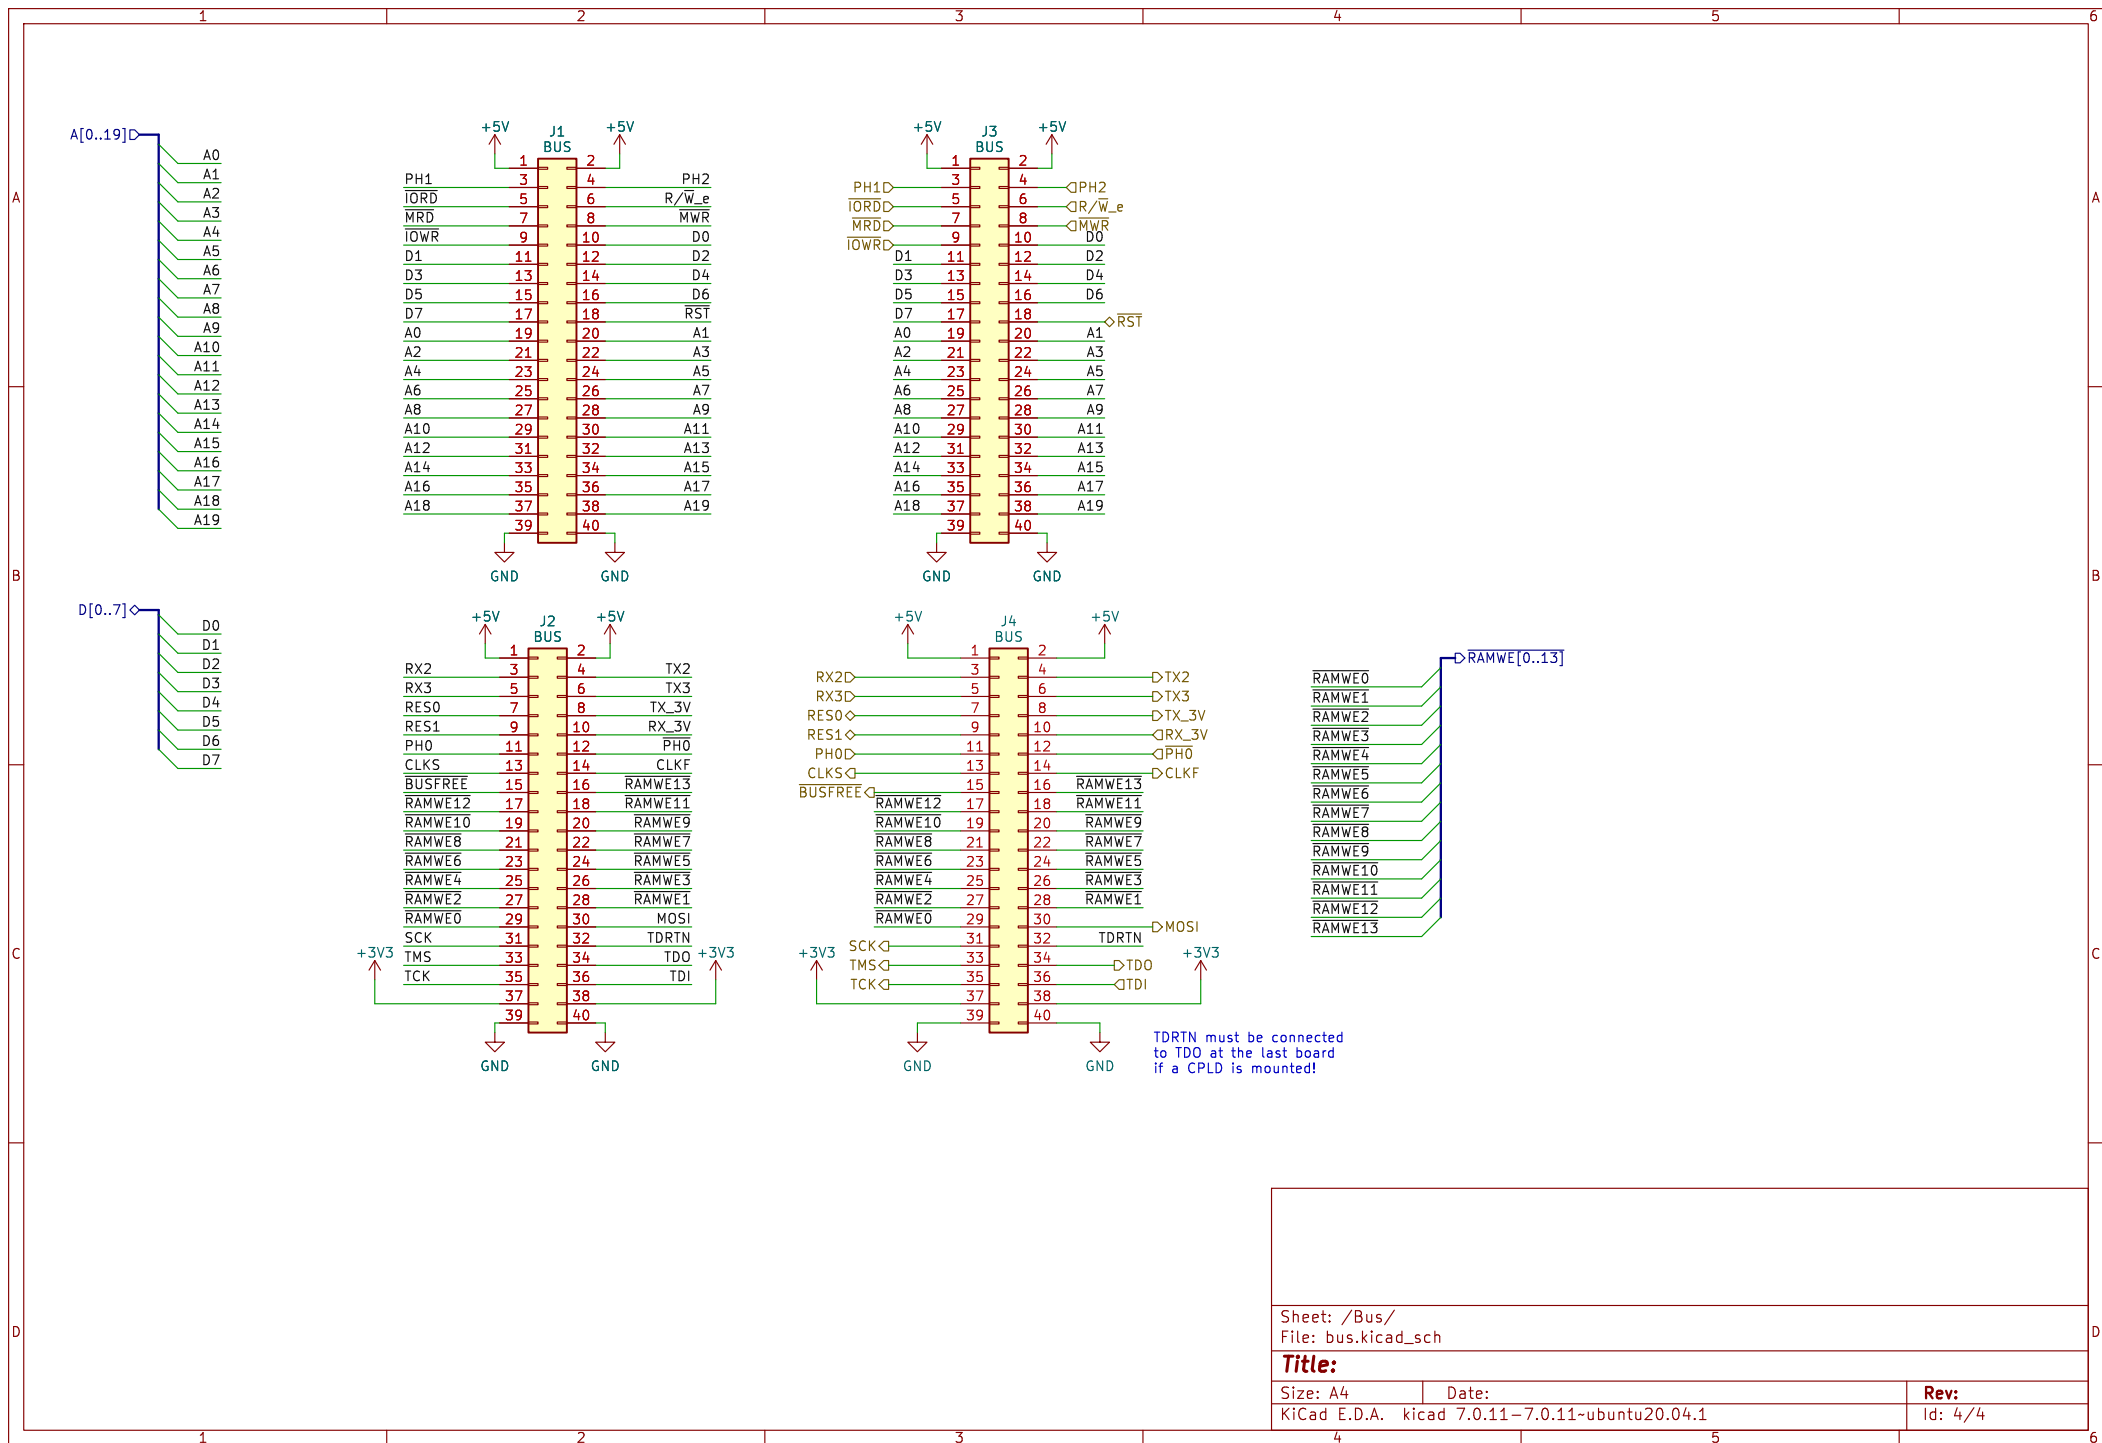

Sheet: /Bus/
File: bus.kicad_sch

Title:

Size: A4
KiCad E.D.A. kicad 7.0.11-7.0.11-ubuntu20.04.1

Date:
Rev:
Id: 4/4