


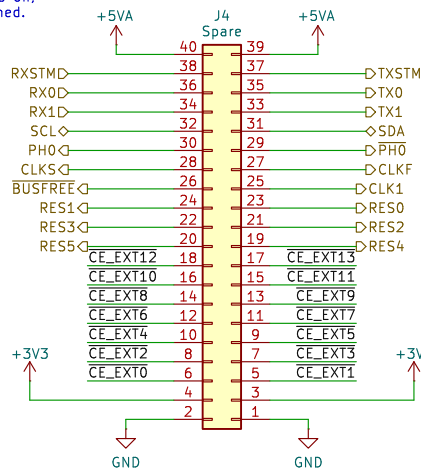


5VA is always on,
5V is switched.

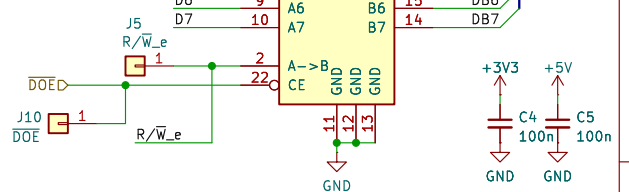

Use 74LVC245ADW for 3V3 only,
and 74HCT640M or LV1640D
for inverting.

The difference between the
SN74LVCC4245ANSR and the
SN74LVCC3245BNSR is the switched
5V and 3V3 Rails.



v1.0: Initial
100% Offner

Sheet: /Bus/
File: bus.kicad_sch

Title: Unicomp v3 – Bus

Size: A4 | Date: 2024-10-01

KiCad E.D.A. 8.0.7

Rev: v1.0

Id: 4/2