
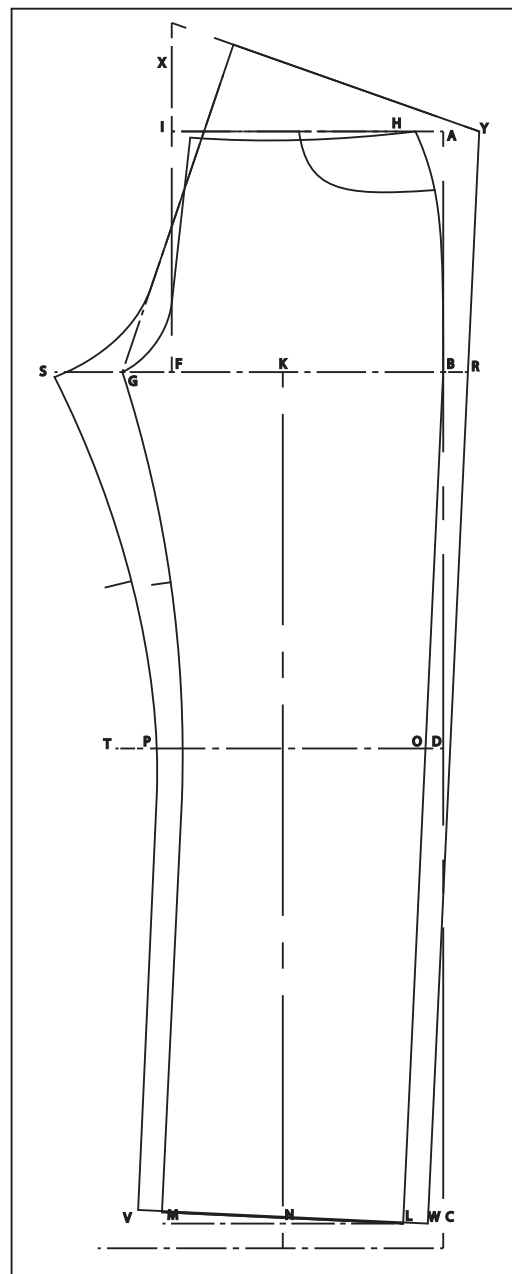


Drafting Selvedge Denim Jeans

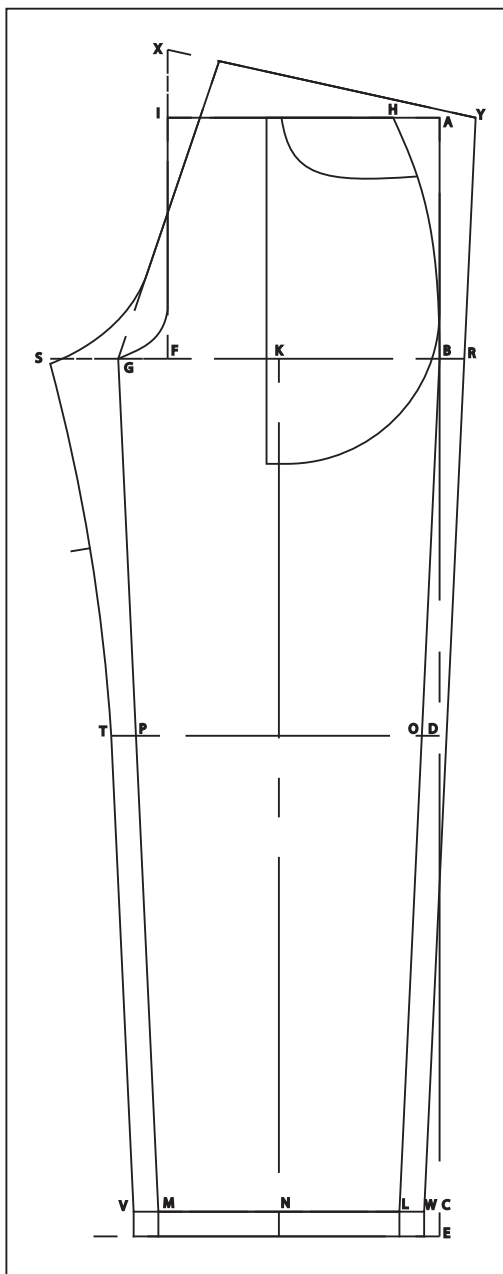

Drafting Selvedge Denim Jeans

Copyright J.E.Landis

For personal use only do not reproduce

2024

Open Selvedge Jeans Calculator in google Sheets

MAKE A SAFETY COPY OF THIS FILE IN CASE YOU ACCIDENTALLY CHANGE SOMETHING!!!

	INPUT	1/2	1/4	1/8
waist	34.5	17.25	8.625	4.3125
seat	44	22	11	5.5
rise	9.75	4.875	2.4375	1.21875
knee	10.375	5.1875	2.59375	1.296875
bottom	9.75	4.875	2.4375	1.21875
length	34	17	8.5	4.25
FORE PART	OUTPUT		BACK PART	OUTPUT
A-E	45.25			
A-B	9.75		B-R	1
B-C	34.5		G-S	2.75
C-E	1		P-T	1
B-D	15.25		O-U	1
B-F	11		M-V	1
F-G	2		L-W	1
I-H	9.125		I-X	2.75
G-K	6.5		Y-Z	10.625
N-M	4.875			
N-L	4.875			
			FOR UPDATED DRAFT	
			F-AA	2.75
finished waist	18		i-x for 501	4.4

Input Type your desired dimensions in the boxes marked in red.

Output The results of the calculations will appear in the boxes marked in blue.

Dimensions for most sizes are provided in the chart below the calculator. Feel free to play around with the dimensions to suit your needs.

WAIST	DRAFT WAIST	SEAT	RISE	BOTTOM	INSEAM	KNEE
25	23.5	33	7			NOT
26	24.5	34	7.25			USED
27	25.5	35	7.5			IN DRAFT
28	26.5	36	7.75	8.25	31.5	8.875
29	27.5	37	8	8.375	31.5	9
30	28.5	38	8.25	8.5	33	9.125
31	29.5	39	8.5	8.75	33.5	9.375
32	30.5	40	8.75	9	33.5	9.625
33	31.5	41	9	9.125	33.5	9.75
34	32.5	42	9.25	9.375	33.5	10
35	33.5	43	9.5	9.5	34	10.125
36	34.5	44	9.75	9.75	34	10.375
38	36.5	45	10.25	9.875	36	10.5
40	38.5	46	10.5	10	36	10.625
42	40.5	47	10.75			
44	42.5	48	11			
46	44.5	49	11.25			
48	46.5	50	11.5			
50	48.5	51	11.75			
52	50.5	52	12			
54	52.5	53	12.25			


Waist is the desired finished size, draft waist is the measurement to be used in the calculator.

The dimensions of the finished garment may vary depending on type of fabric used, shrinkage, sewing technique, etc. It's better to size up a little bit if you're worried about sizing.

The first set of instructions is a basic draft for jeans as they would have been drawn at the beginning of the 20th century. The second section contains instructions building off of the original draft but will provide a more modern silhouette.

The seam allowances are included in the draft unless stated otherwise. Seam allowance is 3/8" everywhere except the center back seat seam and yoke seam which are 5/8". This is to accommodate a felled seam but is not required. A seam allowance diagram is included at the end of this document.


Basic Draft

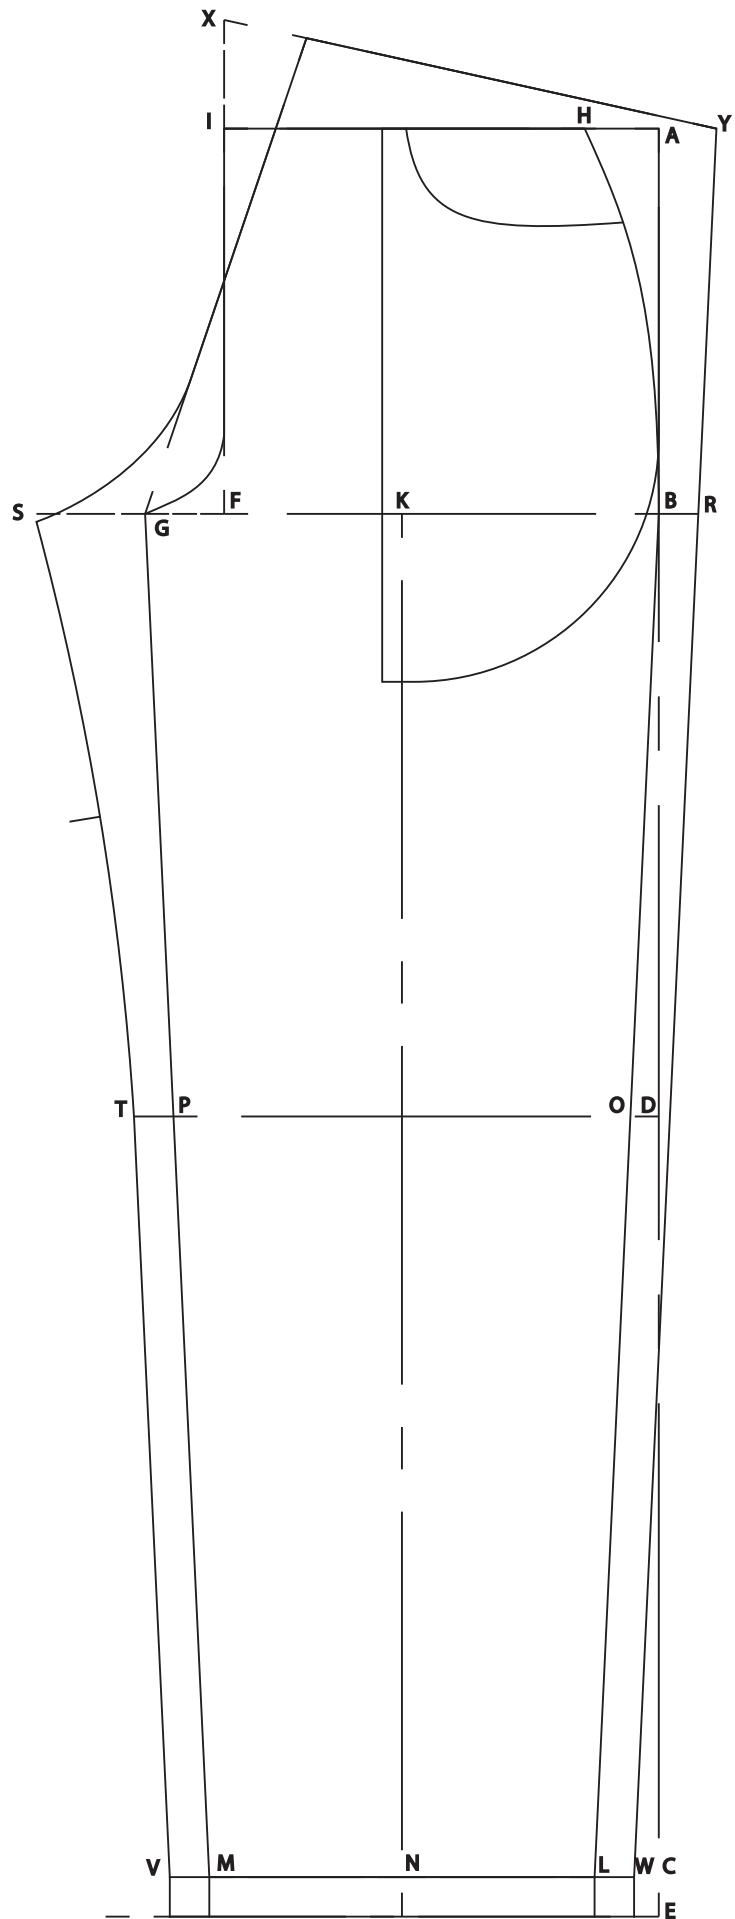

Drafting front part

(Page one)


1. Draw line A-E and square from A-I. A-I is not a specific distance at this time but 12 inches should be plenty
2. Measure rise from A-B square out
3. Measure inseam from B-C square out
4. Measure 1 inch hem from C-E square out
5. Measure knee from B-D Square out



Drafting front part


(Page two)

6. Measure seat from B-F, and 2 inches from F-G
7. Square up from F to create point I
8. Measure $\frac{1}{4}$ waist from I-H
9. K is half way between B-G, square down to N

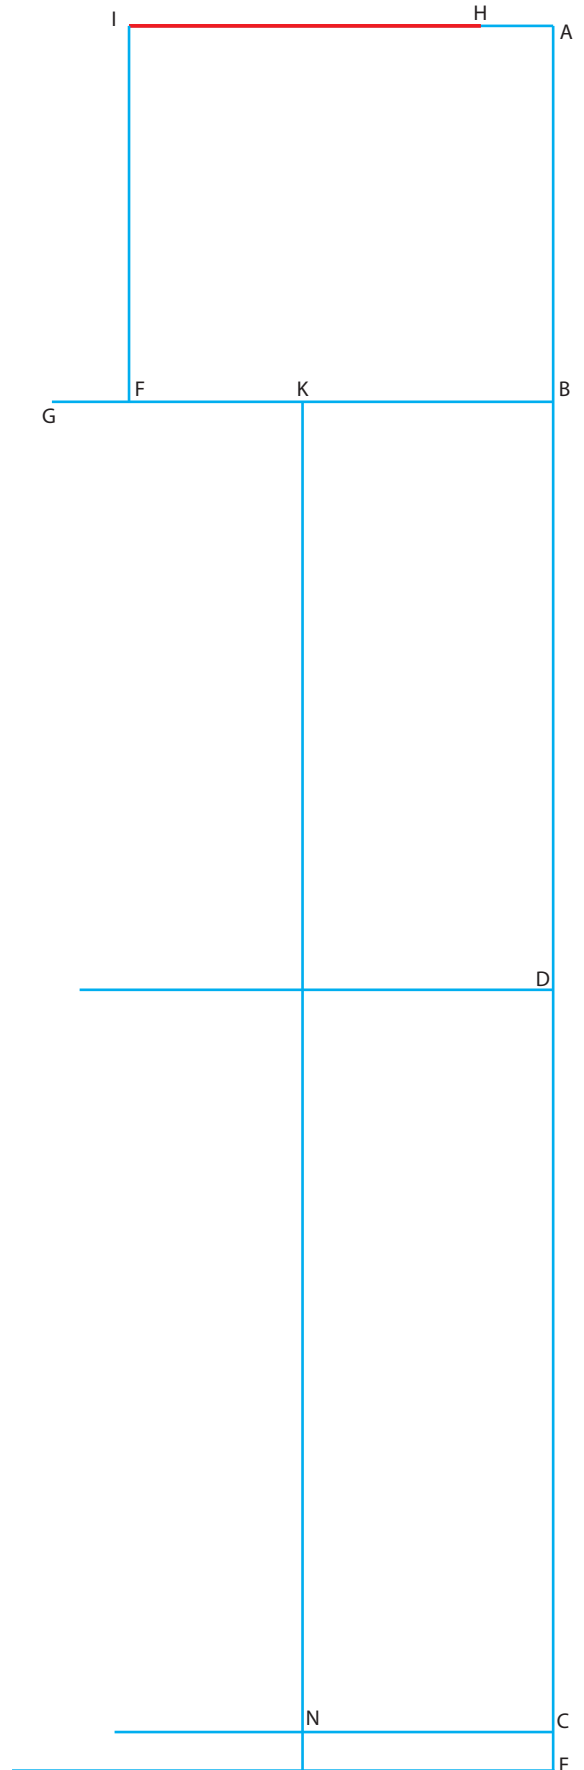

(Page three)


10. N-M and N-L are $\frac{1}{2}$ hem width
11. Draw line B-L, creating point O
12. Draw line G-M, creating point P

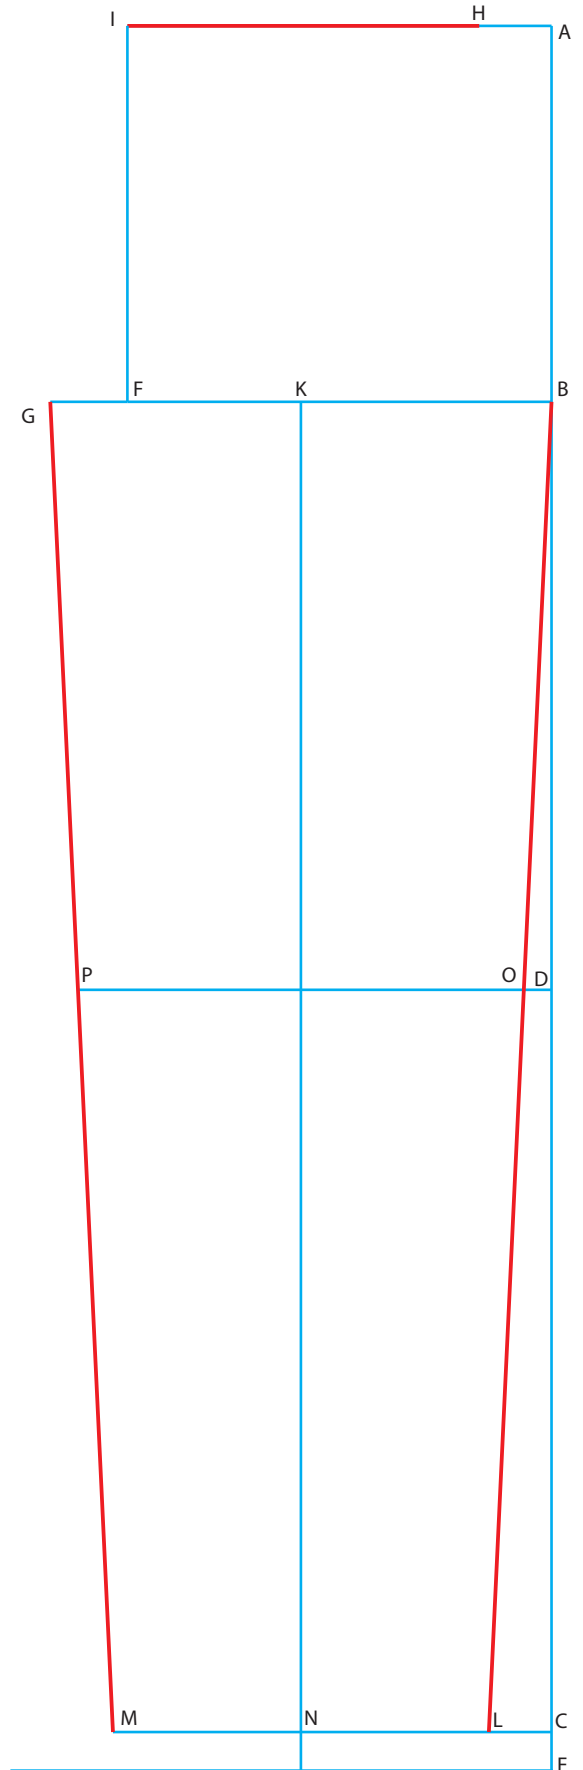

Drafting front part

(Page four)


13. Finish fly G-F-I as shown in diagram
(you can adjust curve to your liking)
14. Finish hip B-H as shown in diagram
(you can adjust curve to your liking)
15. This completes the front draft. Trace
off a copy and set aside.

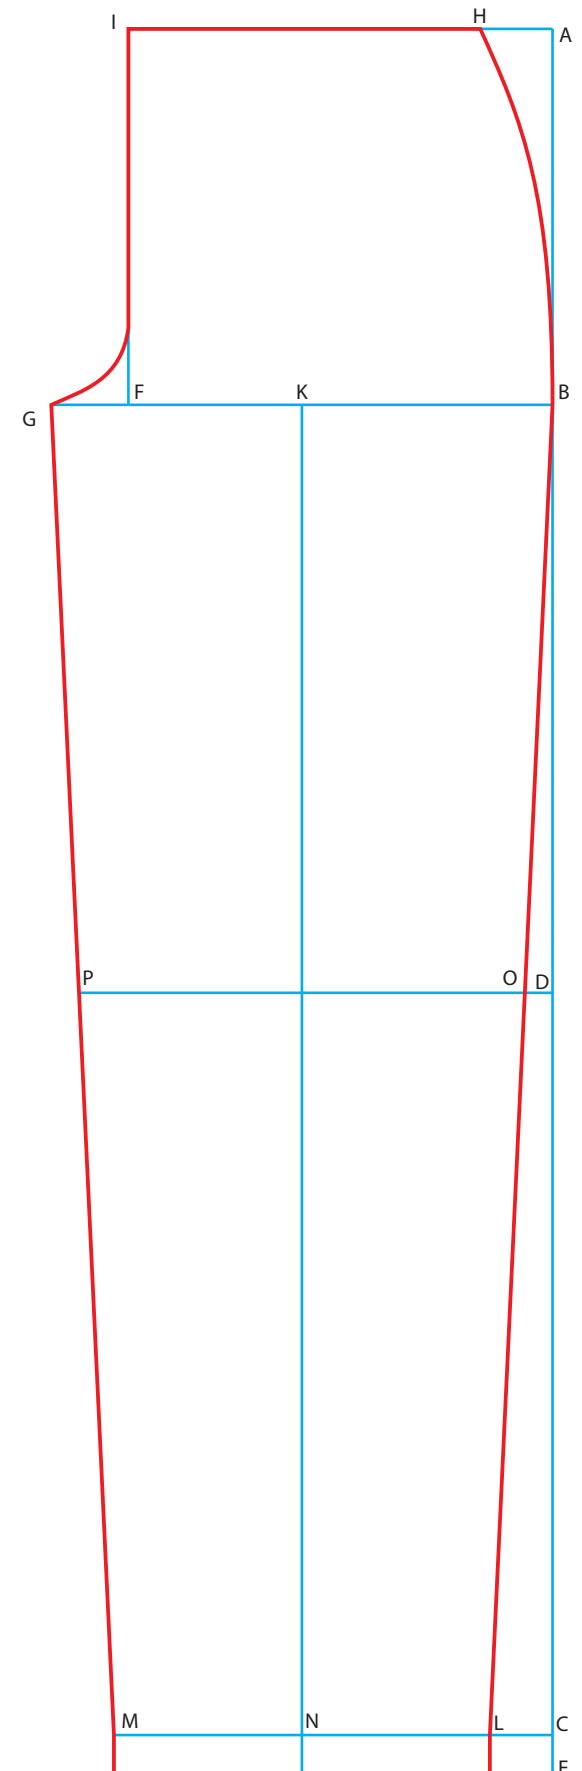

Drafting back part

(Page one)


1. B-R, O-U, P-T, M-V, L-W are all 1 inch
2. Measure from G-S

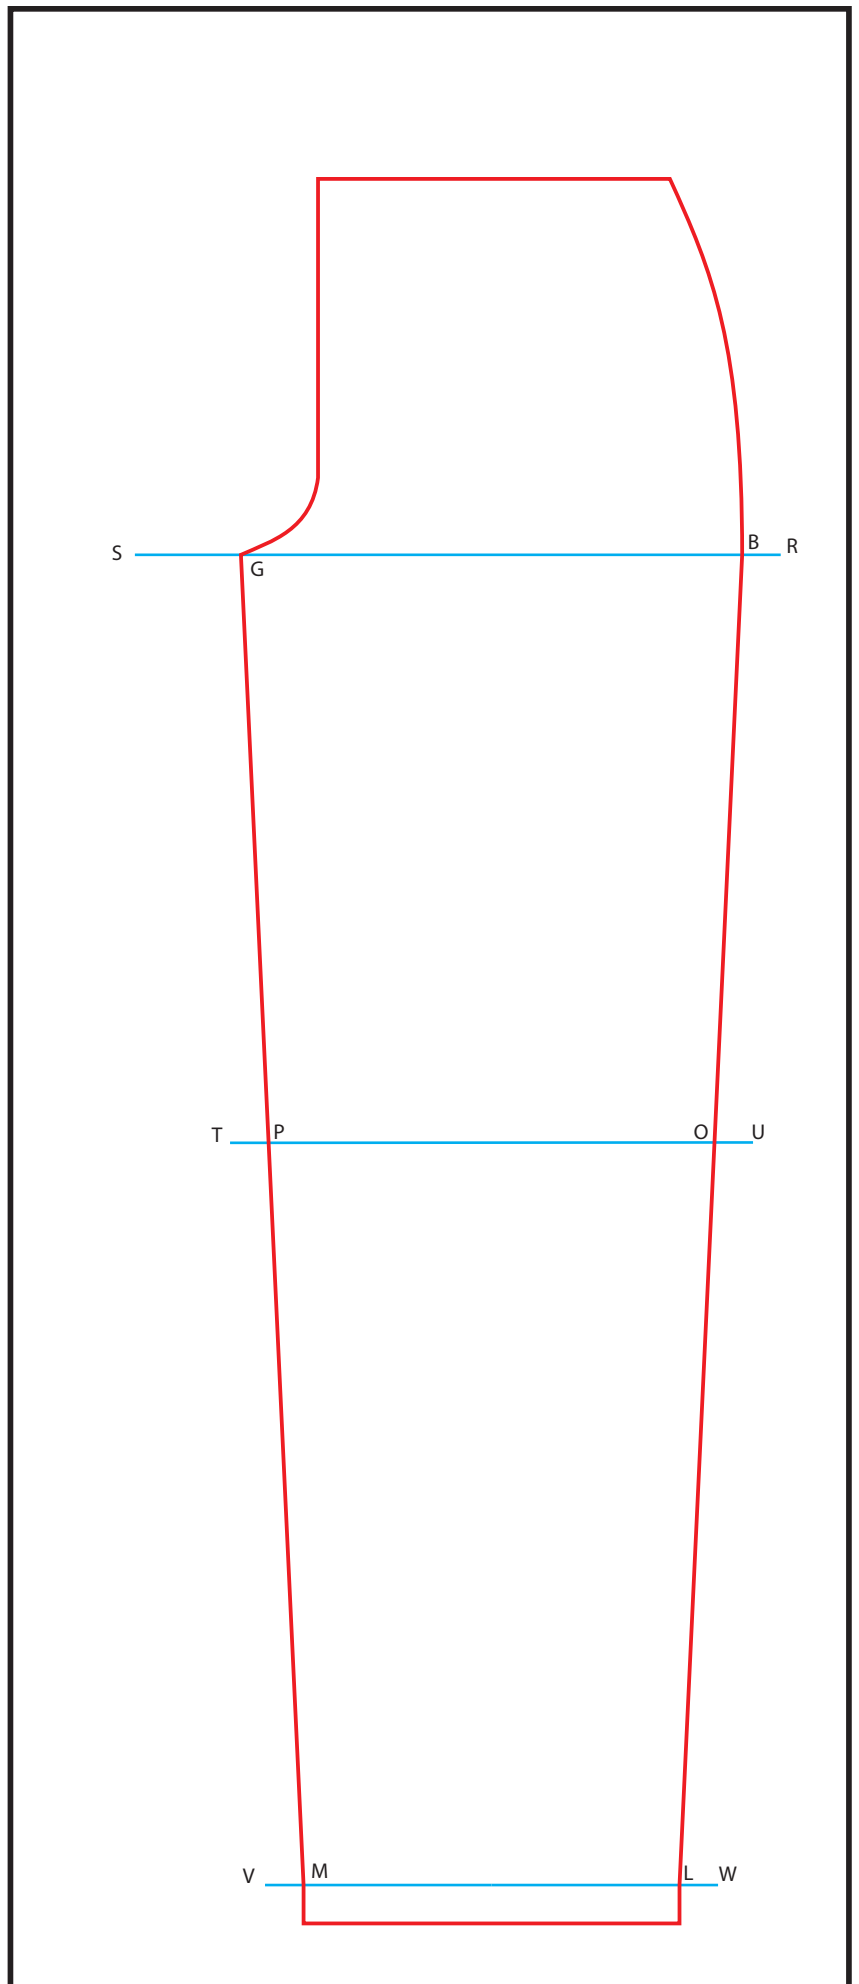

Drafting back part

(Page two)


3. Draw out seam W-U-R and extend to create point Y on the waist line
4. Draw inseam V-T, and T-S

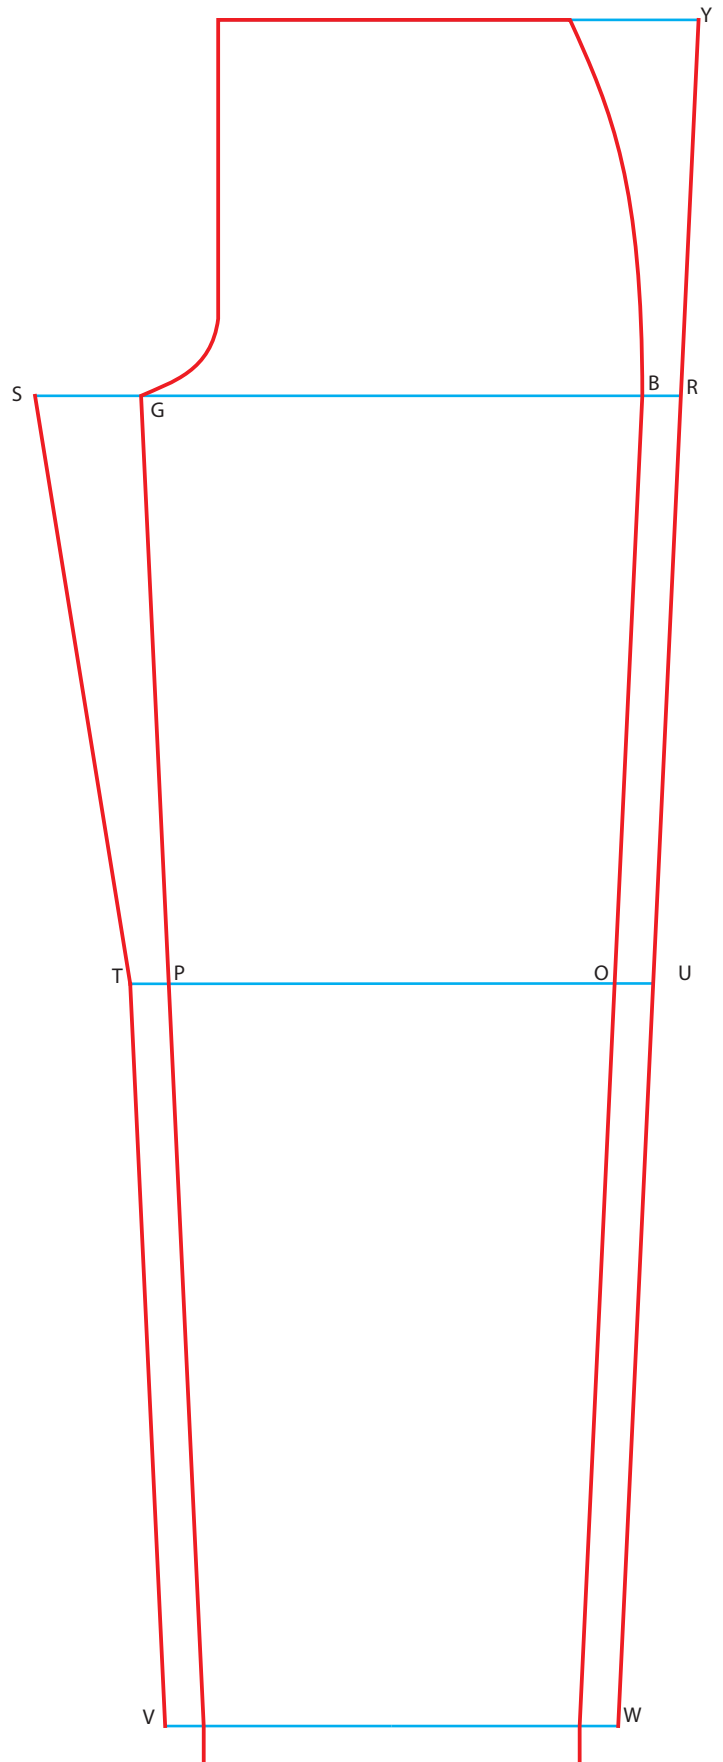

Drafting back part


(Page four)

8. Shape seat seam S-Z as shown in diagram (you can adjust curve to your liking)
9. Add hem at V and W to match front

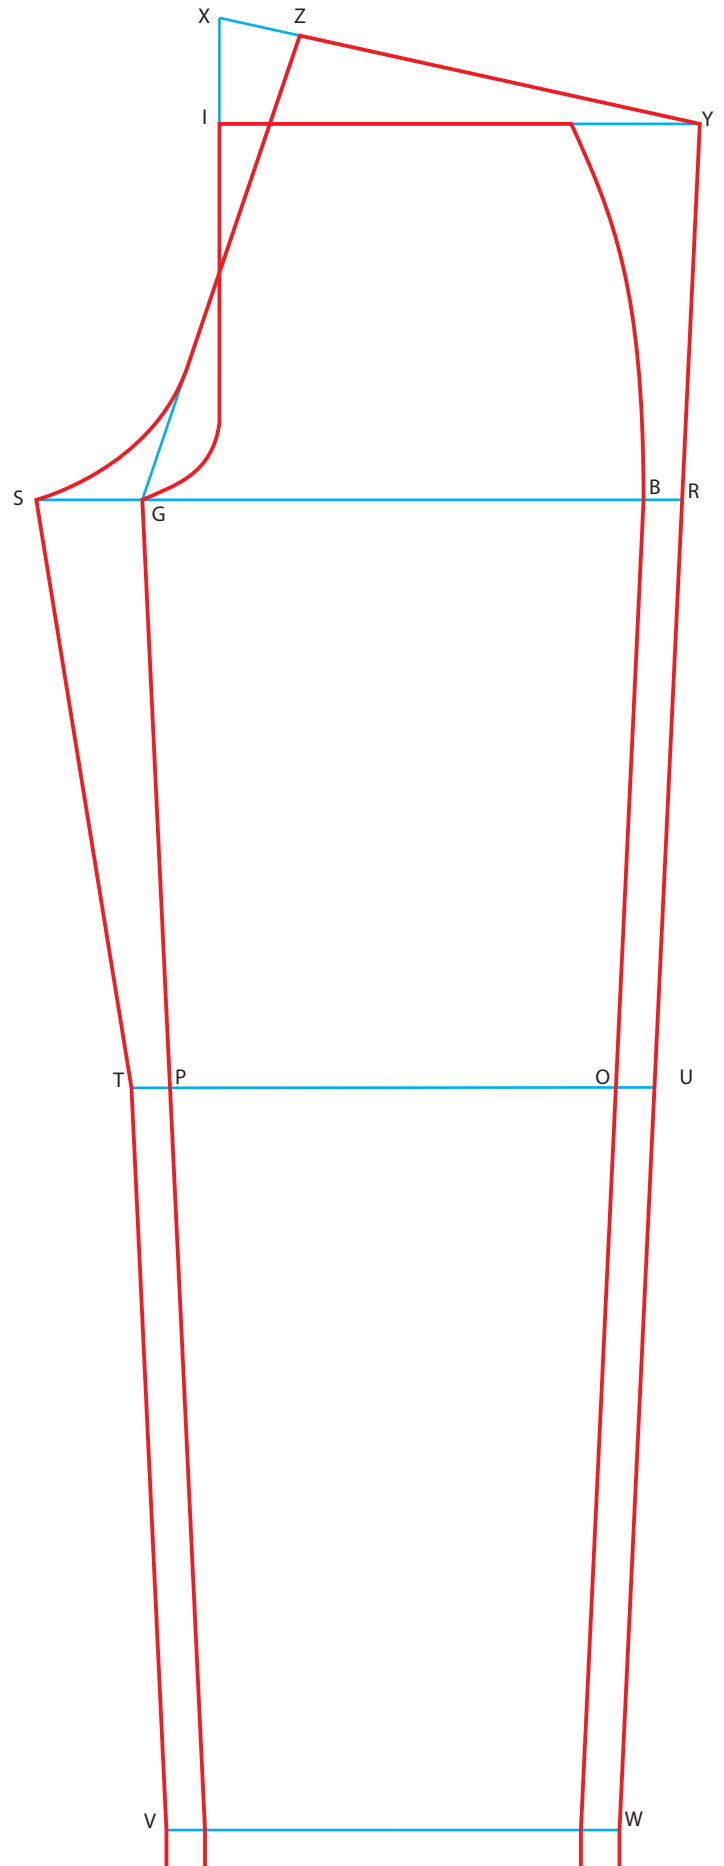


(Page five)

-
- Technical drawing of a tapered shaft with a fillet. The drawing includes the following elements:
- Top View:** A horizontal blue line representing the top edge of the shaft. It features a fillet (curved transition) on the left side. The fillet is defined by a red curve and a blue construction line. The distance from the left edge to the start of the fillet is dimensioned as $1/8''$. The fillet is labeled **S** at its start and **G** at its end.
 - Side View:** A vertical blue line representing the side edge of the shaft. It features a fillet (curved transition) on the left side. The fillet is defined by a red curve and a blue construction line. The fillet is labeled **1** at its start and **T** at its end.
 - Center Line:** A vertical blue line passing through the center of the shaft, labeled **Center** at its top end.
 - Dimensions:**
 - $1/8''$: Dimension from the left edge to the start of the fillet in the top view.
 - $3/8''$: Dimension from the center line to the start of the fillet in the side view.
 - Labels:**
 - S**: Label for the start of the fillet in the top view.
 - G**: Label for the end of the fillet in the top view.
 - 1**: Label for the start of the fillet in the side view.
 - T**: Label for the end of the fillet in the side view.
 - P**: Label for the end of the shaft in the side view.
 - Center**: Label for the center line in the side view.

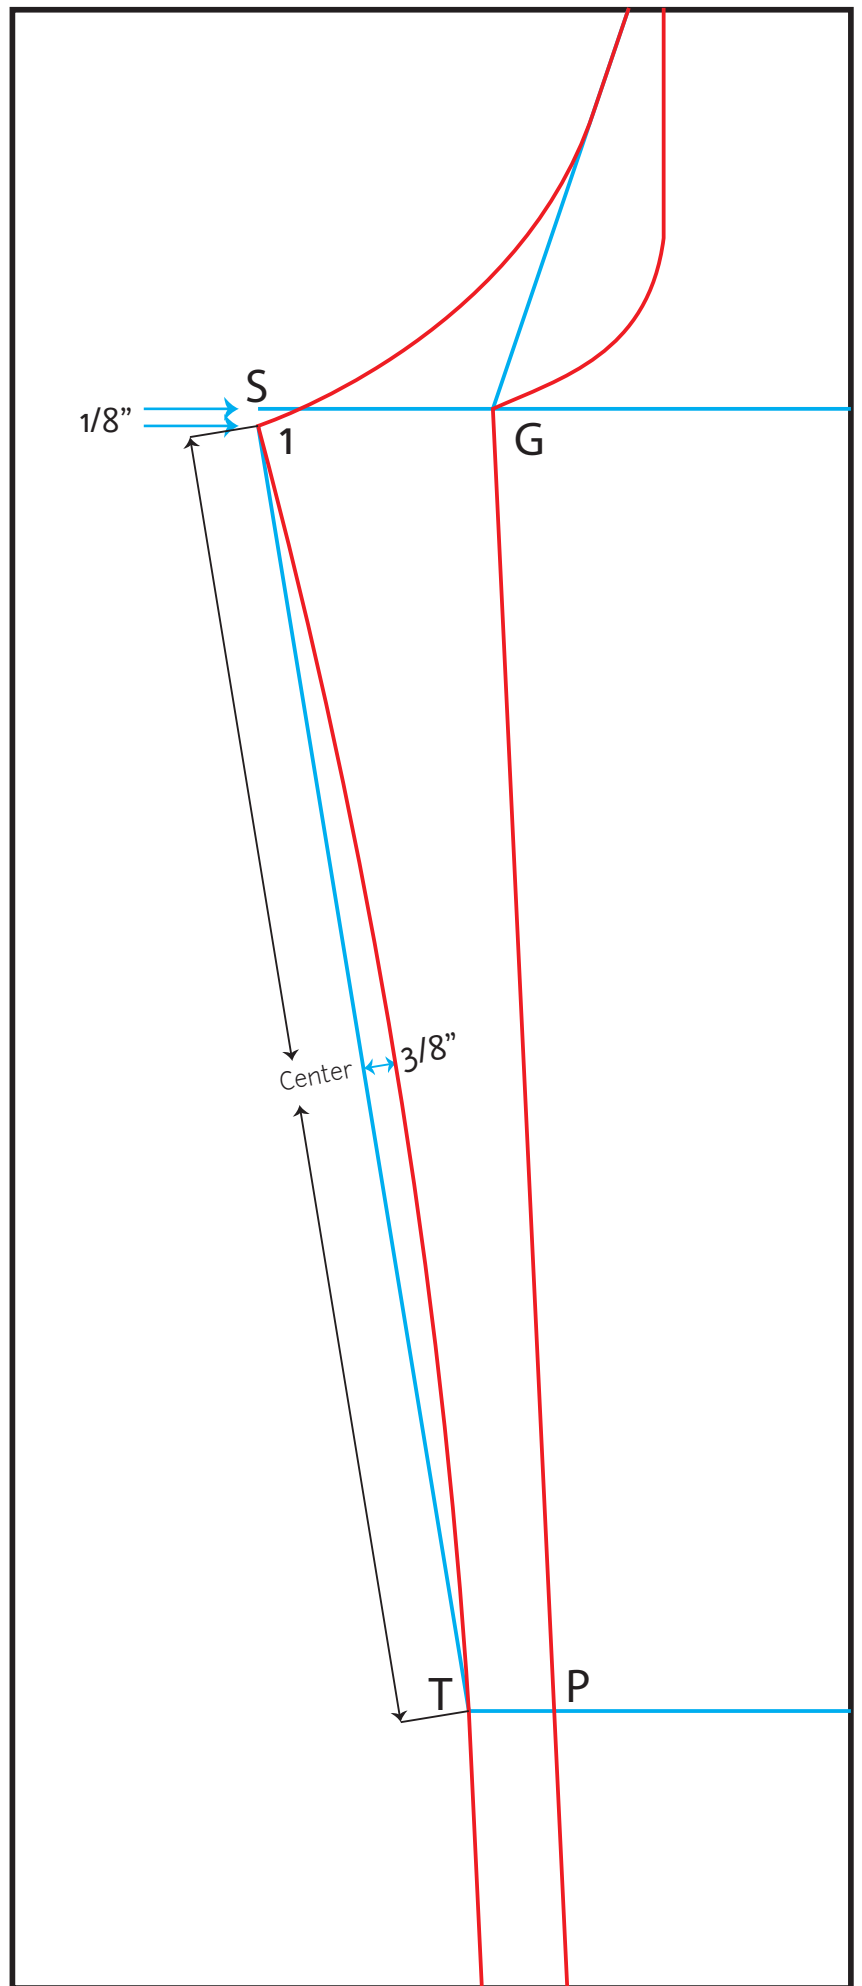



Drafting the Waistband and Belt loops

Waistband is typically 1-1/2" when finished but can be any size you would like. 1-3/8 inch must be added to the waist measurement to account for the button stand of the fly, as well as 3/8" seam allowance on all sides. It's best to leave a few extra inches of length in case there is some discrepancy in your final garments waist measurement.

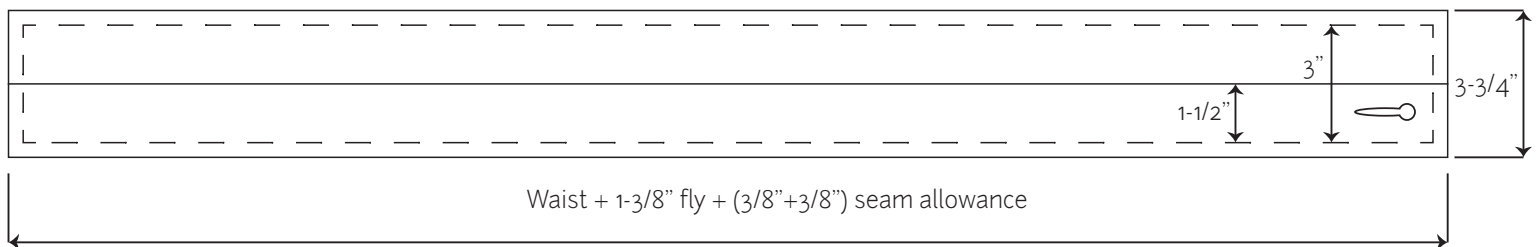


Belt loops can be any width you would like, the equipment you have available and personal taste will determine your method of construction.



This is a typical belt loop found on most commercially produced jeans and is sewn using a 1/4" wide coverstitch machine. A belt loop is typically 1/2 inch wide by 2 to 2-1/2 inches long when finished, but again can be what ever size suits your needs.

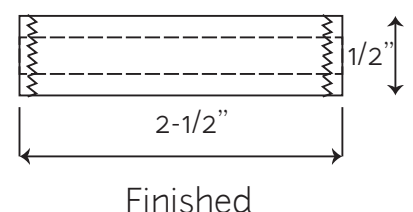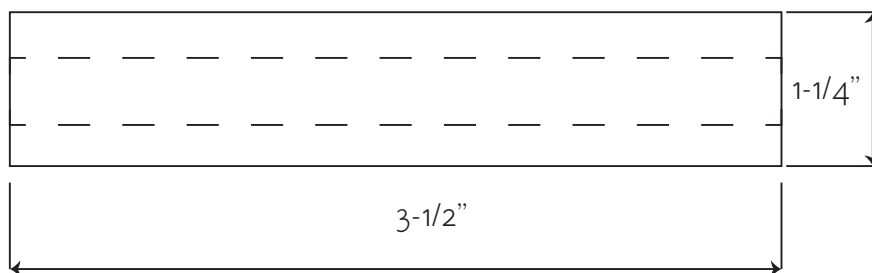


Drafting the Button Fly

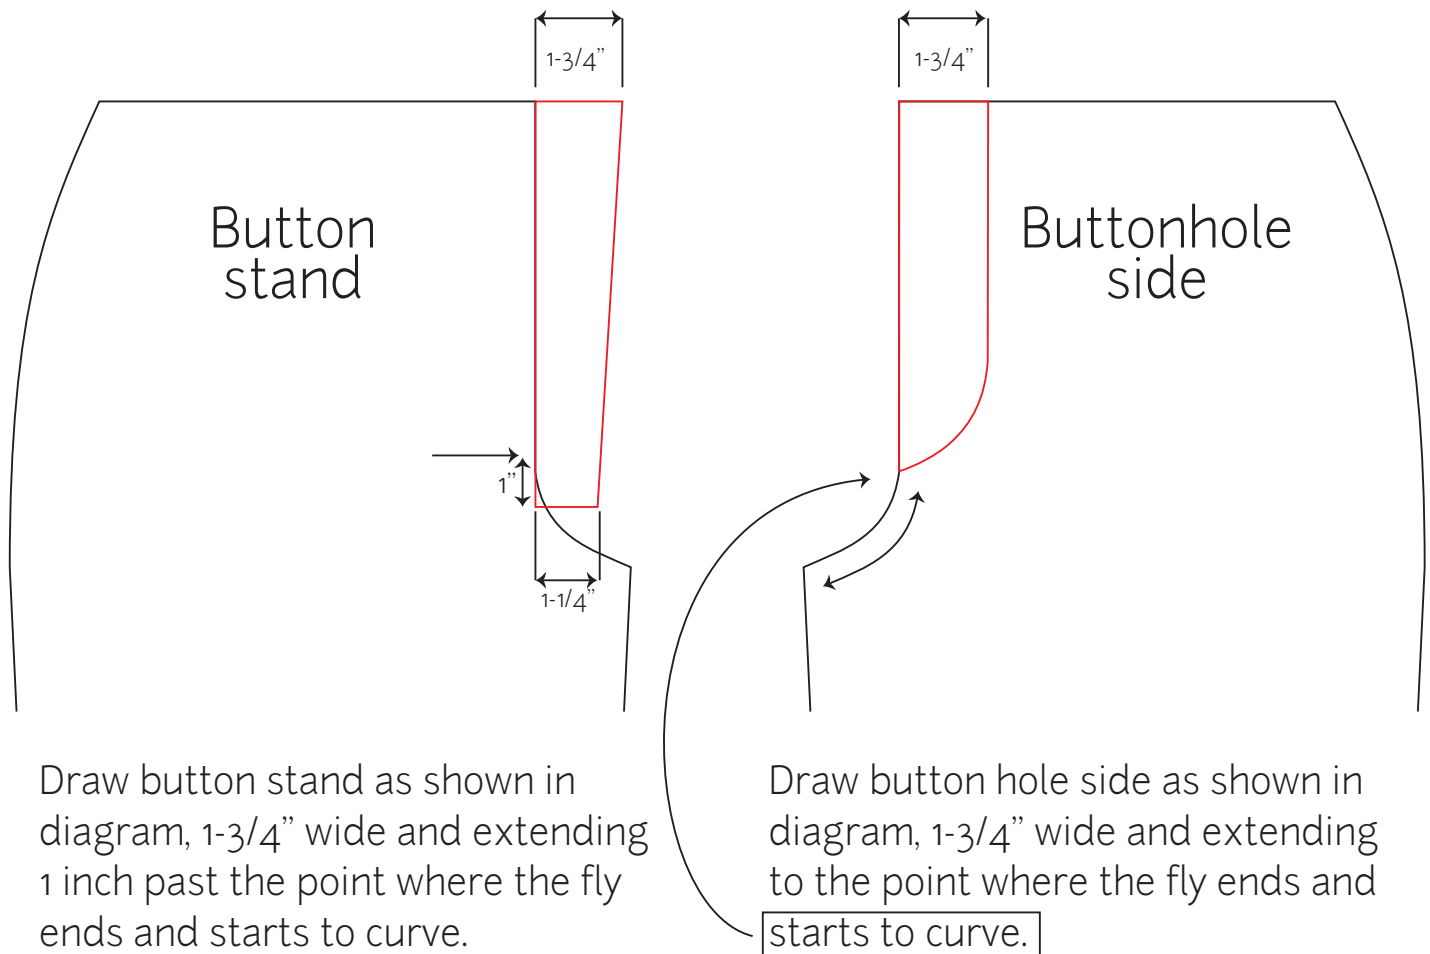

Finish as shown below. You have to mirror the pieces you created because they will be folded in half when sewing the jeans. Feel free to shape the fly pieces however you like and add as many or as few buttons as you want.

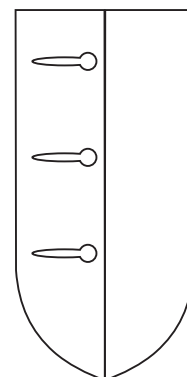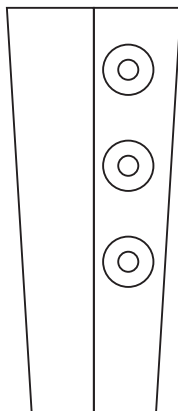


Drafting Front Pocket

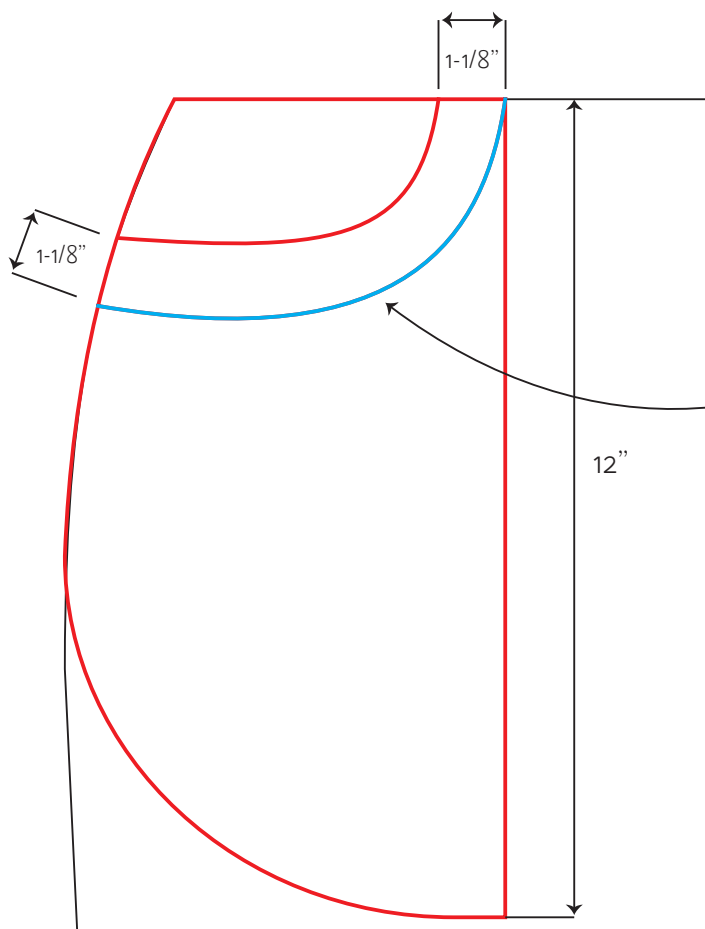


Measure 12 inches down from waist and shape pocket bag as shown in diagram above. This is a fairly deep pocket and can be sized and shaped to your liking.

Finish pocket bag as shown to the right. Pocket bag is one piece and folded down the center.

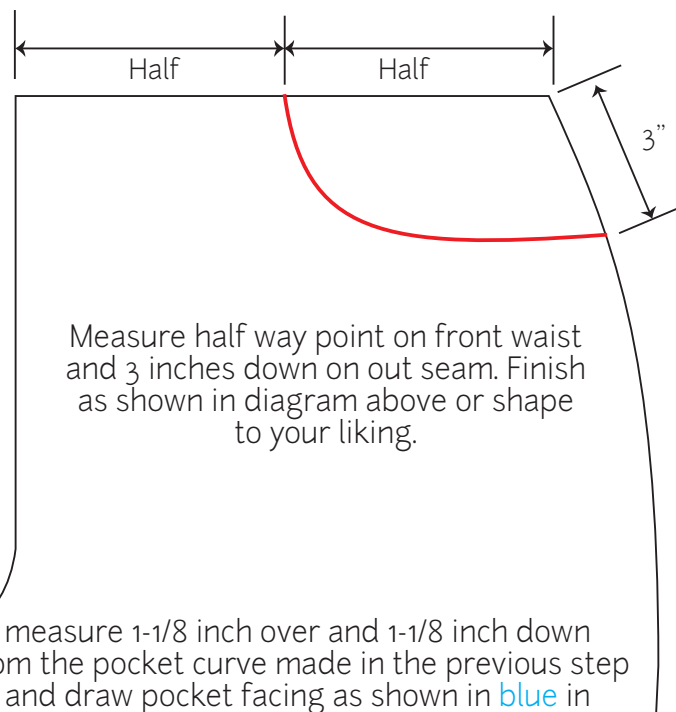


Measure half way point on front waist and 3 inches down on out seam. Finish as shown in diagram above or shape to your liking.

measure 1-1/8 inch over and 1-1/8 inch down from the pocket curve made in the previous step and draw pocket facing as shown in blue in the diagram to left.

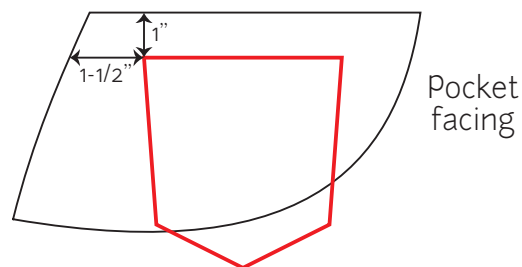

Measure 1 inch down and 1-1/2 inch over to place the coin pocket. Coin pocket can be any shape you like or left out completely.

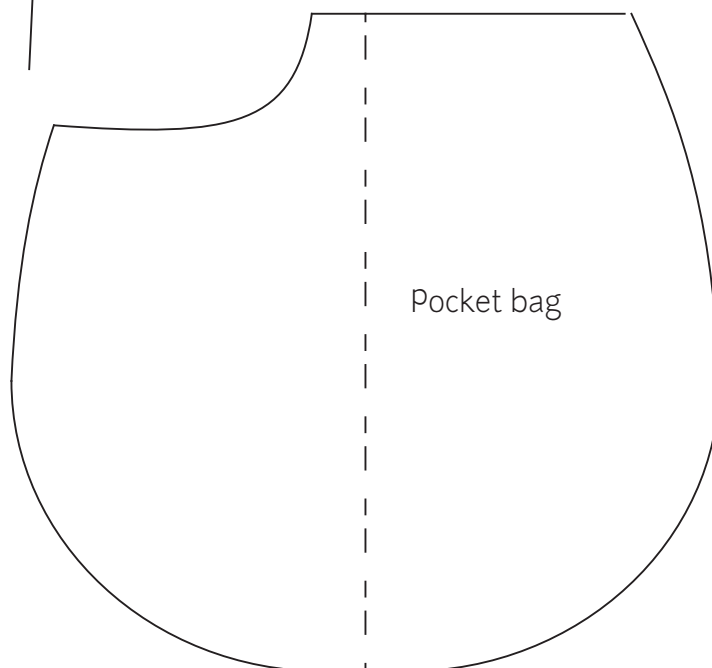


Drafting Yoke and Back Pocket


Shown in **red**.

Measure 1-1/2 inches down on the out seam and square out to center seam. You can make the yoke any size or shape you would like or exclude it completely.

The red line is the center line of the yoke and you will add 5/8 inch seam allowance shown in **blue** to both sides of this line after cutting.

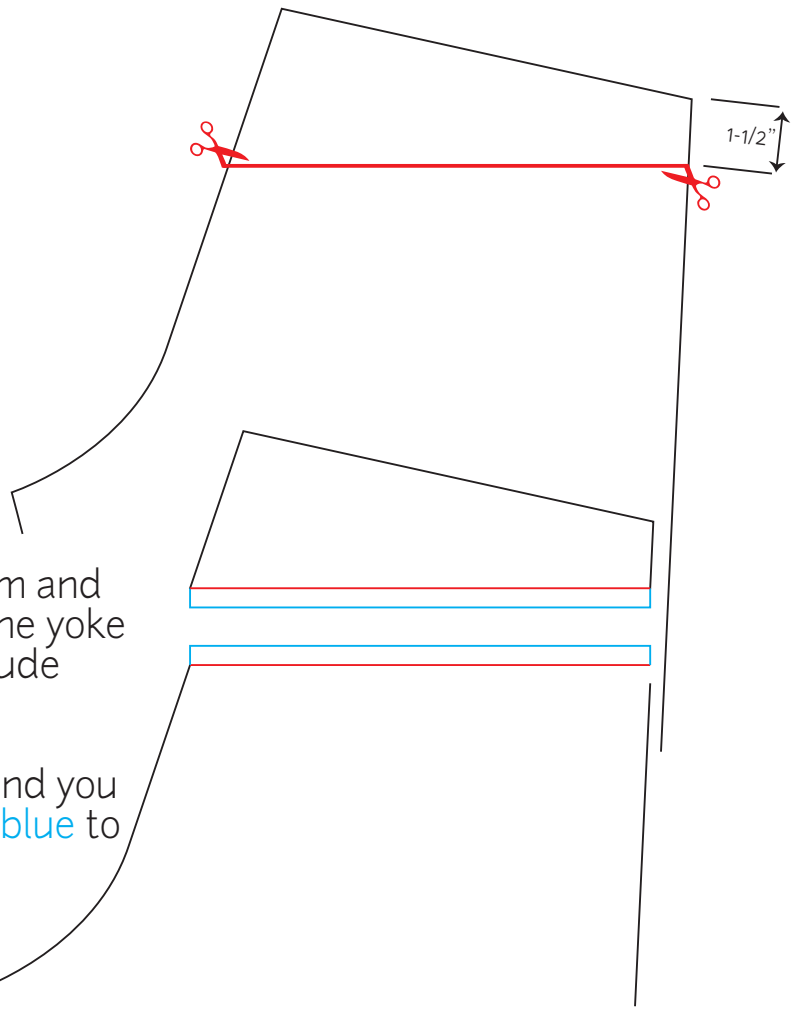

Back pocket should line up with your finished front pocket shown as dotted line. Pocket shape and placement can be styled however you like, this is just a basic shape and placement.

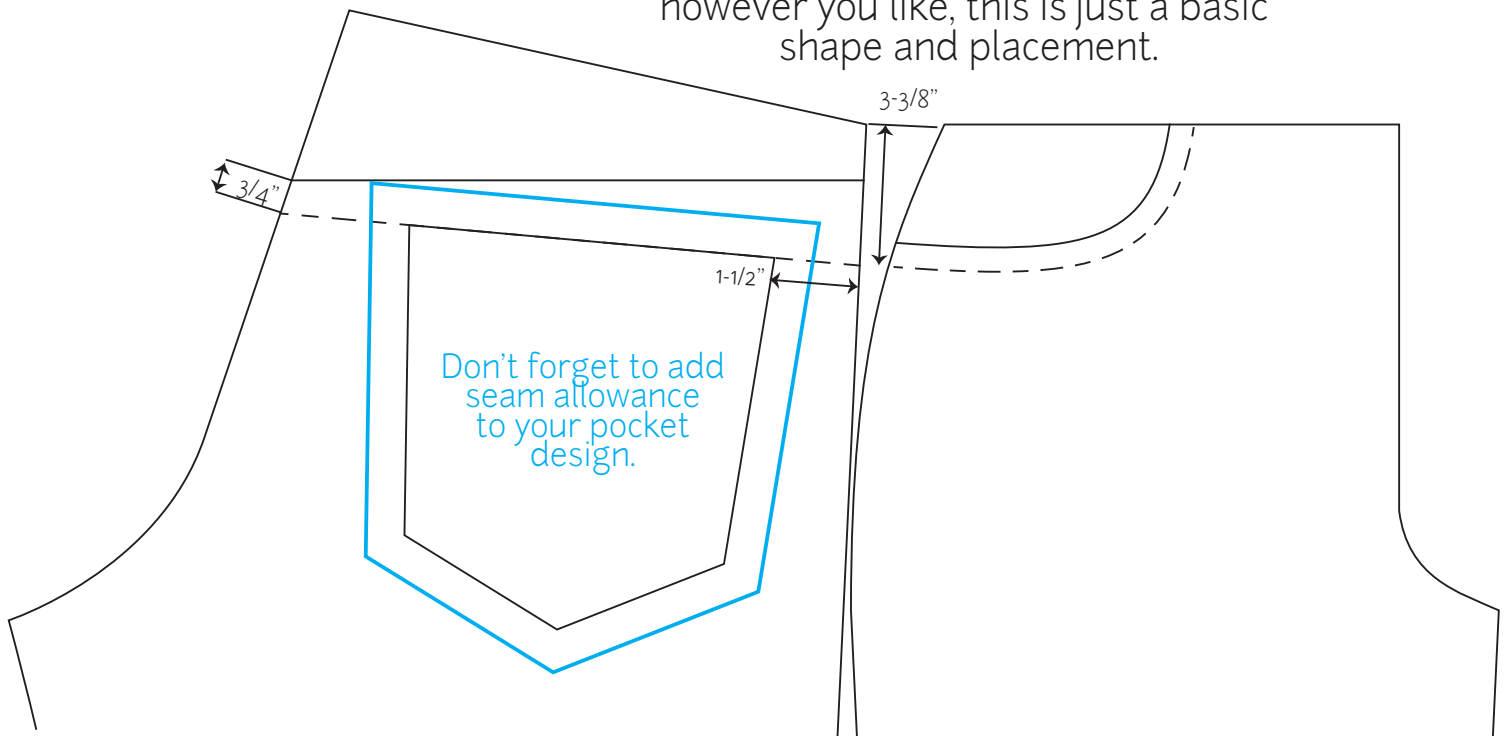


This technical drawing illustrates the pattern for a skirt, showing the front and back pieces with various construction lines and labeled points. The pattern is divided into several sections by horizontal and vertical lines. Key points labeled include X, I, H, A, Y, S, G, F, K, B, R, T, P, O, D, V, M, N, L, W, and C. The drawing shows the waistband, the main body of the skirt, and the hemline. The pattern is symmetrical, with the front piece on the left and the back piece on the right. The construction lines indicate the placement of the waistband, the main body, and the hemline. The labeled points are used to define the shape and size of the pattern pieces.

Updated draft

(Page one)


1. Updates for this draft are marked in red on the calculator. Start with the completed original draft. New construction lines are marked in green and new pattern lines are black.
2. I-X is redrawn according to the dimension in the calculator
3. Redraw line Y-Z to intersect with the new point X

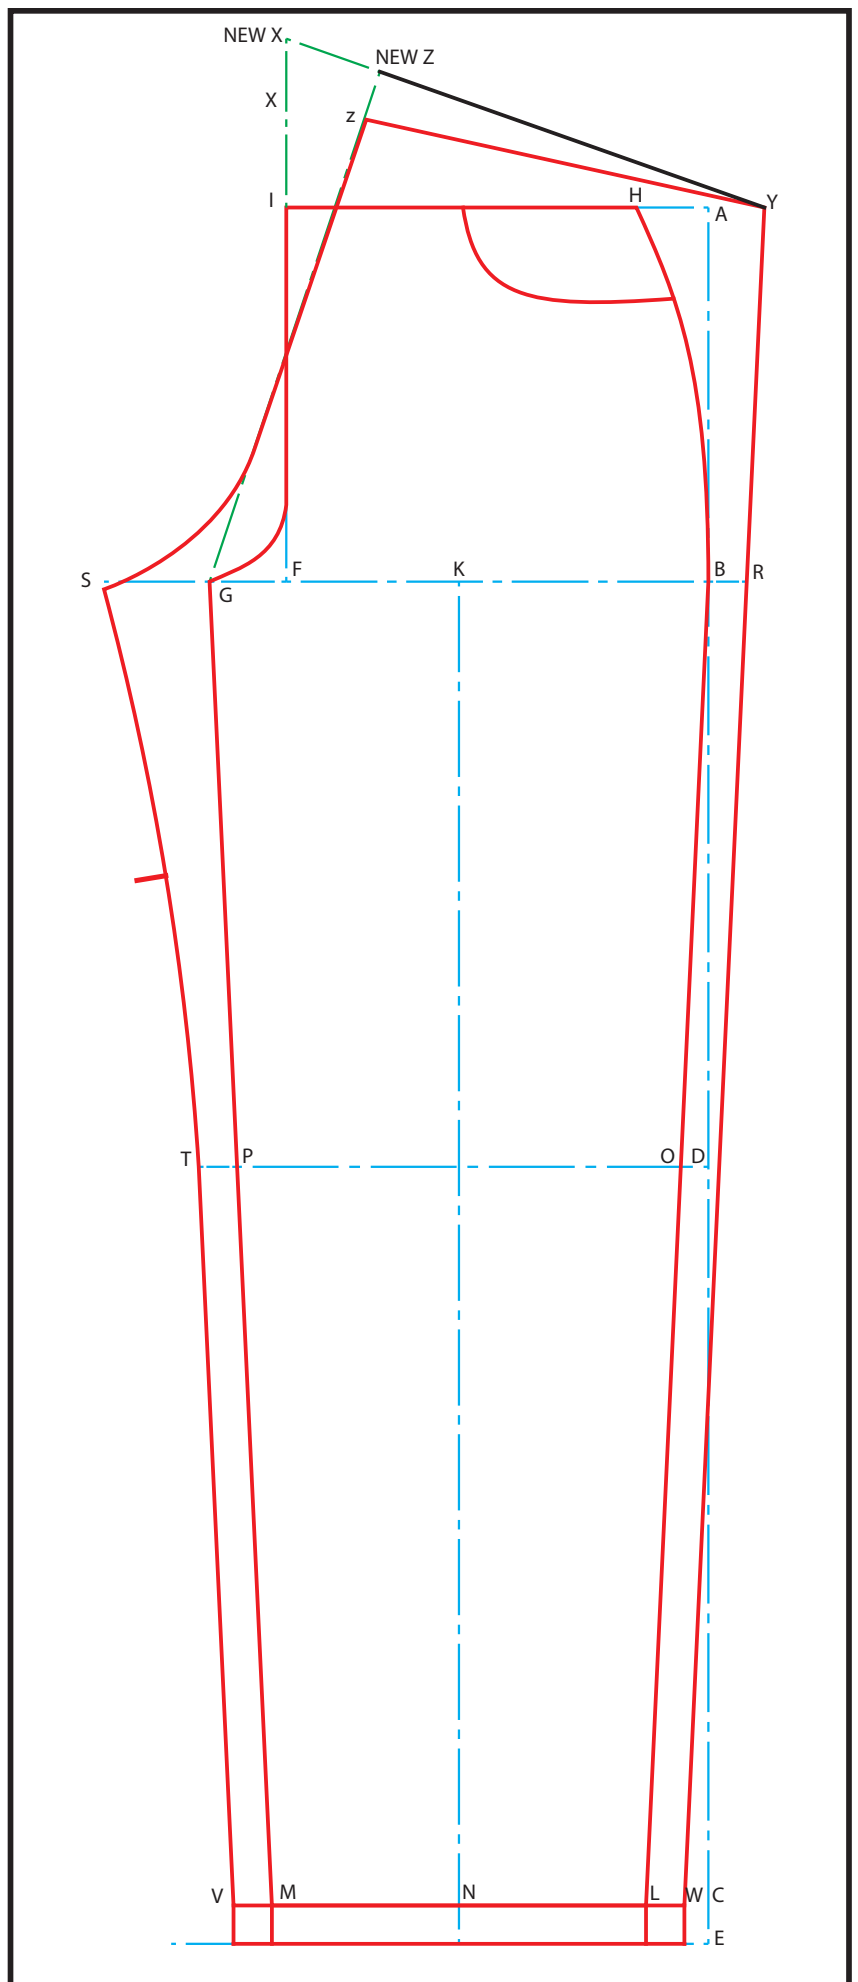

Updated draft


(Page two)

4. Shift points I and H towards the out seam $\frac{3}{4}$ of an inch
5. Lower I by $\frac{1}{4}$ inch and add a slight curve to line I-H as shown in the diagram
6. Reshape B-H and move pocket over $\frac{3}{4}$ inch
7. Create line F-AA using the dimension provided in the calculator and draw new fly I-AA-G

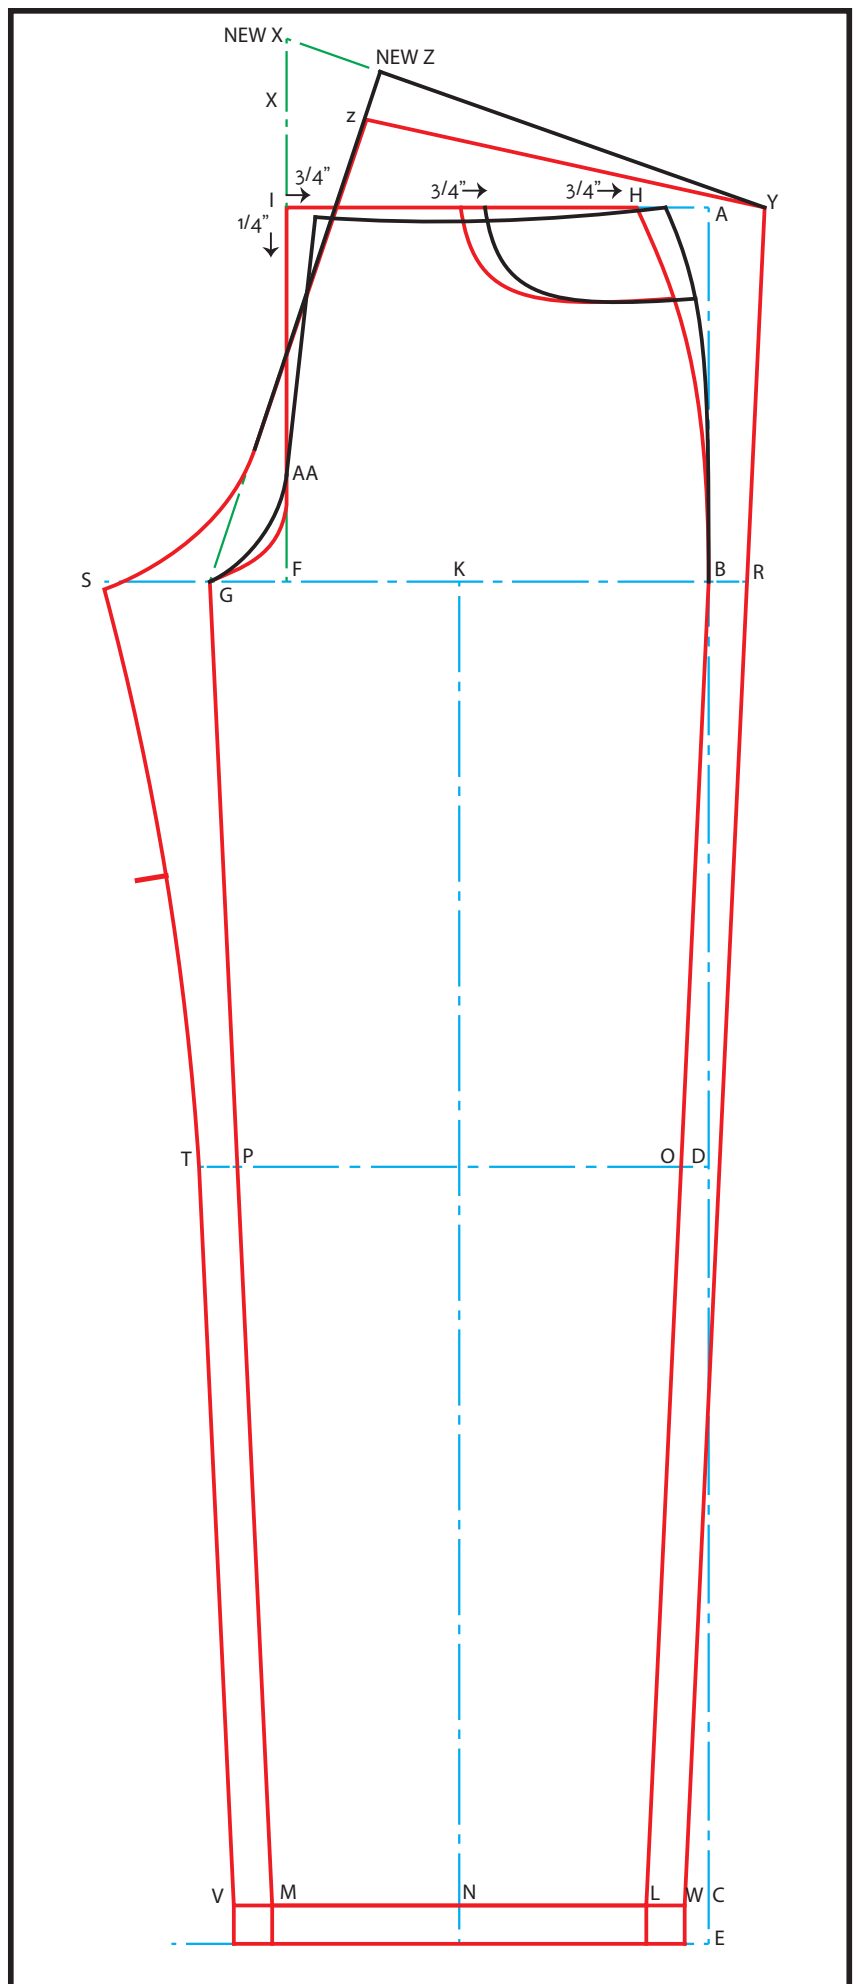

Updated draft
(page three)



8. Erase hem and square out from L and W to intersect with lines M-P and V-T creating new hem, perpendicular to the outseam NOT the construction line,
9. Square up from V and M at 90 degrees to the knee line, parallel with the outseam, to create new points for T and P
10. Move T and P down 2 inches along their respective lines

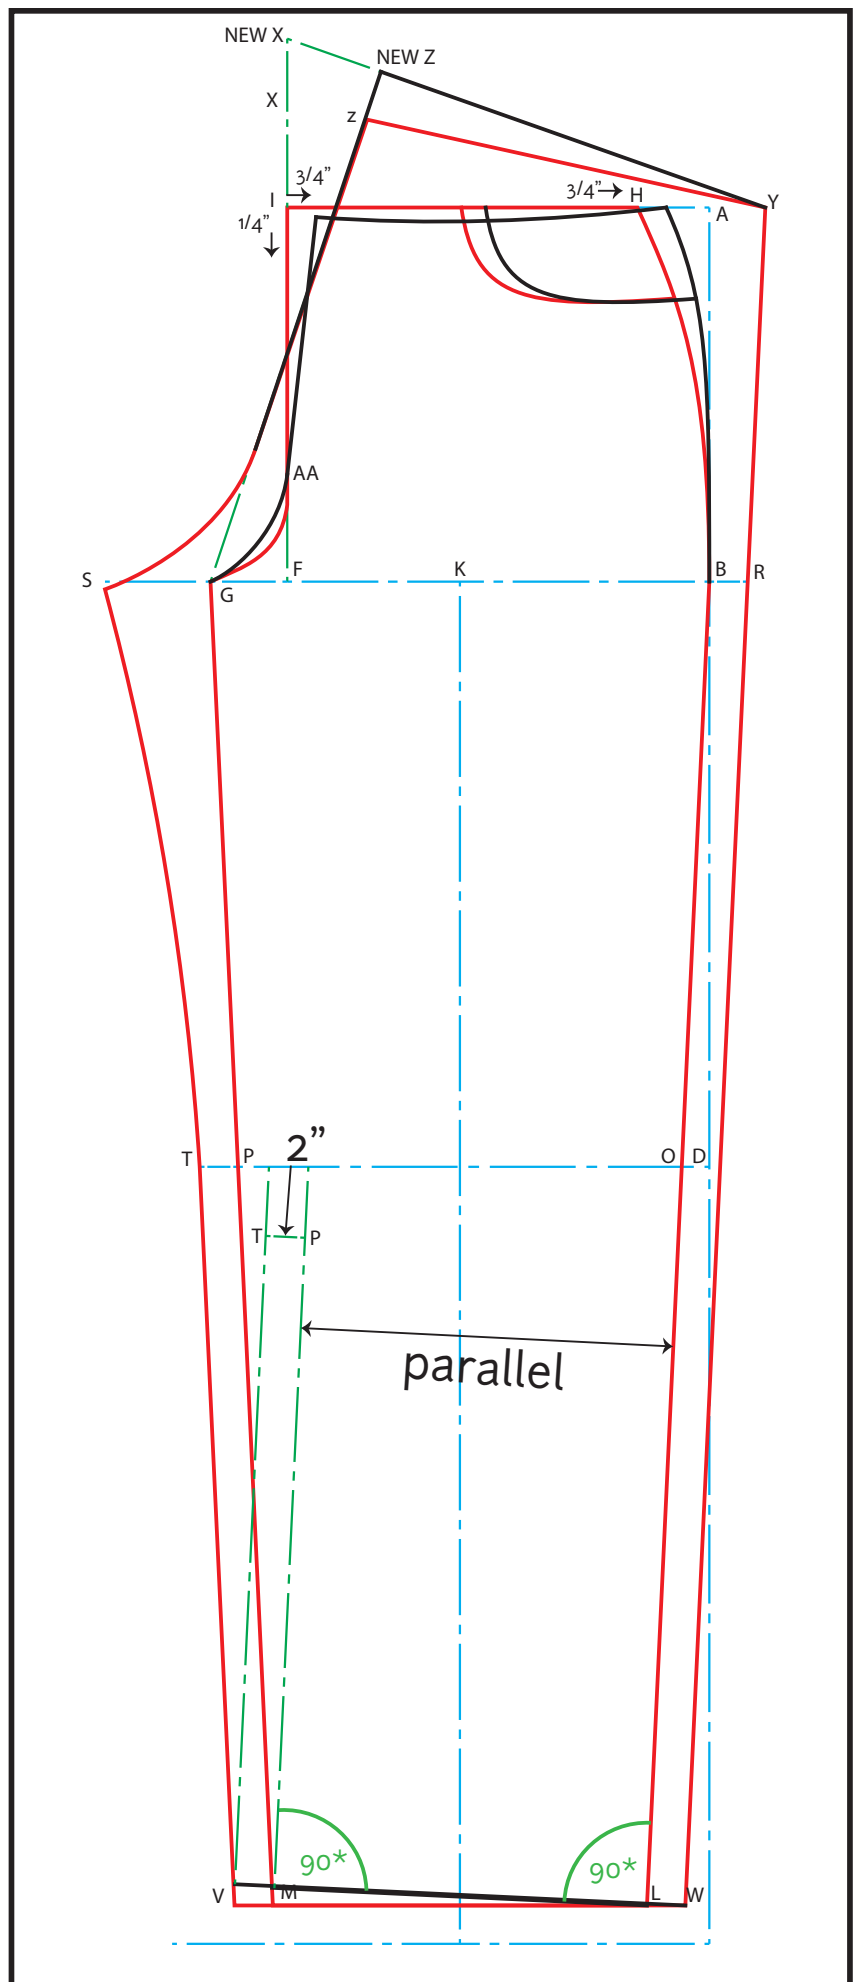

Updated draft


(page four)

11. Draw lines V-T-S and M-P-G
12. hollow out the thigh area, using the same method as described in the original draft, front thigh by $\frac{3}{4}$ inch, back thigh by 1 inch
13. Add 1 inch hem to front and back at points V, M, L, W

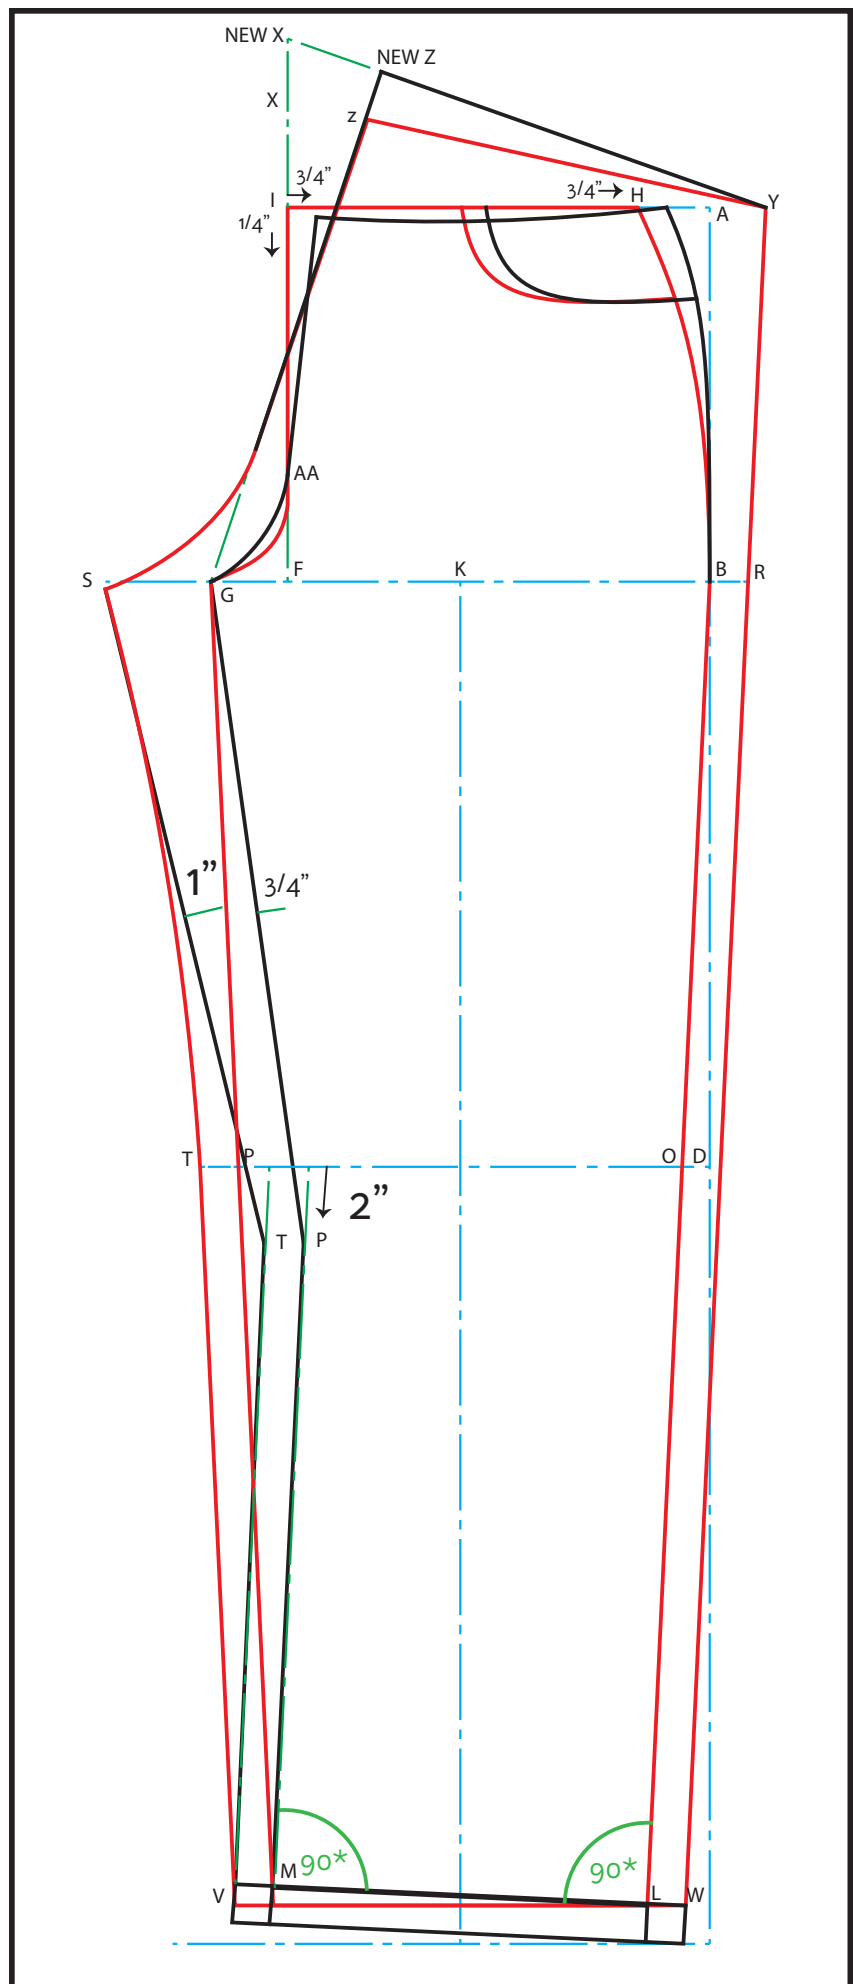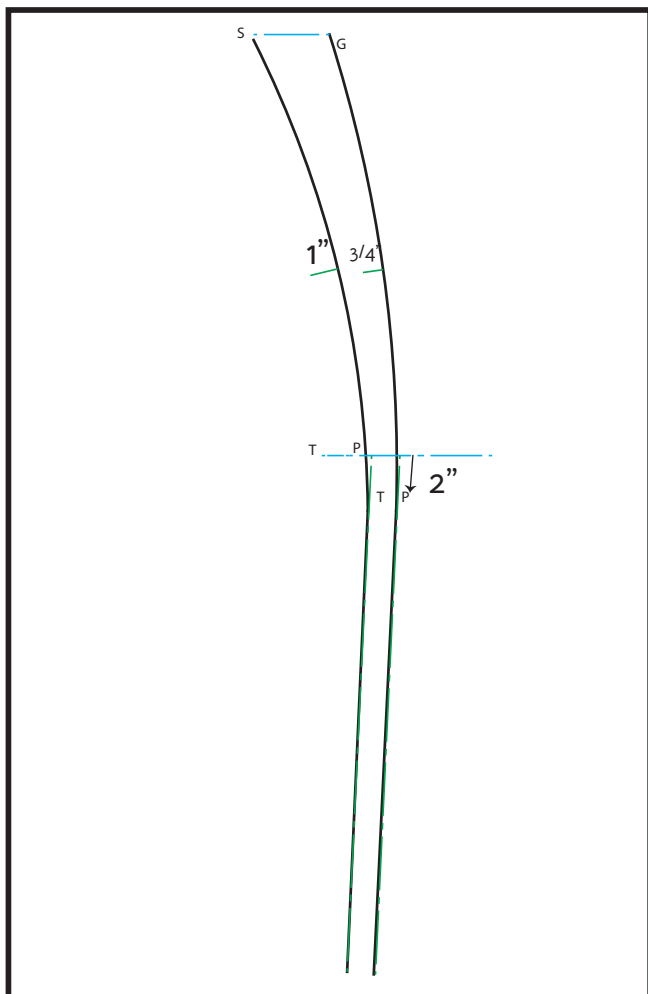

Updated draft
(page five)

Draft front and back pockets, fly, yoke,
waistband and belt loops using the same
methods as shown in the original draft,
Thus completing the draft.

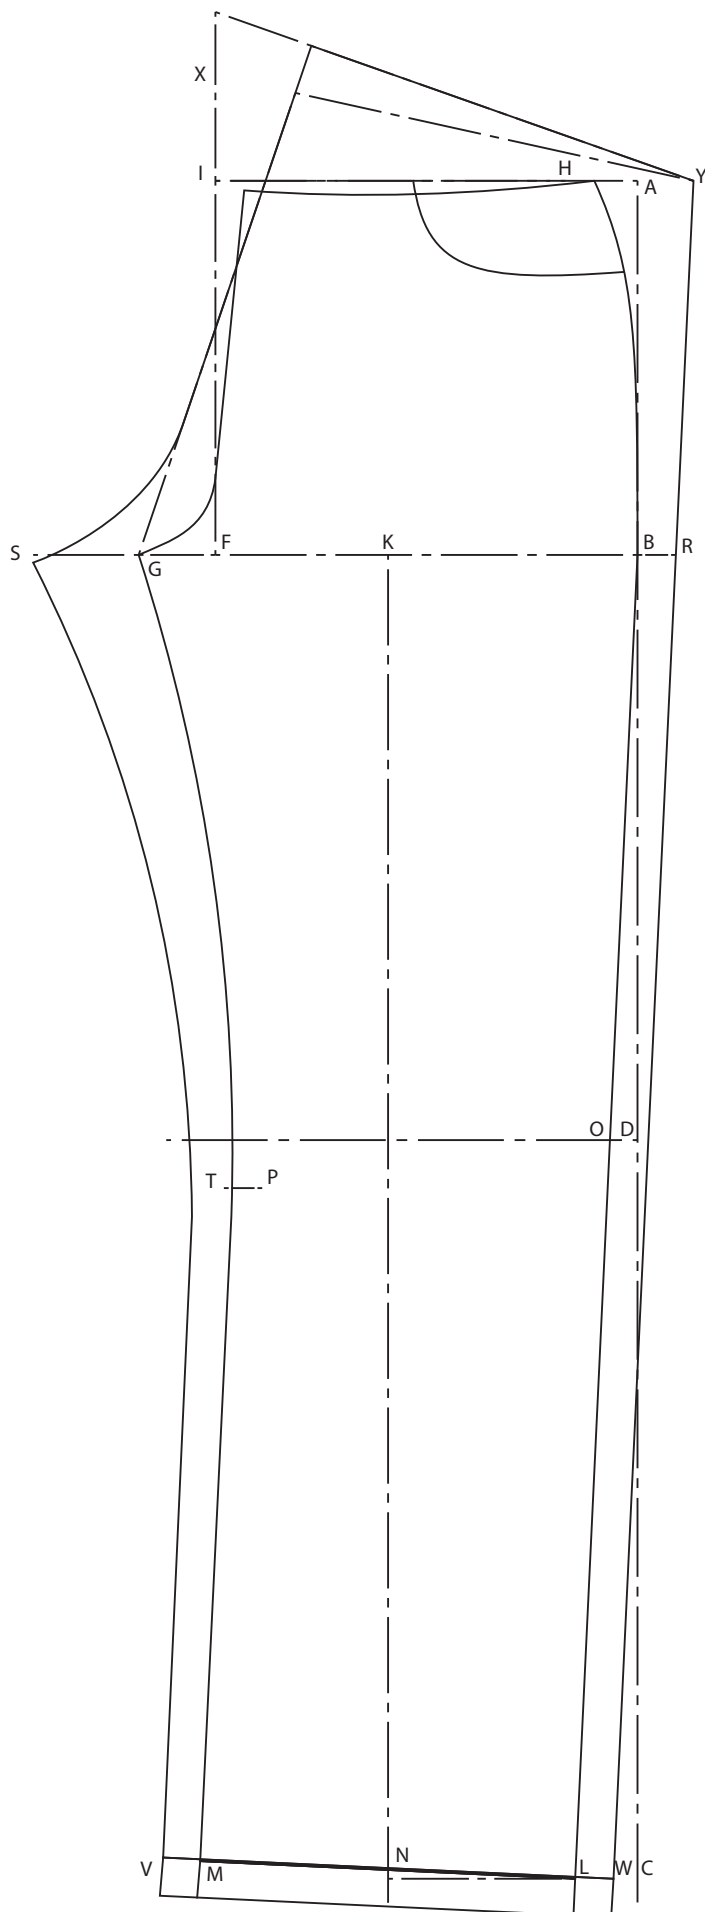

Seam Allowance

