Power Xpert XGIS
Medium-voltage switchgear

This small footprint makes a BIG impact

Eaton's Power Xpert XGIS™ medium-voltage switchgear delivers an option that is small in size and big in value, with enhanced safety, small footprint and a maintenance-free design. Eaton's compact switchgear delivers a robust design to reduce downtime and increase revenue.

Powering Business Worldwide

Global solution

Power Xpert XGIS is a global solution, designed to meet the the needs of both the IEC and ANSI markets.

- Customizable switchgear solution that can be adapted to meet the local installation requirements of the region.
- Is vendor agnostic for relay and protection schemes to meet the need of your local network.

Safety

Enhanced safety

- Tested to IEC 62271-200 type AFLR
- Protects personnel from arc flash events and reduces PPE requirements
- Hermetically sealed and fixed breaker compartment reduces the probability of arc flash events within the breaker tank.
- Side and rear arc duct, and top exhaust options

Interlocks

- Robust electrical and mechanical interlock system
- Mechanical interlocks between the 3 position switch and the circuit breaker have corresponding electrical interlocks
- Key interlocks and padlock provisions are available to provide an additional level of safety

Operation

Voltage detection system

- Provides assurance the distribution system is de-energized prior to beginning work downstream
- A standard cable side feature with option to include on the bus side
- Interlocks and visual indicators improve personnel safety

Camera port

- The state-of-the-art camera system provides a real-time view of the 3 Position Switch
- Access to camera view through front door port
- Visual position verification window also available

3 Position Switch (3PS)

- Provides a simple means of connecting the circuit breaker to main bus, isolating the circuit breaker from main bus, or putting the circuit breaker in a ready-to-ground state
- Individual ground and connect position ports to prevent accidental switching
- Redundant position verification through the camera, indicating lights and visual port
- Standard feature for circuit breakers

Tank pressure gauges

- Ability to remotely monitor pressure gauges

Installation and Maintenance

Compact footprint

- 24 and 32 inch structure widths available to accommodate a variety of relaying, metering and communication devices
- If additional space is needed a control panel can be integrated into the configuration
- Wall clearances of 4 inches from the side, 2 inches from the back, 40 inches from the front
- Front accessible design

Intelligent operation

- Eaton's Brightlayer software suite enhances a users maintenance and operation program
- With the ability to monitor circuit breaker and switch position, tank pressure and protective relaying functions, personnel can remotely monitor the switchgear health

Reduced downtime

- Sealed tank design eliminates the need for maintenance on the medium-voltage components

Ease of installation

- A shielded solid insulating system (SSIS) external to the pressurized tanks allows for simple installation of vertical sections
- No gas filling required on site during installation
- Tanks are filled and tested in the factory prior to shipment

Eaton's Engineering Services – Global reach – local depth

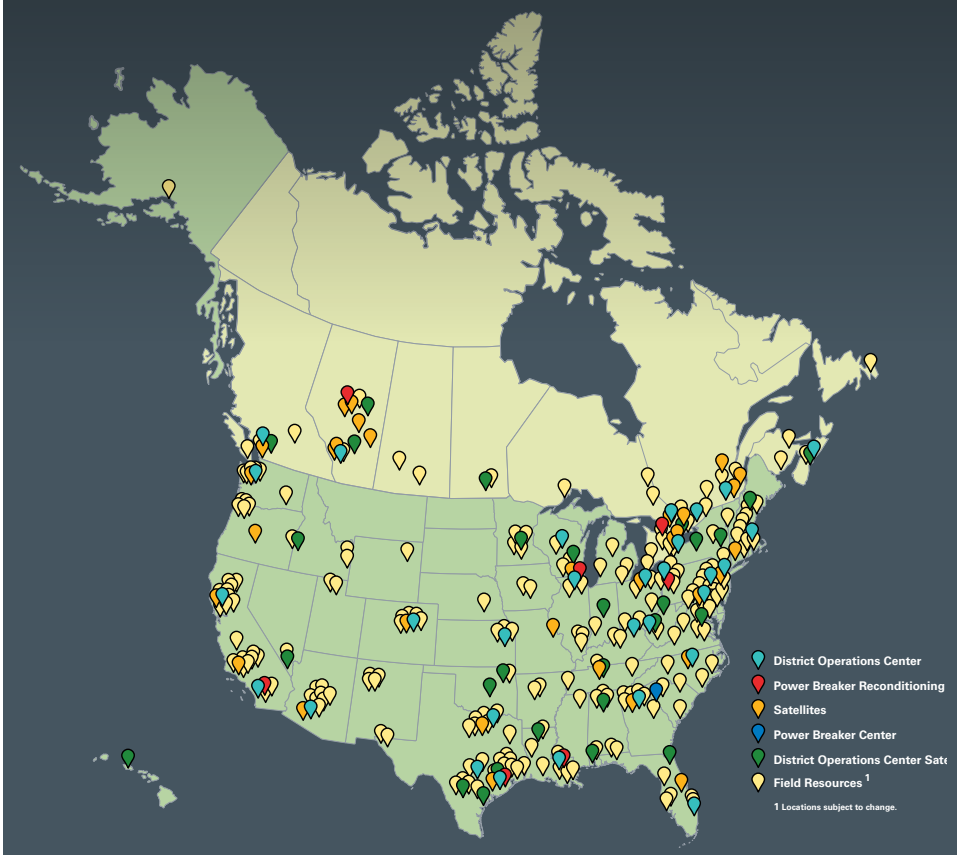

- In North America there are 1500+ qualified service professionals, 100+ power systems engineers, 100+ licensed professional engineers, and 15+ dedicated EHS and training resources available to support your needs
- Eaton utilizes the Electrical Power Testing Certification Program, from NICET, to certify field personnel in testing power distribution equipment per IEEE, NEMA, NFPA and NETA standards
- Local service centers to support your existing and future needs in a safe and cost effective manner
- One-year extended warranty on Eaton equipment with site acceptance testing performed by Eaton Engineering Services

Standards

- IEC 62271-200, LSC and AFLR
- IEC 62271-1
- IEC 62271-100
- IEC 62271-102
- IEC 60529
- ISO 9001 Certified
- CSA C22.2 No 31-2018
- IBC/CBC Seismic Qualification

Ratings

Voltage Class	Rated Continuous Current Amperes	Frequency Hz	Lightning Impulse Withstand Voltage [LIWV] (BIL) kV Peak	Rated Short-Time Short-Circuit Current Withstand (3-second) kA rms Sym	Power Frequency Withstand kV rms
5 kV	1200, 2000, 2500,	50/60	60	31.5	19
15 kV	1200, 2000, 2500,	50/60	95	31.5	36
27 kV	1200, 2000, 2500,	50/60	125	31.5	60
38 kV	1200, 2000, 2500,	50/60	170	31.5	80

To learn more about Power Xpert XGIS switchgear, visit: **Eaton.com/XGIS** or contact your local Eaton sales representative.

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2024 Eaton
All Rights Reserved
Printed in USA
Publication No. BR022010EN / 828
January 2025

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

Powering Business Worldwide