
Atex 655U



Altura do IMolde	Espessura da Lâmina	Altura Total	Largura da Nervura			Área da	Distância do C. G à		Inércia		Peso	Volume de
			Inferior	Superior	Média	Seção	Face Superior	Face Inferior	Inércia por Nervura	Altura Equivalente	Próprio	Concreto
cm	cm	cm	cm	cm	cm	cm²	cm	cm	cm⁴	cm	KN/m²	m³/m²
16,0	5,0	21,0	11,5	14,4	13,0	535	6,5	14,6	18291	15,0	2,05	0,082
	7,5	23,5				698	7,2	16,4	25815	16,8	2,68	0,107
	10,0	26,0				862	8,1	18,0	35254	18,6	3,30	0,132
18,0	5,0	23,0	11,5	14,4	13,0	561	7,1	15,9	23922	16,4	2,15	0,086
	7,5	25,5				724	7,7	17,8	32933	18,2	2,78	0,111
	10,0	28,0				888	8,6	19,4	43824	20,0	3,40	0,136
21,0	5,0	26,0	11,5	16,7	14,1	624	8,4	17,6	35176	18,6	2,38	0,095
	7,5	28,5				787	8,9	19,6	47255	20,5	3,00	0,120
	10,0	31,0				951	9,6	21,4	61213	22,4	3,63	0,145
26,0	5,0	31,0	11,5	19,3	15,4	728	10,4	20,6	60125	22,3	2,78	0,111
	7,5	33,5				892	10,8	22,7	78424	24,3	3,40	0,136
	10,0	36,0				1055	11,4	24,6	98526	26,2	4,03	0,161
30,0	5,0	35,0	11,5	21,7	16,6	826	12,1	22,9	87207	25,2	3,15	0,126
	7,5	37,5				989	12,4	25,1	111757	27,4	3,78	0,151
	10,0	40,0				1153	13,0	27,0	138080	29,4	4,40	0,176
d1	ds	D	bi	bs	br	Α	rs	ri	1	heg	Concreto 25 kN/m ³	



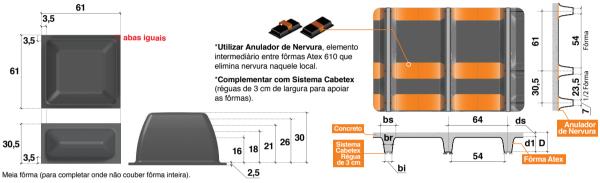