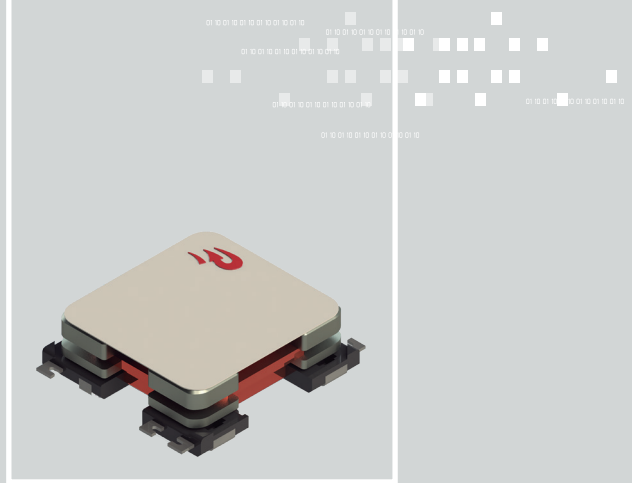


3DV09**SMD 3D Coil****9.5x9.5x3.2mm**

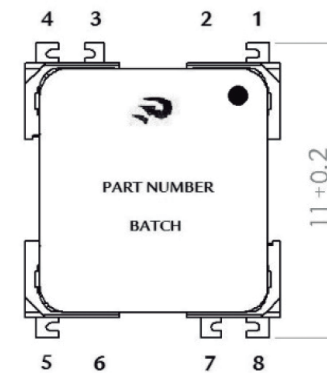
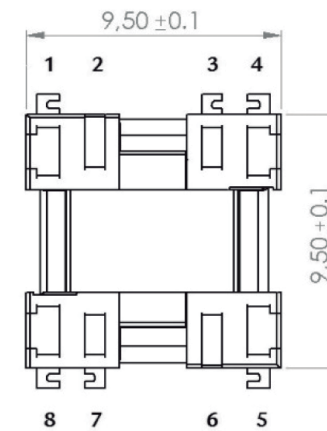
Rx EM MOTION TRACKING SENSORS

**FEATURES**

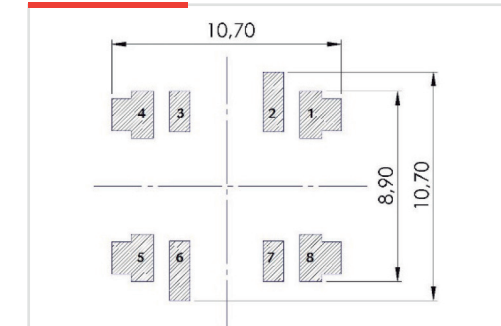
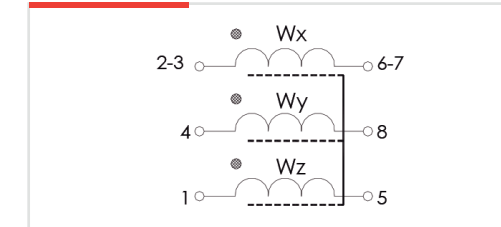
Electromagnetic motion tracking system Works by using one low frequency isotropic magnetic field generator and one or several isotropic 3D magnetic sensors. 3D coils have huge flexibility in terms of customization and setup to fulfill the application needs or environment changes. Size of this coil makes it suitable in several applications where reduced size is a must.

01**CHARACTERISTICS**

- › Size 9.5x9.5x3.2 mm
- › SMD solution
- › Suitable for AOI
- › Inductance range: 2-20 mH
- › Labelled to allow P&P operations
- › Sensitivity over 20 mV/A/m.

02**DIMENSIONS****DIMENSIONS (mm)**

› Pins coplanarity 0.1 mm

RECOMMENDED PAD-LAYOUT**ELECTRICAL DIAGRAM****ELECTRICAL SPECIFICATIONS | 3DCVg-A-2000J**

L x,y,z (mH)	18(xy)/30(z)
Qx,y nom	4.5(x) /4(y)
4.5(x) /4(y)	5.5
f(kHz)	20
SRFx,y (kHz) Min	150
SRFz (kHz) Min	450
DCRx (Ohm) Max	520
DCRy (Ohm) Max	570
DCRz (Ohm) Max	715
Sensitivity x,y (mV/A/m) Min (*)	20
Sensitivity z (mV/A/m) Min (*)	15

(*) Ask for sensitivity test set up and recommendations