

Triangle marks LED anode. Cathode has bond wire and rounded pad corner.

This end portion is glued to a support in the final assembly, and does not flex in operation.

Polyimide stiffener to make 0.3mm overall thickness.

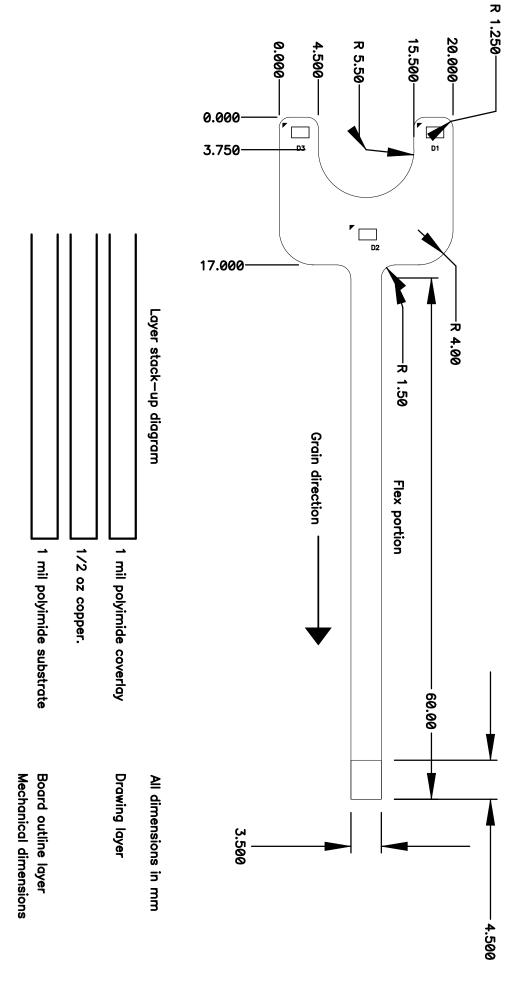

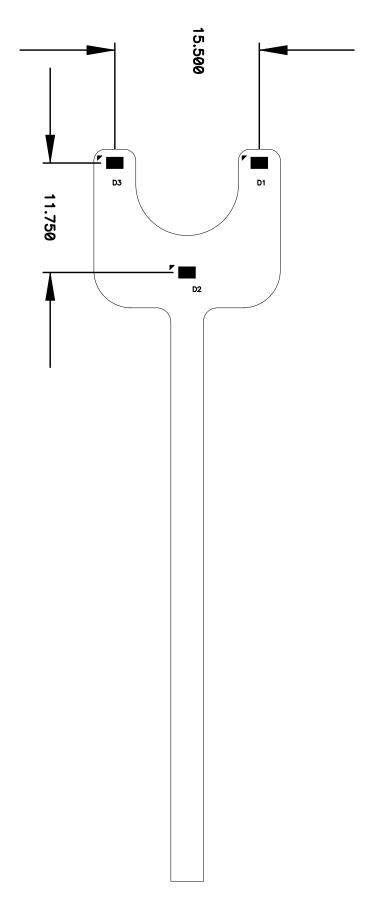

Board outline layer