ROS 2

Sensor sampling and image processing

Roberto Masocco
roberto.masocco@uniroma2.it

University of Rome Tor Vergata
Department of Civil Engineering and Computer Science Engineering

June 7, 2023

TOR VERGATA
UNIVERSITY OF ROME
School of Engineering

Recap

ROS 2 offers a common framework for the development of **robotics software**, providing services for:

- **organizing** and **building** a **distributed** software architecture;
- establishing mostly self-configured **inter-process communication** among modules;
- modules **configuration** and **management**.

The last two lectures will show **real applications** of these tools.

This lecture is here.

Recap

Updates

- **New code examples available.**
- You can build the new examples, but you need to **install additional dependencies**:
  - `ros-humble-cv-bridge`
  - `ros-humble-image-common`
  - `ros-humble-image-transport`
  - `ros-humble-image-transport-plugins`
  - `ros-humble-vision-opencv`
  - `ros-humble-vision-msgs`
- **For full functionality, a host Linux installation is required.**

Roadmap

1. Sensor sampling
2. Image processing
3. Software tools of the trade
4. Examples: a target detection pipeline

Roadmap

Sensor sampling basics

From theory to practice

Sampling a sensor consists of reading **measurements** from it, to be fed to a control loop or some other subsystem.
It requires:

- the definition of a **sampling frequency**;
- the implementation of an **encoding**;
- the application of **post-processing** steps (*e.g.*, **filtering**).

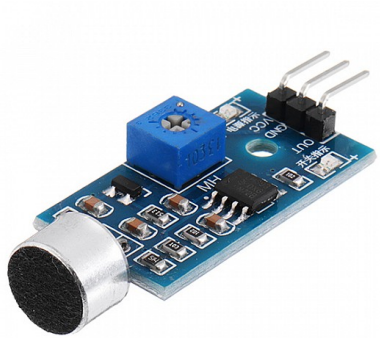

Figure 1: Analog sound sensor.

Sampling is generally handled by **microcontrollers**, but when the sampling frequency is not too high, *e.g.*, down to some ms, it can be carried out by a higher-level device.
To implement a ROS 2 sensor sampling module, one has to develop a **driver node**, *i.e.*, an application that:

- configures the **sensor hardware** to run as required;
- ensures **stable sampling frequency** and **low jitter**;
- outputs data with a **standard interface** and **low latency**.

The achievement of the first goal depends on the **sensor**, the second on the **system** (hardware and software!), while the third one is solved by ROS 2 (**messages**, **QoS**).

Must take the best of both worlds: robotics and system programming!

Anatomy of a driver node

Guidelines and best practices

In essence, a **driver node** always consists of:

- an **enable service**, to be called to start or stop the sampling;
- a **hardware configuration** routine, to be run at startup or when enabled;
- a **sampling loop**, to be run at a fixed frequency in a separate **thread**;
- a **publisher** using a common message type and an appropriate QoS policy;
- a set of **parameters** to configure the sensor and the sampling loop;
- **launch files** and **configuration files**, to configure remapping rules and node behaviour.

Roadmap

1. Sensor sampling
2. Image processing
3. Software tools of the trade
4. Examples: a target detection pipeline

Visual sensors, commonly referred to as **cameras**, are sensors that provide **images** as output, encoded in **frames**, *i.e.*, **matrices** of data points. They are usually made of:

- one or more **optical lenses**, to focus light on the sensor;
- a **sensor**, to convert light into electrical signals;
- a **processing unit**, to convert electrical signals into images, optionally applying **post-processing** steps.

Figure 2: RGB USB camera.

Light might not belong to the visible band of the spectrum.

Figure 3: Intel RealSense D435i depth camera: RGB and IR sensors.

Cameras are usually characterized by:

- **resolution**, *i.e.*, the number of pixels in the image;
- **field of view**, *i.e.*, the angular extension of the scene (horizontal and vertical);
- **frame rate**, *i.e.*, the number of frames per second;
- **dynamic range**, *i.e.*, the ratio between the maximum and minimum measurable light intensity.

Figure 4: Intel RealSense T265 tracking camera: two fisheye sensors.

Cameras, and image processing algorithms in general, are usually characterized by a trade-off between resolution and frame rate.

Figure 5: ZED Mini stereo tracking camera.

Vision in robotics

Main use cases

Visual sensors are usually employed in robotics for:

- **object detection**, *i.e.*, identifying objects in the scene;
- **object tracking**, *i.e.*, following objects in the scene;
- **localization**, *i.e.*, estimating the robot's position in the environment;
- **mapping**, *i.e.*, building a model of the environment.

Using the sensor is not enough: **algorithms** are needed to perform these tasks.
Such algorithms usually run in separate modules.

Types of frames

RGB frame

Figure 6: RGB frame: each pixel contains at least the intensities of the red, green and blue components of the corresponding point in the scene.

Figure 7: IR frame: each pixel contains the intensity of the corresponding point in the scene.

Figure 8: Depth map frame: each pixel contains the distance of the corresponding point from the camera.

Lens distorsion

Camera calibration and rectification

Pinhole cameras generally introduce **radial distortion** in the images they produce, *i.e.*, **straight lines appear curved**. This is due to how the light enters the camera through the lens.

A **camera calibration** procedure is needed to estimate the parameters of the **distorsion model**, so that a **rectification map** can then be applied to each frame.

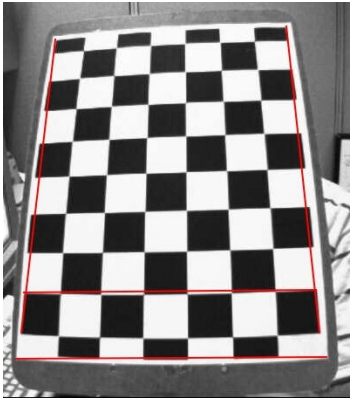

Figure 9: Checkerboard pattern used for camera calibration in the presence of radial distortion.

The calibration procedure usually involves moving a **checkerboard** of known dimensions in front of the camera, and taking several pictures of it from different angles.

An **estimation model** can then be used to estimate the parameters of the distorsion model, which can then be used to build the rectification map.

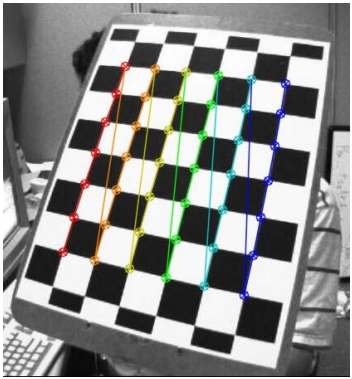

Figure 10: A frame from a checkerboard calibration procedure.

The **rectification map** is a **lookup table** that associates each pixel in the original frame with a pixel in the rectified frame, **interpolating** when necessary.

It is usually stored in **configuration files**, and must be applied to each frame before it can be used by other algorithms.

ROS 2 offers the `cameracalibrator` tool in the `camera_calibration` package to perform camera calibration.

Figure 11: Checkerboard pattern after rectification.

Roadmap

OpenCV

The de-facto stadard library for computer vision

OpenCV is the largest open-source library for real-time **computer vision** and **image processing**. It has been developed initially by Intel, and evolved in a **cross-platform** library supporting **C++** and **Python**.

It ships with hundreds of **APIs** and **algorithms** to perform a wide variety of image processing and computer vision tasks and computations.

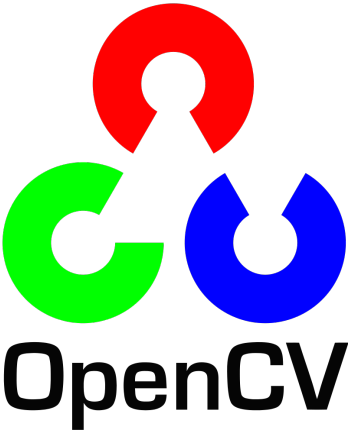

Figure 12: OpenCV logo.

OpenCV

The de-facto stadard library for computer vision

In Linux, it is available as **binary packages**, but the full range of features can be enabled only by **configuring a source build**.

Its **elementary data type** is a **matrix**: `cv::Mat`.

It is **heavily optimized** to run on:

- **parallel CPUs**;
- **GPUs** (*e.g.*, `cv::cuda`, `cv::ocl`);
- **embedded devices** (*e.g.*, Nvidia Jetson).

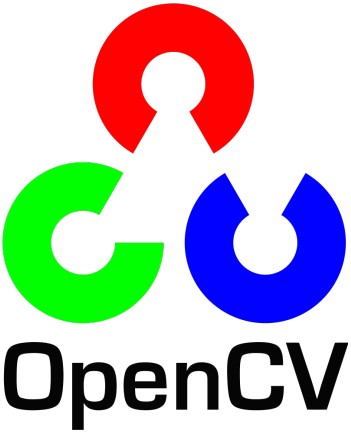

Figure 12: OpenCV logo.

ROS tools for image processing

A quick overview

ROS 2 provides a wide range of **tools** to acquire, process, and transmit images. The most important ones are:

- `sensor_msgs/Image`: the standard ROS **message type** to transmit **images** over the DDS layer;
- `sensor_msgs/CameraInfo`: the standard ROS **message type** to transmit and parse **camera calibration parameters**;
- `image_transport`: a ROS package to **transmit images** over the DDS layer;
- `camera_info_manager`: a library to parse, use, and store **camera calibration parameters** from configuration files and messages inside ROS nodes.

```
1  std_msgs/Header header
2
3  uint32 height
4  uint32 width
5
6  # This can be RGB, BGR, RGBA, BGRA, YUV, Bayer, etc.
7  string encoding
8
9  uint8 is_bigendian
10 uint32 step
11 uint8[] data
```

Listing 1: Definition of the sensor_msgs/msg/Image message.

ROS tools for image processing

Sending images over the DDS

Using images and video streams in general over the DDS layer is **not trivial**, since:

1. we would like some kind of **specialized transport strategy** to optimize throughput and latency;
2. the DDS specification is **not optimized** to transmit **large** and **variable-size** data chunks over potentially **lossy** networks, *e.g.*, WiFi.

`image_transport` is a ROS 2 library that provides **wrappers** for **topic publishers** and **subscribers**, allowing to transmit images using different **transports**:

- `raw`: the default transport, which uses the `sensor_msgs/Image` message;
- `compressed`: uses the `sensor_msgs/CompressedImage` message, automatically converting frames to `JPEG` or `PNG` format;
- whatever you want to implement as a **plugin**.

Beware!

1. When measuring image topics publishing rates with `ros2 topic hz`, especially **over a lossy network**, you may get **wrong results**. This is because of:
   - the **Python DDS implementation**;
   - the **hz** Python tool buffering messages into a window-based filter.

   To check the real sampling and receiving rates, **place publishers of ordinary messages** in your code on both ends, and inspect those instead!
   Suggestion: `std_msgs/Empty`.
2. Always use a **best effort** reliability policy in the **QoS** policy.

Roadmap

1. Sensor sampling
2. Image processing
3. Software tools of the trade
4. Examples: a target detection pipeline

ArUco detection pipeline

A real example from LDC22

Examples for this lecture are in the `cpp/image_processing` directory.
There are **three nodes**:

1. `ros2_usb_camera`: acquires images from a USB camera;
2. `aruco_detector`: detects ArUco markers in a video stream;
3. `rqt_image_view`: forked version of the official ROS 2 video stream visualizer.

These three nodes form a **pipeline** to detect **ArUco markers** in a video stream, and show them in a **GUI**. They are **completely configurable**, and **optimized** to run on **GPU** and similar hardware. They make use of **all the features we have seen so far**, plus composition: a way to include **multiple nodes** in a **single running process**, loading and unloading them dynamically, scheduling their work, and benefitting of **zero-copy** data transfer and shared address space.

Multiple instances of these nodes were active during the Leonardo Drone Contest 2022!