



v4 wafer chuck -- 2D axisymmetric FV thermal FEA, 65 W steady beam


(a) $T(r,z)$ -- STATIONARY column (Gaussian $\sigma=10$ mm), TEC ON
 $\Delta T_{\text{wafer}} = 25751.9$ mK (catastrophic, see v4 §6.5)

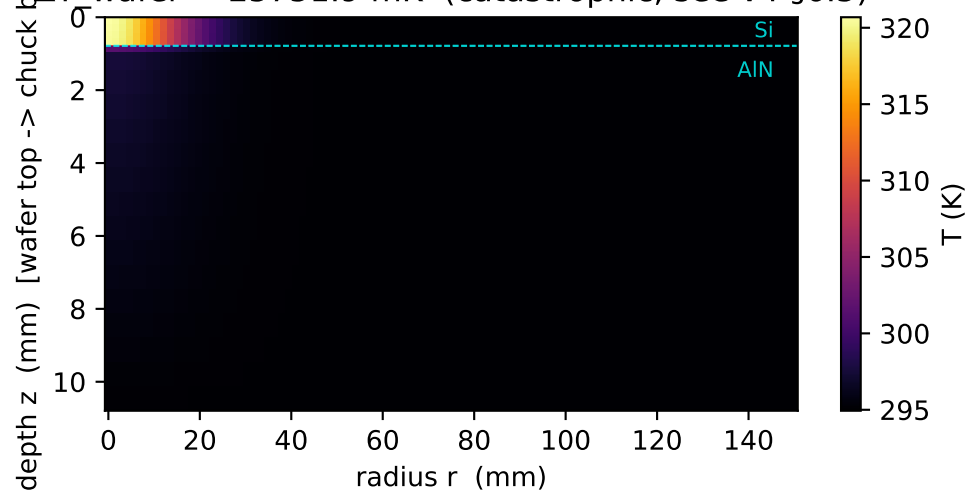


(b) $T(r,z)$ -- SCANNED uniform 920 W/m² (spec mode), TEC ON
 $\Delta T_{\text{wafer}} = 0.131$ mK

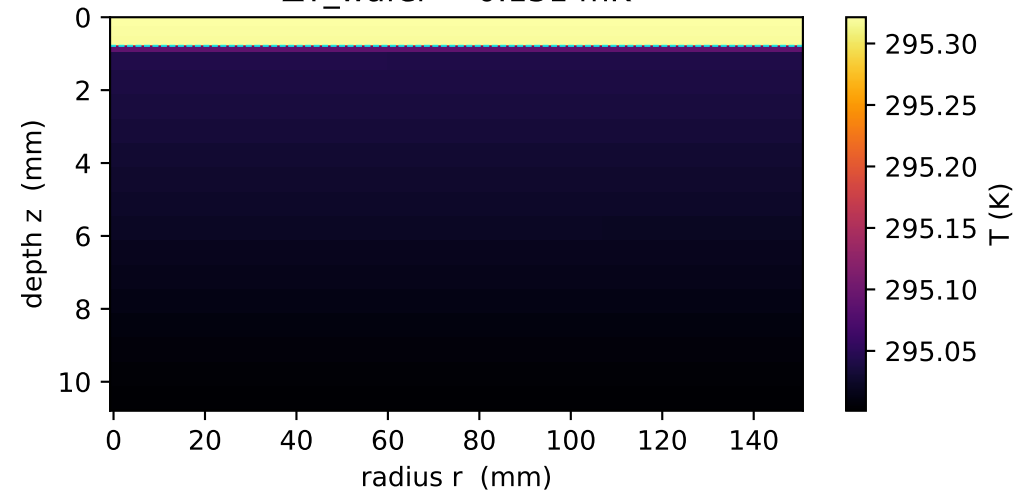


(c) SCANNED case -- wafer-top profile (the spec)

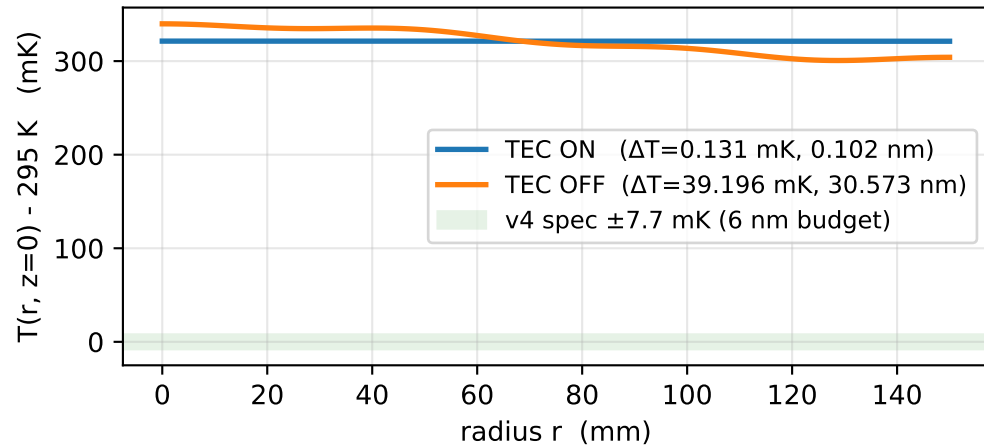

(d) STATIONARY case -- wafer-top profile (worst-case)

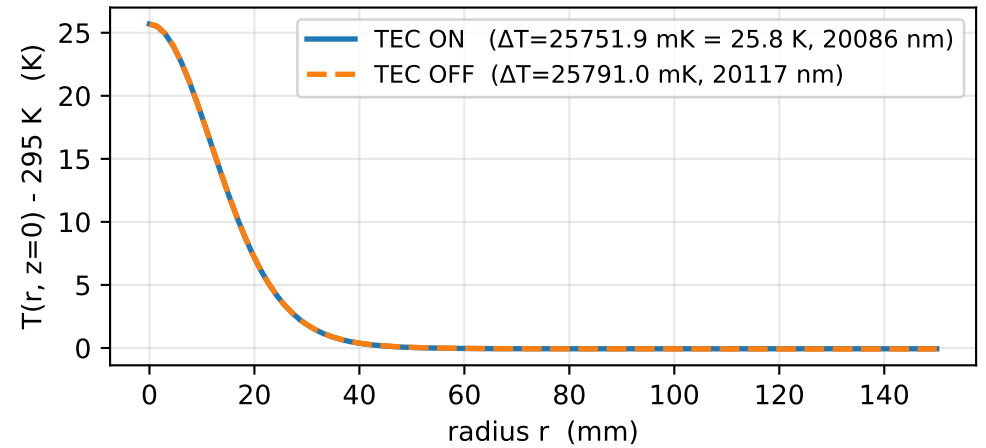

(e) Beam-deposition profiles, 65 W total each

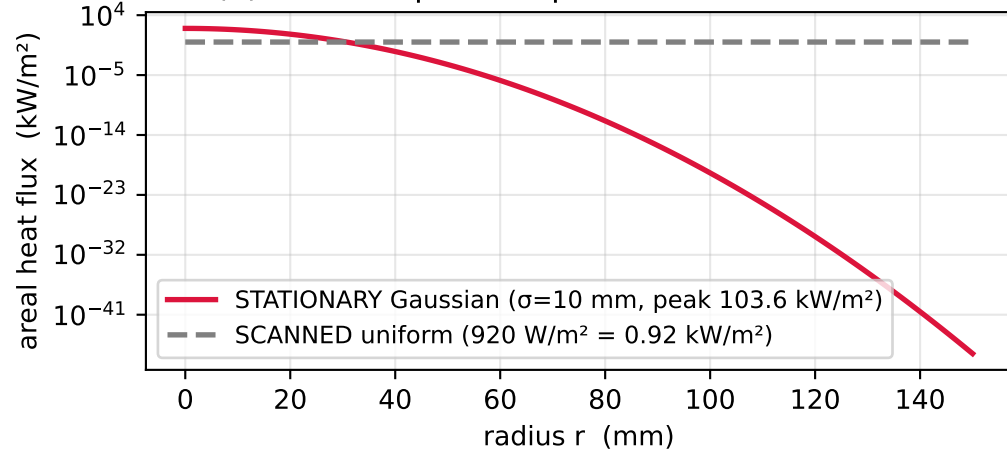

(f) SCANNED case -- chuck-top temperature (Dirichlet-driven)

