




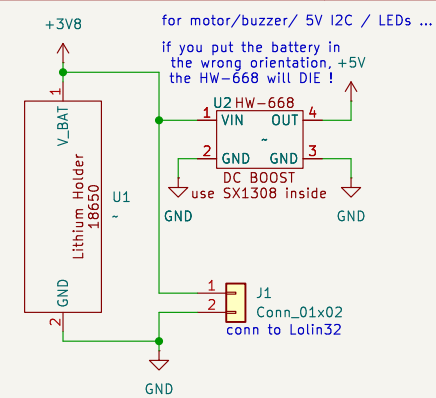

Lithium Cell + DC Boost


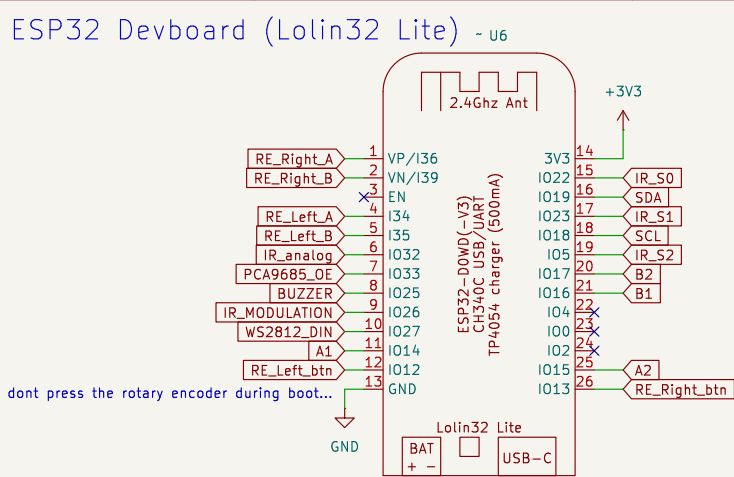


DC motor Driver

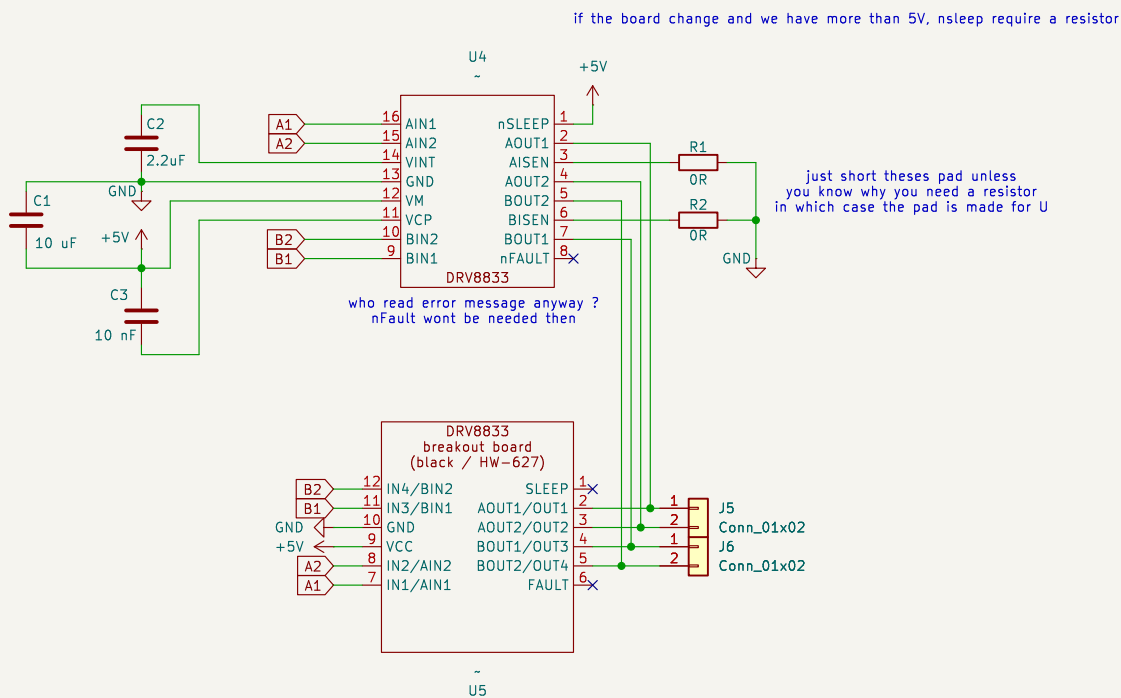


the breakout board can be mounted or the individual component can be soldered but not both at the same time.

Servo Driver

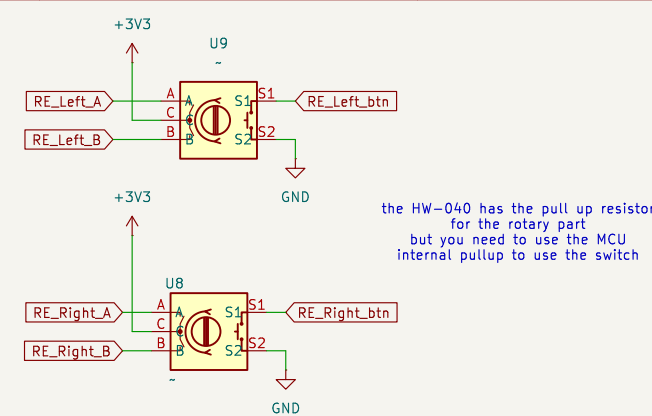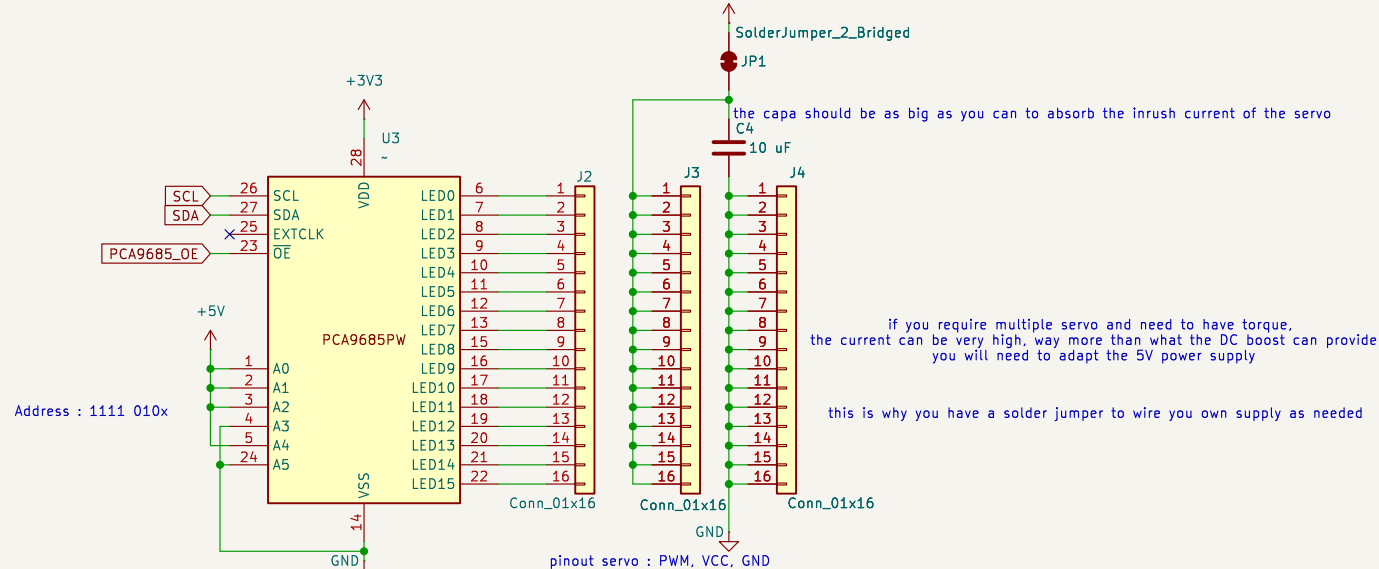


Rotary Encoder (HW-04)

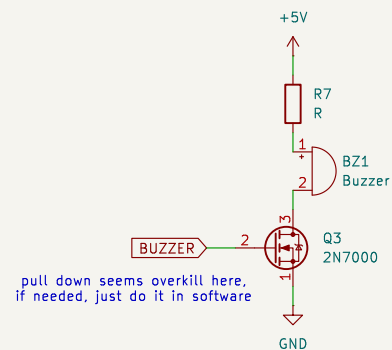


Buzzer



no logic level, worst case scenario, the first LED will glitch and act as a level shifter

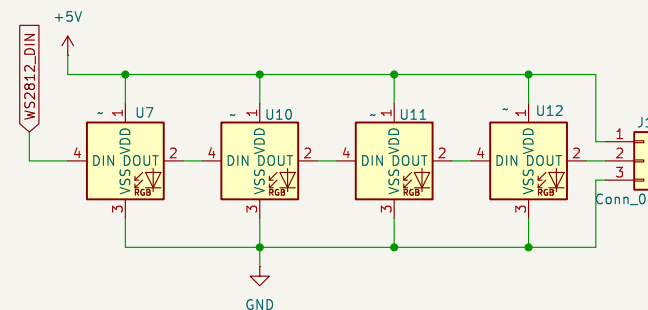

WS2812 RGB addressable LED

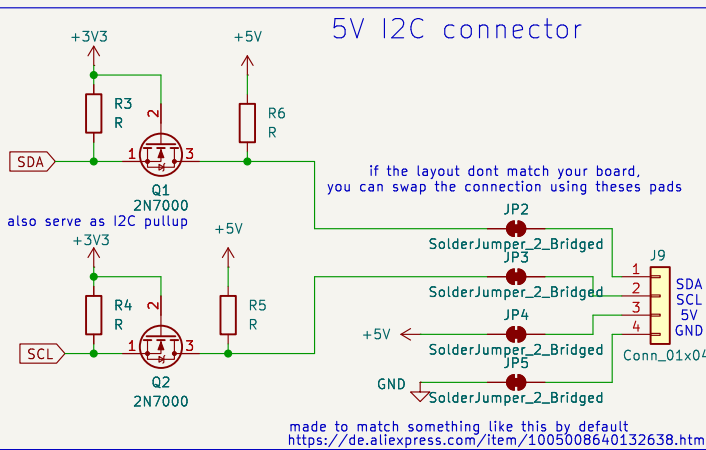

3V3 I2C connector (QWIIC)

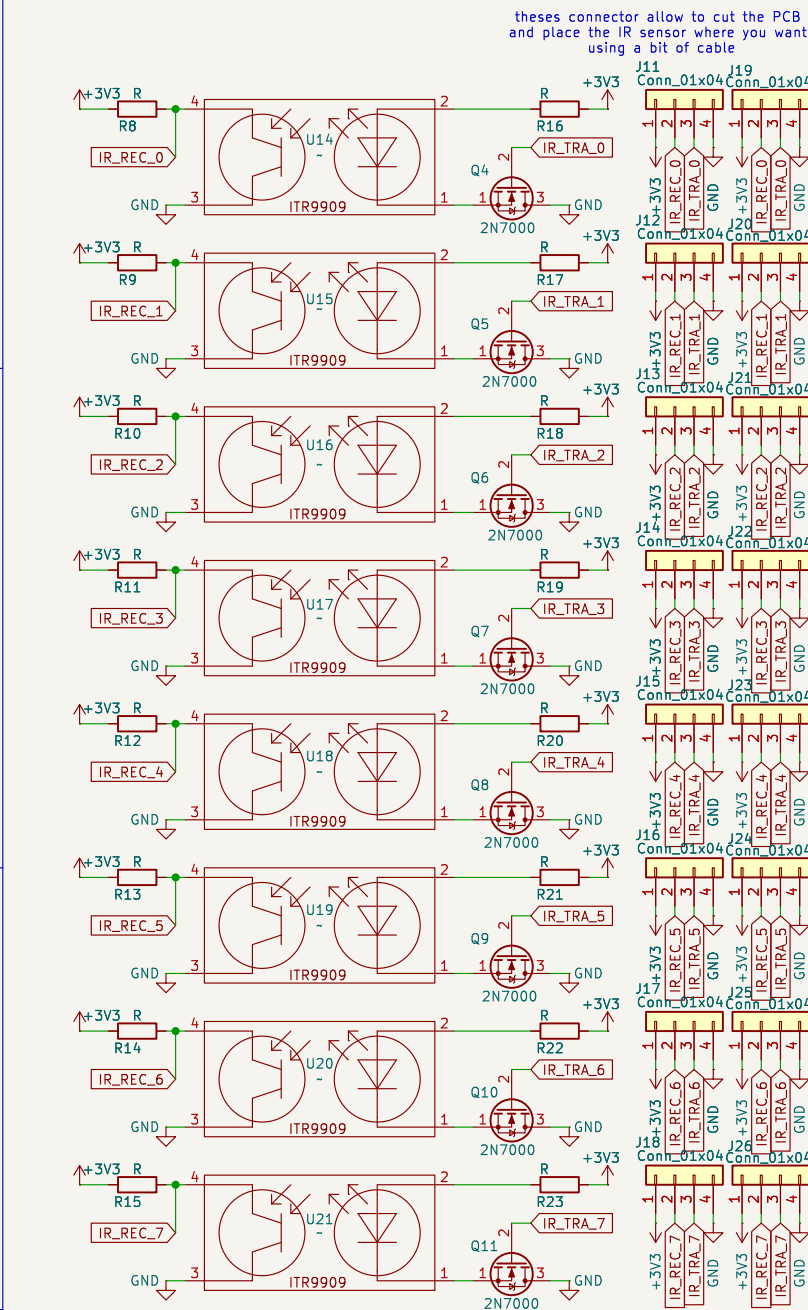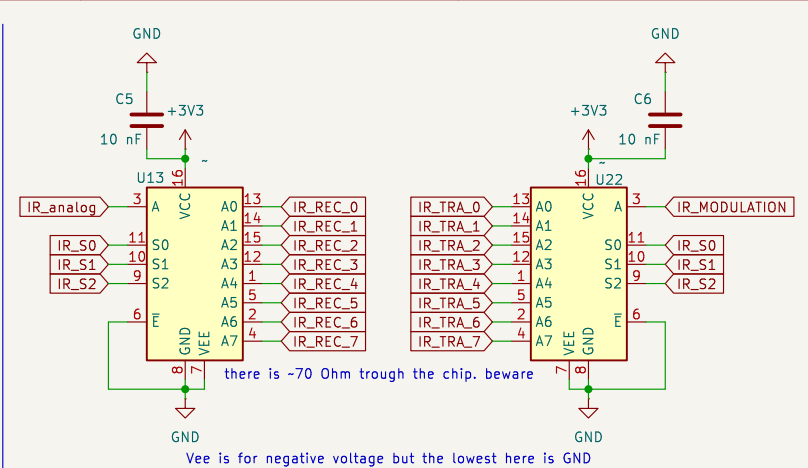

Nathann Morand

Robopoly

Sheet: /

File: kit-prisme.kicad_sch

Title: Kit Prisme

Size: A3

Date: 2025-11-02

Rev: v4

KiCad E.D.A. 9.0.6

Id: 1/1