Surface Mount Fuses

For NANO^{2®} Surface Mount Fuses

RoHS SMF OMNI-BLOK® Fuse Block Molded Base Type 154 Series



Littelfuse



The RoHS Compliant SMF Omni-Blok® Fuseholder permits quick and easy replacement of Nano2® SMF surface mount fuses. The fuse block and pre-installed fuse combination can be placed on the PC board in one efficient manufacturing operation. Fuse replacement is accomplished without exposing the PC board to the detrimental effects of solder heat. Refer to notes 1 and 2, below, for fuse/fuseholder combinations available.

AGENCY APPROVALS: Recognized under the Components Program of Underwriters Laboratories and Certified by CSA.

SPECIFICATIONS:

Electrical: 8 Amperes, 125 Volts.

Molded Parts: Thermoplastic (94V0).

Terminals: Tin Plated Copper.

Ambient Temperature: -55°C to +125°C. Shock: MIL-STD-202, Method 213, Test Condition I

(100 G's peak for 6 milliseconds).

Vibration: MIL-STD-202, Method 201 (10–55 Hz). **Thermal Shock:** MIL-STD-202, Method 107, Condition A (200 cycles: 30 minutes at –55°C, 30 minutes at 125°C).

Soldering Parameters (Fuse Installed):

Reflow — 154 000: 446°F (230°C), 30 sec. 154 000T: 446°F (230°C), 30 sec.

Solderability: MIL-STD-202, Method 208.

Packaging: 16mm Tape and Reel for use with automatic pick and place equipment per EIA Standard 481; 1,500 per reel, add suffix DR.


PATENTEDORDERING INFORMATION:


With Very Fast-Acting Fuse Installed		
Catalog Number	Ampere Rating	Fuse Furnished¹
154.062 154.125 154.250 154.375 154.500	1/16 1/8 1/4 3/8 1/2	0451.062 0451.125 0453.250 0453.375 0453.500
154.500 154.750 154.001 154.01.5 154.002 154.02.5	3/4 1 1.5 2 2.5	0453.750 0453 001. 0453 01.5 0453 002. 0453 02.5
154 003 154 03.5 154 004 154 005 154 007 154 008 154 010	3 3.5 4 5 7 8	0453 003. 0453 03.5 0453 004. 0453 005. 0453 007. 0453 008. 0453 010.


With Slo-Blo® Fuse Installed

Catalog Number	Ampere Rating	Fuse Furnished²
154 .375T	3/8	0454 .375
154 .500T	1/2	0454 .500
154 .750T	3/4	0454 .750
154 001T	1	0454 001.
154 01.5T	1 ¹ / ₂	0454 01.5
154 002T	2	0454 002.
154 02.5T	21/2	0454 02.5
154 003T	3	0454 003.
154 03.5T	31/2	0454 03.5
154 004T	4	0454 004.
154 005T	5	0454 005.


¹ 453 Series Fuse has silver plated end caps, installed to accommodate solder reflow process. Use either 451 or 453 Series for replacement purposes, page 371.

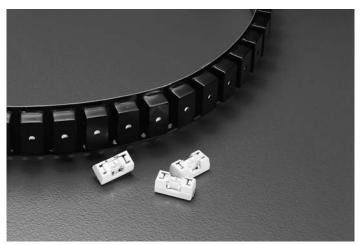

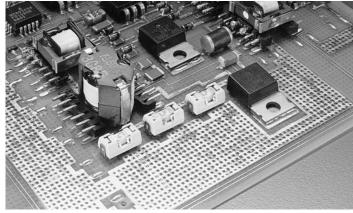



Recommended Pad Layout

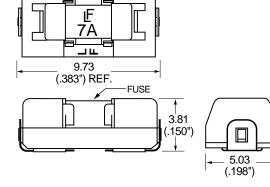

² 454 Series Fuse has silver plated end caps, installed to accommodate solder reflow process. Use either 452 or 454 Series for replacement purposes, page 372.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

154.750 15403.5 154004 0154.062DRL 0154.125DRL 0154.250DRL 0154.375DRL 0154.375DRL 0154.375DRTL 0154.500DRL 0154.500DRTL 0154.500DRTL 0154.750DRTL 0154001.DRL 0154001.DRL 0154002.DRL 0154002.DRL 0154003.DRL 0154003.DRL 0154003.DRTL 0154004.DRTL 0154005.DRTL 0154007.DRT 0154003.5DRL 015401.5DRL 0154004.DRL 0154005.DRTL 0154004.DRT 0154005.DRT 015403.5DRT 0154.375DRT 0154.062DR 0154.400DR 015406.3DR 015406.3DR 0154004.DRT 0154.375DRT 0154.375DRT 0154.062DR 0154.062DR 0154.800DR 015406.3DR 015401.6DR 154.500T 154.125 0154003.DRT 015402.5DRT 0154.125DR 015402.5DR 154.750T 15402.5T 0154007.DR 0154.500DR 15401.5T 0154.250DR 0154008.DR 0154003.DR 0154003.DR 015401.5DRT 01541.25DR 015403.5DRT 015403.5DRT 0154003.DRT 0154010.DR 154001.DR 0154001.DR 0154005.DRT 015403.DRT 015403.5DRT 015403.5DRT 0154003.DRT 015403.5DRT 0154003.DRT 015403.5DRT 0154003.DRT 0154000.DRL 0154.315DRL 0154.315DRL 0154.315DRL 0154.315DRL 0154.315DRL 0154.315DRL 0154.315DRL 0154.315DRL