



USB-C POWER AND SERIAL

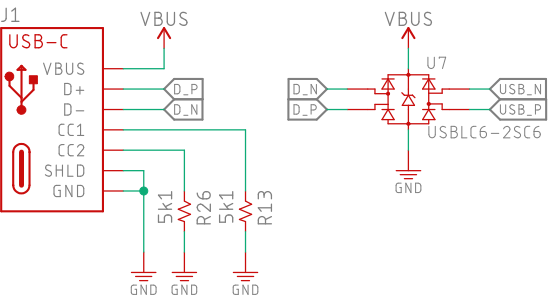


USB-TO-SERIAL CONVERTER

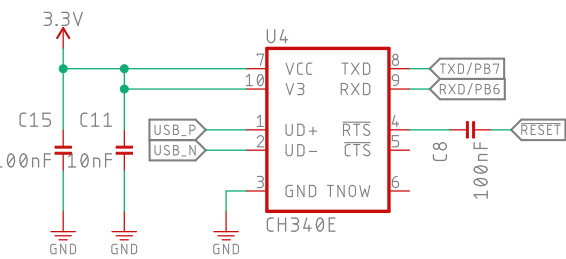


POWER SELECT AND 3.3V LDO REGULATOR


VIN: 6V Max

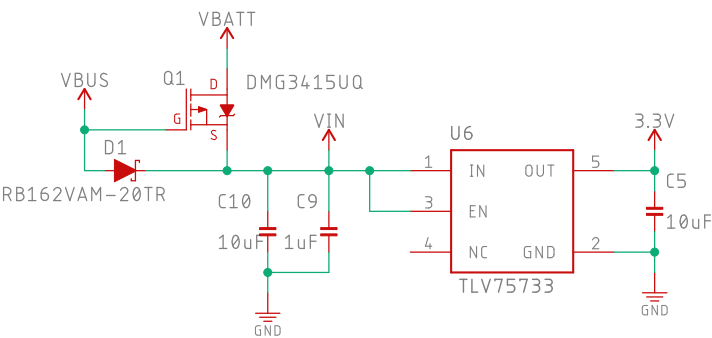


LIPO CHARGER AND CHARGING LED

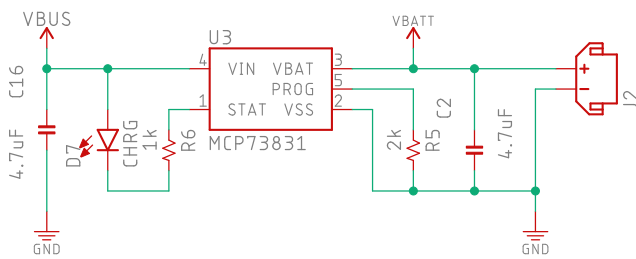

SEED WIO-E5 LORA MCU

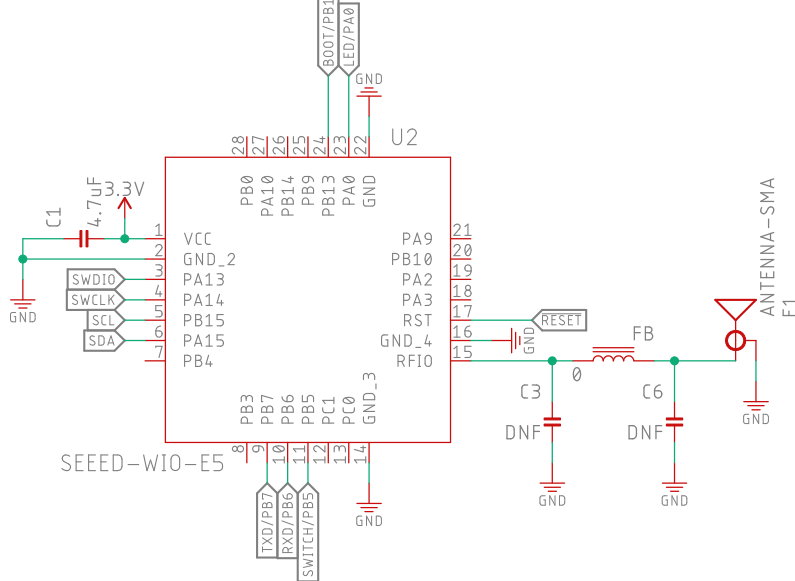


GPS UBLOX SAM-M10Q

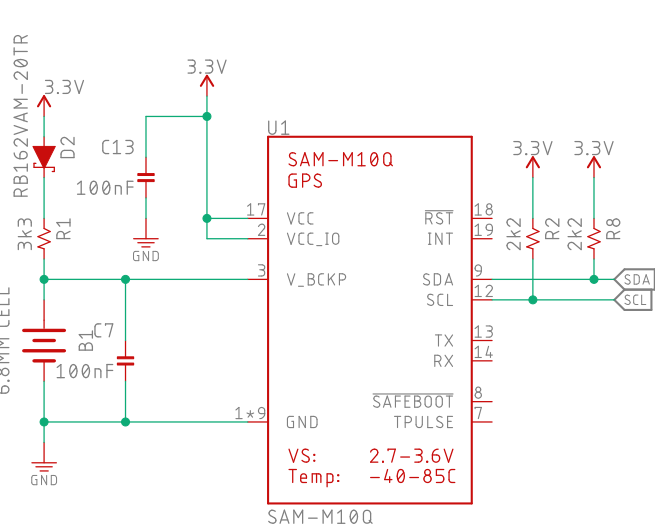


BAROMETER MS5611


Barometer and Temperature: MS5611  
Communication: I2C 0  
Default I2C address for this board is 0x77.  
PS High for I2C

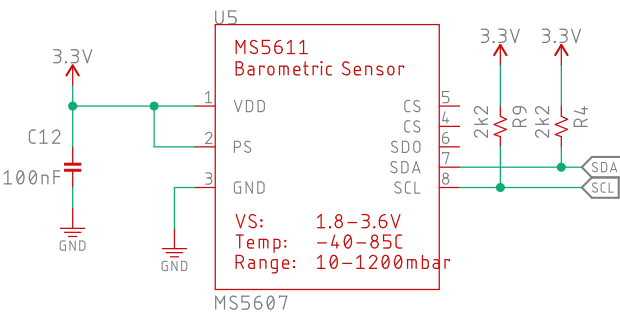

BOOT AND RESET SWITCHES

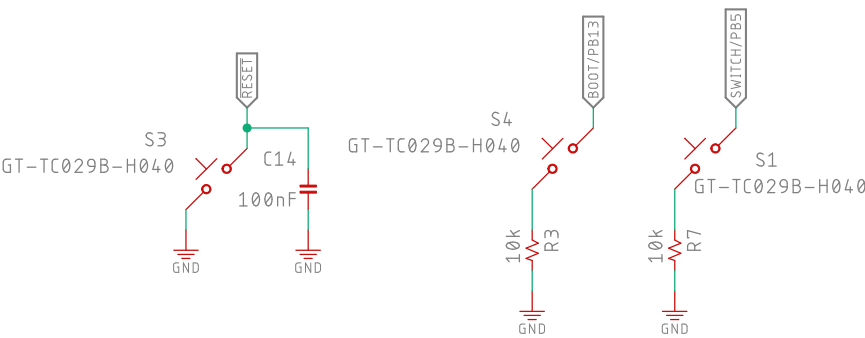

POWER AND GPIO LED STATUS



DEBUG HEADER

