


The POTENC PCB is a breakout board for the POTENC assembly.

The RJ50 (10p10c) connectors allow the user to only plug the CUI Encoder and to use a RJ12 (6p6c) or a RJ45 (8p8c).

The POT is routed to the first and last pair which requires a RJ48/RJ50




board

File: board.kicad_sch

RJ50 (6510-0104-05)

Made by Philippe Michaud		
RobotiqueUdeS		
Sheet: /		
File: POTENC.kicad_sch		
Title: POTENC		
Size: A5	Date: 2025-02-03	Rev: REV0
KiCad E.D.A. 8.0.8		Id: 1/2

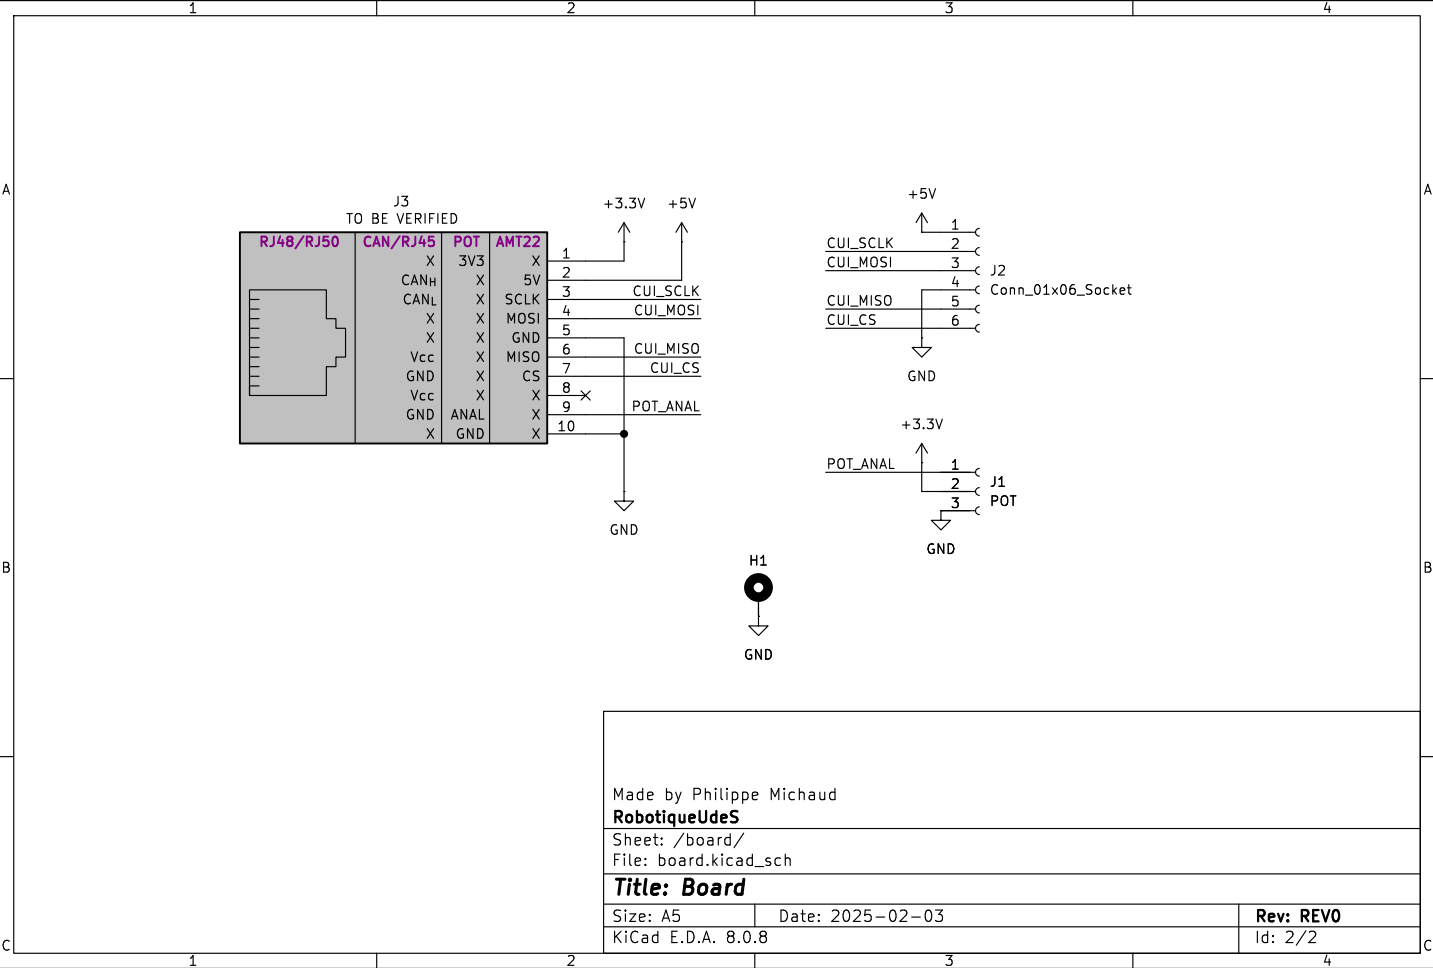

Made by Philippe Michaud
RobotiqueUdeS

Sheet: /board/
File: board.kicad_sch

Title: Board

Size: A5	Date: 2025-02-03	Rev: REV0
KiCad E.D.A. 8.0.8		Id: 2/2