



INPUT FROM HIGH AMP PCB








VOLTAGE DIVIDER FROM 24V TO 3.3V

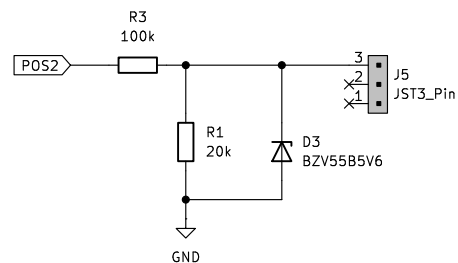

Voltage range of lipo 6s : 28 – 25.2 V
Safe range of chip input voltage : 2.1 – 5.3 V
Range obtained from voltage divider : 3.0 – 4.2 V
Zener diode breakdown voltage : 5.6 V

E_STOP, SELECTOR AND DEL

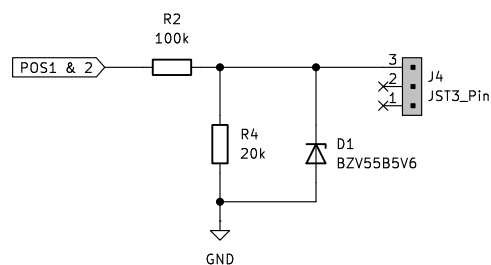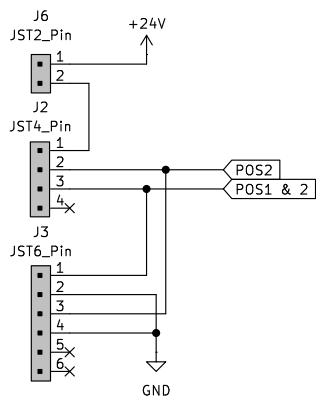

Sheet: /
File: Selector.kicad_sch

Title:

Size: A4
KiCad E.D.A. 8.0.8

Date:

Rev:
Id: 1/1