M28C16A
M28C17A

16 Kbit (2Kb x8) Parallel EEPROM

- FAST ACCESS TIME:
  - 150ns at 5V
  - 250ns at 3V
- SINGLE SUPPLY VOLTAGE:
  - 5V ± 10% for M28C16A and M28C17A
  - 2.7V to 3.6V for M28C16-xxW
- LOW POWER CONSUMPTION
- FAST WRITE CYCLE
  - 32 Bytes Page Write Operation
  - Byte or Page Write Cycle: 5ms
- ENHANCED END OF WRITE DETECTION
  - Ready/Busy Open Drain Output
  - Data Polling
  - Toggle Bit
- PAGE LOAD TIMER STATUS BIT
- HIGH RELIABILITY SINGLE POLYSILICON, CMOS TECHNOLOGY
  - Endurance >100,000 Erase/Write Cycles
  - Data Retention >40 Years
- JEDEC APPROVED BYTEWIDE PIN OUT

PDIP28 (BS)　　　PLCC32 (KA)

SO28 (MS)　　　TSOP28 (NS)
300 mils　　　8 x13.4mm

DESCRIPTION

The M28C16A and M28C17A are 2K x8 low power Parallel EEPROM fabricated with STMicroelectronics proprietary single polysilicon CMOS technology. The device offers fast access time with low power dissipation and requires a 5V or 3V power supply.

Table 1. Signal Names

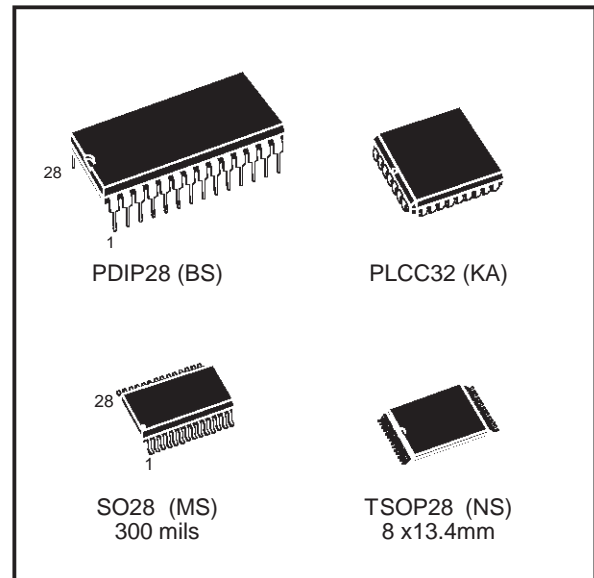| A0-A10	Address Input
DQ0-DQ7	Data Input / Output
$\overline{W}$	Write Enable
$\overline{E}$	Chip Enable
$\overline{G}$	Output Enable
$R\overline{B}$	Ready / Busy
V_{CC}	Supply Voltage
V_{SS}	Ground

Figure 1. Logic Diagram
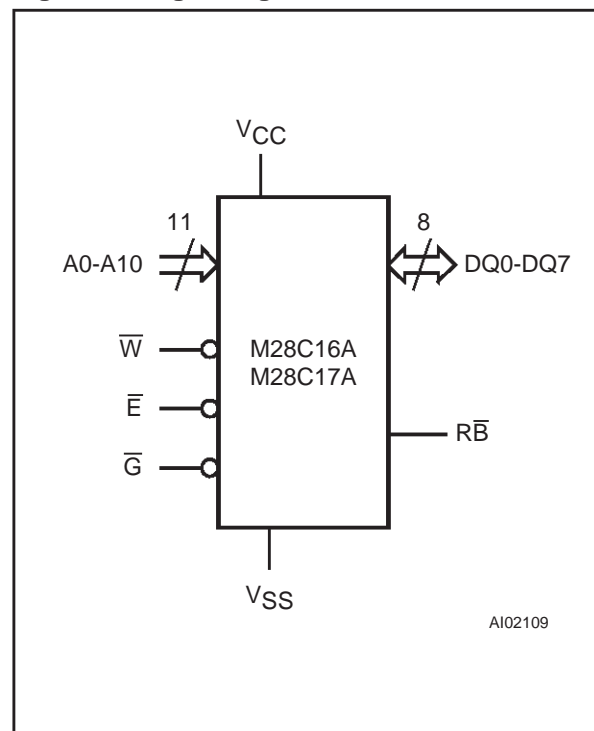
Figure 2A. DIP Pin Connections


```
      RB̄ ⟦ 1        28 ⟧ V_CC
       NC ⟦ 2        27 ⟧ W̄
       A7 ⟦ 3        26 ⟧ DU
       A6 ⟦ 4        25 ⟧ A8
       A5 ⟦ 5        24 ⟧ A9
       A4 ⟦ 6        23 ⟧ NC
       A3 ⟦ 7   M28C17A  22 ⟧ Ḡ
       A2 ⟦ 8        21 ⟧ A10
       A1 ⟦ 9        20 ⟧ Ē
       A0 ⟦ 10       19 ⟧ DQ7
      DQ0 ⟦ 11       18 ⟧ DQ6
      DQ1 ⟦ 12       17 ⟧ DQ5
      DQ2 ⟦ 13       16 ⟧ DQ4
      V_SS ⟦ 14      15 ⟧ DQ3
                      AI02110
```
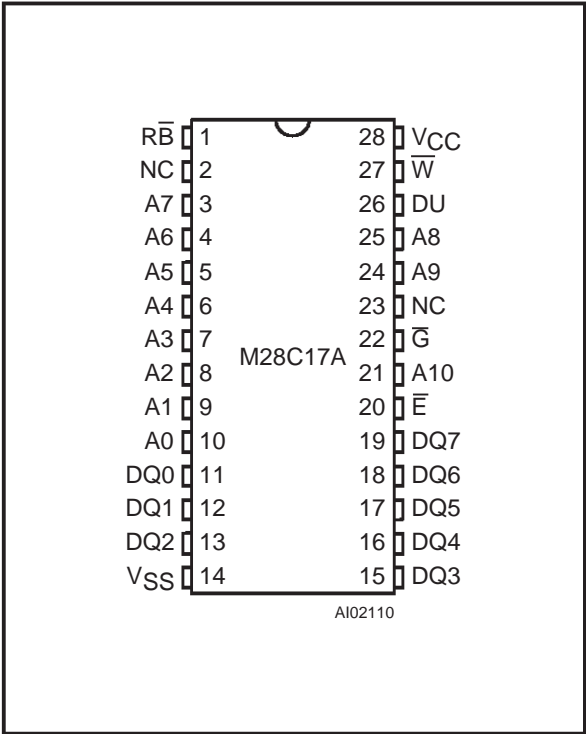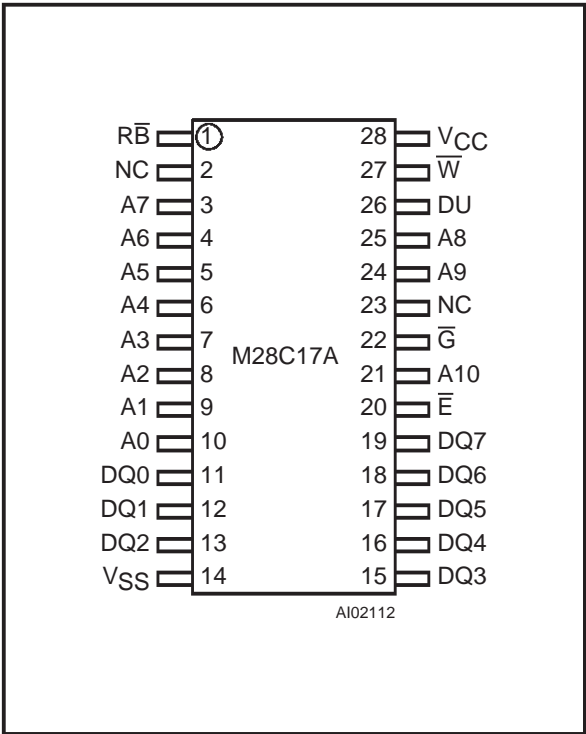
Warning: NC = Not Connected, DU = Don't Use.

Figure 2B. LCC Pin Connections


```
           A7  NC  RB̄ or NC^(1)  DU  V_CC  W̄  DU

      A6 ⟧                              ⟦ A8
      A5 ⟧                              ⟦ A9
      A4 ⟧                              ⟦ NC
      A3 ⟧                              ⟦ NC
      A2 ⟧ 9      M28C16A       25      ⟦ Ḡ
      A1 ⟧        M28C17A               ⟦ A10
      A0 ⟧                              ⟦ Ē
      NC ⟧                              ⟦ DQ7
     DQ0 ⟧            17                ⟦ DQ6

           DQ1 DQ2 V_SS NC DQ3 DQ4 DQ5
                                  AI02111
```
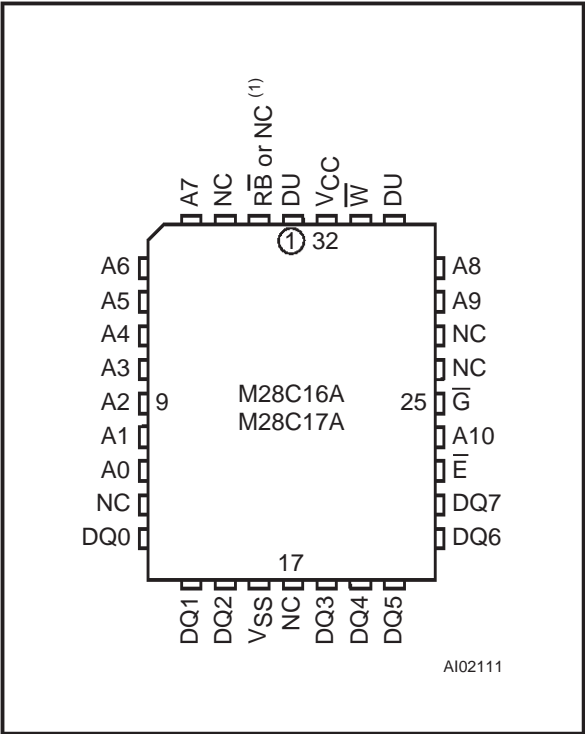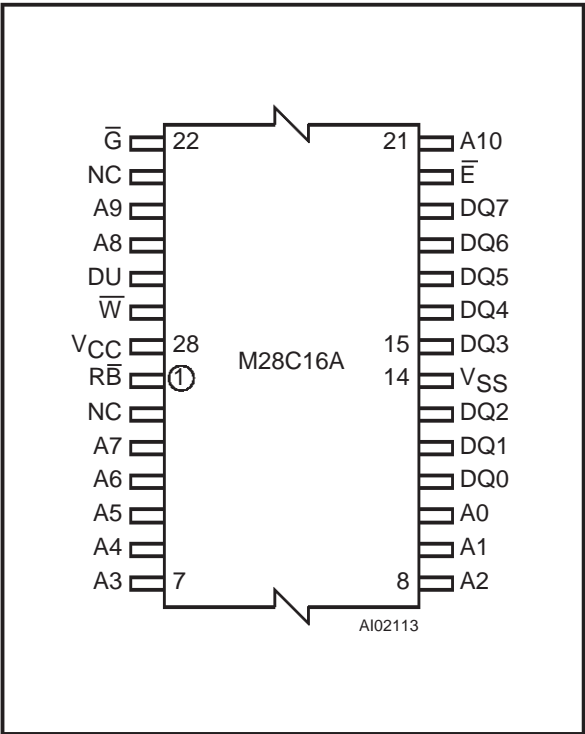
Warning: NC = Not Connected, DU = Don't Use.
Note: 1. Pin 2 is either RB̄ for M28C17A or NC for M28C16A.

Figure 2C. SO Pin Connections


```
      RB̄ ⟦ ① 1      28 ⟧ V_CC
       NC ⟦ 2        27 ⟧ W̄
       A7 ⟦ 3        26 ⟧ DU
       A6 ⟦ 4        25 ⟧ A8
       A5 ⟦ 5        24 ⟧ A9
       A4 ⟦ 6        23 ⟧ NC
       A3 ⟦ 7   M28C17A  22 ⟧ Ḡ
       A2 ⟦ 8        21 ⟧ A10
       A1 ⟦ 9        20 ⟧ Ē
       A0 ⟦ 10       19 ⟧ DQ7
      DQ0 ⟦ 11       18 ⟧ DQ6
      DQ1 ⟦ 12       17 ⟧ DQ5
      DQ2 ⟦ 13       16 ⟧ DQ4
      V_SS ⟦ 14      15 ⟧ DQ3
                      AI02112
```

Warning: NC = Not Connected, DU = Don't Use.

Figure 2D. TSOP Pin Connections


```
       Ḡ ⟦ 22      21 ⟧ A10
       NC ⟦        ⟧ Ē
       A9 ⟦        ⟧ DQ7
       A8 ⟦        ⟧ DQ6
       DU ⟦        ⟧ DQ5
       W̄ ⟦         ⟧ DQ4
      V_CC ⟦ 28    15 ⟧ DQ3
      RB̄ ⟦ ①  M28C16A  14 ⟧ V_SS
       NC ⟦        ⟧ DQ2
       A7 ⟦        ⟧ DQ1
       A6 ⟦        ⟧ DQ0
       A5 ⟦        ⟧ A0
       A4 ⟦        ⟧ A1
       A3 ⟦ 7      8 ⟧ A2
                      AI02113
```

Warning: NC = Not Connected, DU = Don't Use.

Table 2. Absolute Maximum Ratings [1]

Symbol	Parameter	Value	Unit
T_A	Ambient Operating Temperature [2]	− 40 to 85	°C
T_{STG}	Storage Temperature Range	− 65 to 150	°C
V_{CC}	Supply Voltage	− 0.3 to 6.5	V
V_{IO}	Input/Output Voltage	− 0.3 to V_{CC} +0.6	V
V_I	Input Voltage	− 0.3 to 6.5	V
V_{ESD}	Electrostatic Discharge Voltage (Human Body model)	3000	V

Notes: 1. Except for the rating "Operating Temperature Range", stresses above those listed in the Table "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the Operating sections of this specification is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability. Refer also to the STMicroelectronics SURE Program and other relevant quality documents.

2. Depends on range.

Table 3. Operating Modes

Mode	$\overline{E}$	$\overline{G}$	$\overline{W}$	DQ0 - DQ7
Read	V_{IL}	V_{IL}	V_{IH}	Data Out
Write	V_{IL}	V_{IH}	V_{IL}	Data In
Standby / Write Inhibit	V_{IH}	X	X	Hi-Z
Write Inhibit	X	X	V_{IH}	Data Out or Hi-Z
Write Inhibit	X	V_{IL}	X	Data Out or Hi-Z
Output Disable	X	V_{IH}	X	Hi-Z

Note: X = V_{IH} or V_{IL}

DESCRIPTION (cont'd)

The circuit has been designed to offer a flexible microcontroller interface featuring both hardware and software handshaking mode with Ready/Busy, Data Polling and Toggle Bit. The M28C16A/17A supports 32 byte page write operation.

PIN DESCRITPION

Addresses (A0-A10). The address inputs select an 8-bit memory location during a read or write operation.

Chip Enable ($\overline{E}$). The chip enable input must be low to enable all read/write operations. When Chip Enable is high, power consumption is reduced.

Output Enable ($\overline{G}$). The Output Enable input controls the data output buffers and is used to initiate read operations.

Data In/ Out (DQ0 - DQ7). Data is written to or read from the M28C16A/17A through the I/O pins.

Write Enable ($\overline{W}$). The Write Enable input controls the writing of data to the M28C16A/17A.

Ready/Busy (R$\overline{B}$). Ready/Busy is an open drain output that can be used to detect the end of the internal write cycle. Ready/Busy is available for the M28C17A in PDIP, PLCC and SO packages, and for the M28C16A in TSOP only.
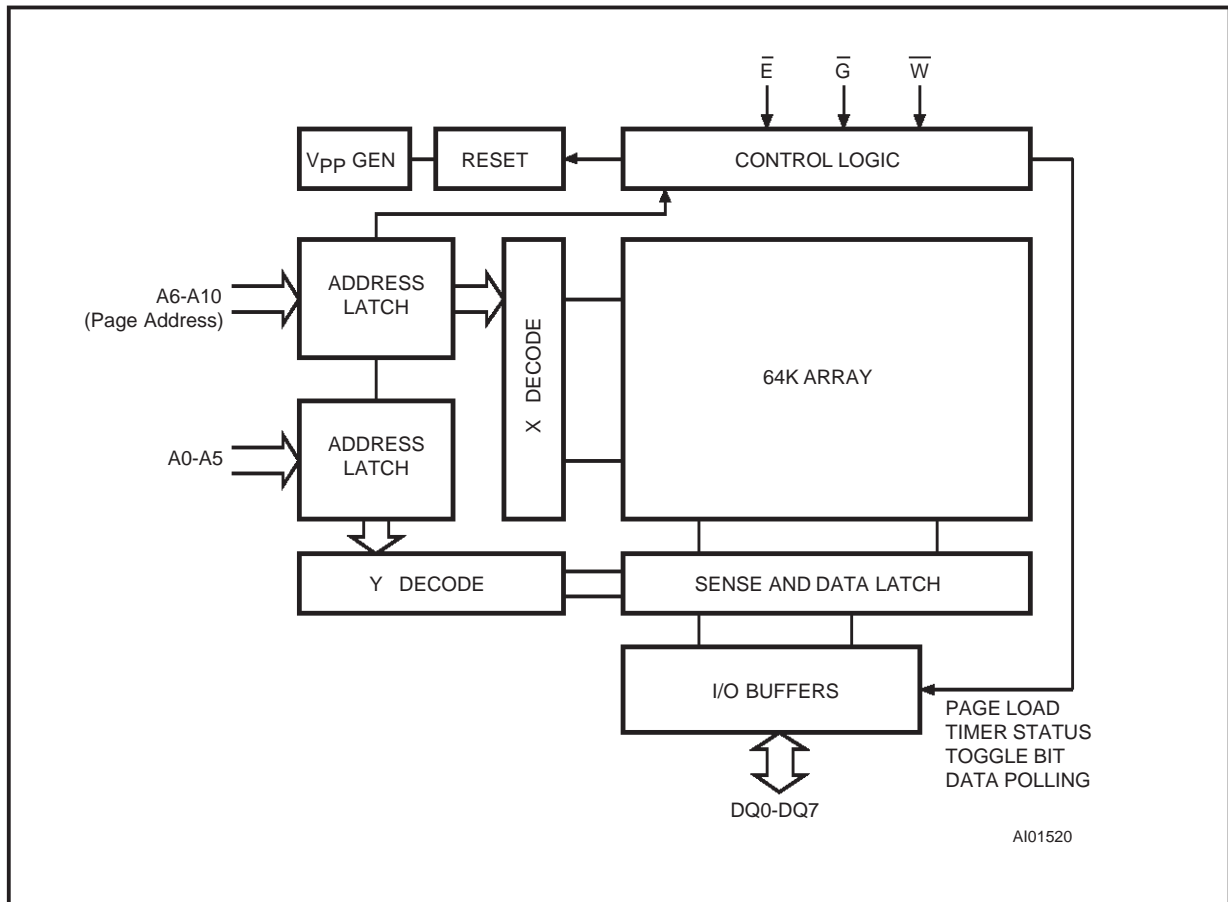
OPERATION

In order to prevent data corruption and inadvertent write operations during power-up, a Power On Reset (POR) circuit resets all internal programming cicuitry. Access to the memory in write mode is allowed after a power-up as specified in Table 7.

Read

The M28C16A/17A is accessed like a static RAM. When $\overline{E}$ and $\overline{G}$ are low with $\overline{W}$ high, the data addressed is presented on the I/O pins. The I/O pins are high impedance when either $\overline{G}$ or $\overline{E}$ is high.

Figure 3. Block Diagram

OPERATION (cont'd)

Write

Write operations are initiated when both $\overline{W}$ and $\overline{E}$ are low and $\overline{G}$ is high. The M28C16A/17A supports both $\overline{E}$ and $\overline{W}$ controlled write cycles. The Address is latched by the falling edge of $\overline{E}$ or $\overline{W}$ which ever occurs last and the Data on the rising edge of $\overline{E}$ or $\overline{W}$ which ever occurs first. Once initiated the write operation is internally timed until completion.

Page Write

Page write allows up to 32 bytes to be consecutively latched into the memory prior to initiating a

Figure 4. Status Bit Assignment

DQ7	DQ6	DQ5	DQ4	DQ3	DQ2	DQ1	DQ0
DP	TB	PLTS	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z

DP = Data Polling
TB = Toggle Bit
PLTS = Page Load Timer Status

programming cycle. All bytes must be located in a single page address, that is A5 - A10 must be the same for all bytes. The page write can be initiated during any byte write operation.

Following the first byte write instruction the host may send another address and data up to a maximum of t_{WHWH} after the rising edge of $\overline{E}$ or $\overline{W}$ which ever occurs first. If a transition of $\overline{E}$ or $\overline{W}$ is not detected within t_{WHWH}, the internal programming cycle will start.

Microcontroller Control Interface

The M28C16A/17A provides two write operation status bits and one status pin that can be used to minimize the system write cycle. These signals are available on the I/O port bits DQ7 or DQ6 of the memory during programming cycle only, or as the $R\overline{B}$ signal on a separate pin.

Data Polling bit (DQ7). During the internal write cycle, any attempt to read the last byte written will produce on DQ7 the complementary value of the previously latched bit. Once the write cycle is finished the true logic value appears on DQ7 in the read cycle.
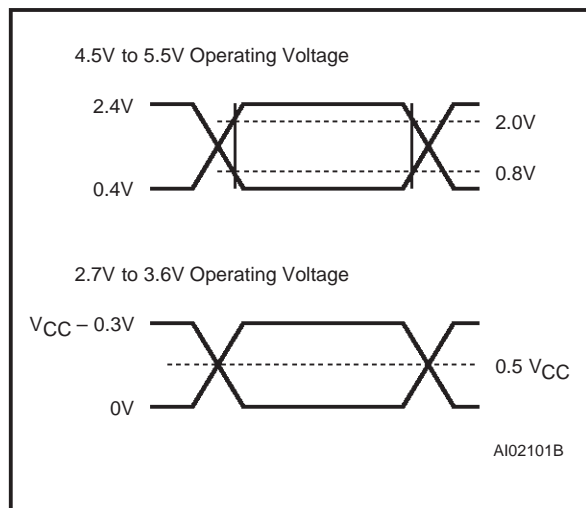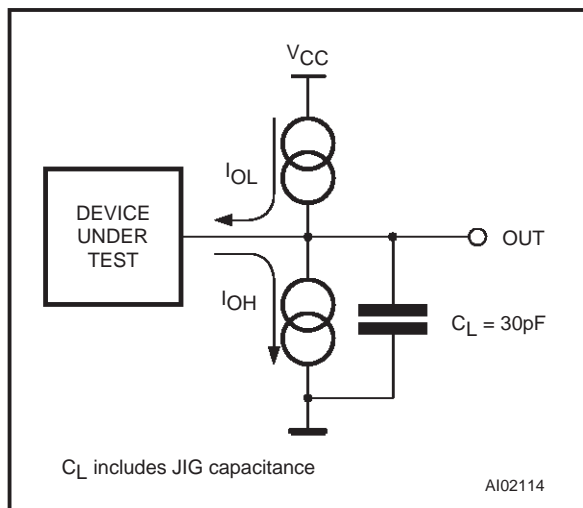
Table 4. AC Measurement Conditions

Input Rise and Fall Times	$\leq$ 20ns
Input Pulse Voltages	0.4V to 2.4V
Input and Output Timing Ref. Voltages	0.8V to 2.0V

Note that Output Hi-Z is defined as the point where data is no longer driven.

Figure 5. AC Testing Input Output Waveforms

4.5V to 5.5V Operating Voltage

2.7V to 3.6V Operating Voltage

AI02101B

Figure 6. AC Testing Equivalent Load Circuit

C_L includes JIG capacitance

AI02114

Table 5. Capacitance [1]
($T_A = 25$ °C, f = 1 MHz)

Symbol	Parameter	Test Condition	Min	Max	Unit
C_{IN}	Input Capacitance	$V_{IN} = 0V$		6	pF
C_{OUT}	Output Capacitance	$V_{OUT} = 0V$		12	pF

Note: 1. Sampled only, not 100% tested.

Table 6. Read Mode DC Characteristics for M28C16A and M28C17A
($T_A = -40$ to 85°C, V_{CC} = 4.5V to 5.5V)

Symbol	Parameter	Test Condition	Min	Max	Unit
I_{LI}	Input Leakage Current	$0V \leq V_{IN} \leq V_{CC}$		10	µA
I_{LO}	Output Leakage Current	$0V \leq V_{IN} \leq V_{CC}$		10	µA
I_{CC} [1]	Supply Current (TTL and CMOS inputs)	$\overline{E} = V_{IL}, \overline{G} = V_{IL}$, f = 5MHz		25	mA
I_{CC1} [1]	Supply Current (Standby) TTL	$\overline{E} = V_{IH}$		1	mA
I_{CC2} [1]	Supply Current (Standby) CMOS	$\overline{E} > V_{CC} - 0.3V$		50	µA
V_{IL}	Input Low Voltage		−0.3	0.8	V
V_{IH}	Input High Voltage		2	$V_{CC} + 0.5$	V
V_{OL}	Output Low Voltage	$I_{OL} = 2.1$ mA		0.4	V
V_{OH}	Output High Voltage	$I_{OH} = -400$ µA	2.4		V

Note: 1. All I/O's open circuit.

Table 7. Power Up Timing for M28C16A and M28C17A [1]

(T_A = −40 to 85°C, V_{CC} = 4.5V to 5.5V)

Symbol	Parameter	Min	Max	Unit
t_{PUR}	Time Delay to Read Operation		1	µs
t_{PUW}	Time Delay to Write Operation (once $V_{CC} \geq V_{WI}$)		10	ms
V_{WI}	Write Inhibit Threshold	1.5	2.5	V

Note: 1. Sampled only, not 100% tested.

Table 8. Read Mode DC Characteristics for M28C16A-W

(T_A = −40 to 85°C, V_{CC} = 2.7V to 3.6V)

Symbol	Parameter	Test Condition	Min	Max	Unit
I_{LI}	Input Leakage Current	$0V \leq V_{IN} \leq V_{CC}$		10	µA
I_{LO}	Output Leakage Current	$0V \leq V_{IN} \leq V_{CC}$		10	µA
I_{CC} [1]	Supply Current (TTL and CMOS inputs)	$\overline{E} = V_{IL}, \overline{G} = V_{IL}$, f = 5 MHz		15	mA
I_{CC2} [1]	Supply Current (Standby) CMOS	$\overline{E} > V_{CC} -0.3V$		20	µA
V_{IL}	Input Low Voltage		−0.3	0.6	V
V_{IH}	Input High Voltage		2	$V_{CC} + 0.5$	V
V_{OL}	Output Low Voltage	I_{OL} = 2.1 mA		0.2 V_{CC}	V
V_{OH}	Output High Voltage	I_{OH} = −400 µA	0.8 V_{CC}		V

Note: 1. All I/O's open circuit.

Table 9. Power Up Timing for M28C16A-W [1]

(T_A = −40 to 85°C, V_{CC} = 2.7V to 3.6V)

Symbol	Parameter	Min	Max	Unit
t_{PUR}	Time Delay to Read Operation		1	µs
t_{PUW}	Time Delay to Write Operation (once $V_{CC} \geq V_{WI}$)		10	ms
V_{WI}	Write Inhibit Threshold	1.5	2.5	V

Note: 1. Sampled only, not 100% tested.

Table 10. Read Mode AC Characteristics for M28C16A and M28C17A
(T_A = −40 to 85°C, V_{CC} = 4.5V to 5.5V)

| Symbol	Alt	Parameter	Test Condition	M28C16A / M28C17A				Unit
				-15		-20		
				min	max	min	max	
t_{AVQV}	t_{ACC}	Address Valid to Output Valid	$\overline{E}$ = V_{IL}, $\overline{G}$ = V_{IL}		150		200	ns
t_{ELQV}	t_{CE}	Chip Enable Low to Output Valid	G = V_{IL}		150		200	ns
t_{GLQV}	t_{OE}	Output Enable Low to Output Valid	$\overline{E}$ = V_{IL}		70		80	ns
t_{EHQZ} [1]	t_{DF}	Chip Enable High to Output Hi-Z	$\overline{G}$ = V_{IL}	0	50	0	60	ns
t_{GHQZ} [1]	t_{DF}	Output Enable High to Output Hi-Z	$\overline{E}$ = V_{IL}	0	50	0	60	ns
t_{AXQX}	t_{OH}	Address Transition to Output Transition	$\overline{E}$ = V_{IL}, $\overline{G}$ = V_{IL}	0		0		ns

Note: 1. Output Hi-Z is defined as the point at which data is no longer driven.

Table 11. Read Mode AC Characteristics for M28C16-W
(T_A = −40 to 85°C, V_{CC} = 2.7V to 3.6V)

Symbol	Alt	Parameter	Test Condition	M28C16A / M28C17A				Unit
				-25		-30		
				min	max	min	max	
t_{AVQV}	t_{ACC}	Address Valid to Output Valid	$\overline{E}$ = V_{IL}, $\overline{G}$ = V_{IL}		250		300	ns
t_{ELQV}	t_{CE}	Chip Enable Low to Output Valid	G = V_{IL}		250		300	ns
t_{GLQV}	t_{OE}	Output Enable Low to Output Valid	$\overline{E}$ = V_{IL}		100		100	ns
t_{EHQZ} [1]	t_{DF}	Chip Enable High to Output Hi-Z	$\overline{G}$ = V_{IL}	0	70	0	80	ns
t_{GHQZ} [1]	t_{DF}	Output Enable High to Output Hi-Z	$\overline{E}$ = V_{IL}	0	70	0	80	ns
t_{AXQX}	t_{OH}	Address Transition to Output Transition	$\overline{E}$ = V_{IL}, $\overline{G}$ = V_{IL}	0		0		ns

Note: 1. Output Hi-Z is defined as the point at which data is no longer driven.

Figure 7. Read Mode AC Waveforms
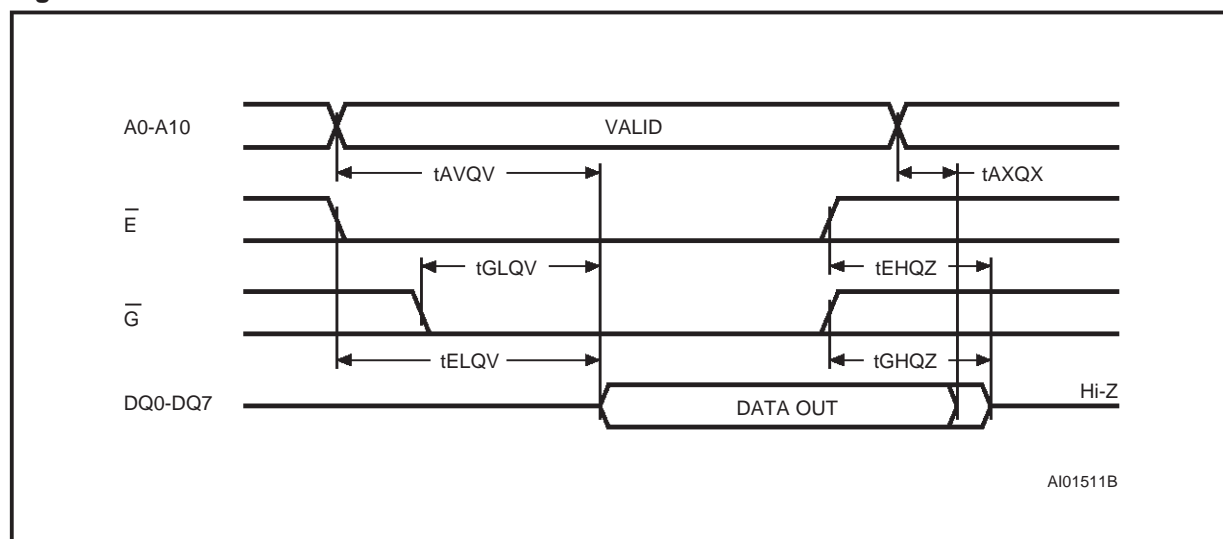
Note: Write Enable ($\overline{W}$) = High

Toggle bit (DQ6). The M28C16A/17A offers another way for determining when the internal write cycle is completed. During the internal Erase/Write cycle, DQ6 will toggle from "0" to "1" and "1" to "0" (the first read value is "0") on subsequent attempts to read any address in the memory. When the internal cycle is completed the toggling will stop and the device will be accessible for a new Read or Write operation.

Page Load Timer Status bit (DQ5). In the Page Write mode data may be latched by $\overline{E}$ or $\overline{W}$ up to t_{WHWH} after the previous byte. Up to 32 bytes may be input. The Data output (DQ5) indicates the status of the internal Page Load Timer. DQ5 may be read by asserting Output Enable Low (t_{PLTS}). DQ5 Low indicates the timer is running, High

Table 12. Write Mode AC Characteristics for M28C16A and M28C17A
(T_A = –40 to 85°C, V_{CC} = 4.5V to 5.5V)

Symbol	Alt	Parameter	Test Condition	Min	Max	Unit
t_{AVWL}	t_{AS}	Address Valid to Write Enable Low	$\overline{E} = V_{IL}$, $\overline{G} = V_{IH}$	0		ns
t_{AVEL}	t_{AS}	Address Valid to Chip Enable Low	$\overline{G} = V_{IH}$, $\overline{W} = V_{IL}$	0		ns
t_{ELWL}	t_{CES}	Chip Enable Low to Write Enable Low	$\overline{G} = V_{IH}$	0		ns
t_{GHWL}	t_{OES}	Output Enable High to Write Enable Low	$\overline{E} = V_{IL}$	0		ns
t_{GHEL}	t_{OES}	Output Enable High to Chip Enable Low	$\overline{W} = V_{IL}$	0		ns
t_{WLEL}	t_{WES}	Write Enable Low to Chip Enable Low	$\overline{G} = V_{IH}$	0		ns
t_{WLAX}	t_{AH}	Write Enable Low to Address Transition		100		ns
t_{ELAX}	t_{AH}	Chip Enable Low to Address Transition		100		ns
t_{WLDV}	t_{DV}	Write Enable Low to Input Valid	$\overline{E} = V_{IL}$, $\overline{G} = V_{IH}$		1	µs
t_{ELDV}	t_{DV}	Chip Enable Low to Input Valid	$\overline{G} = V_{IH}$, $\overline{W} = V_{IL}$		1	µs
t_{ELEH}	t_{WP}	Chip Enable Low to Chip Enable High		100		ns
t_{WHEH}	t_{CEH}	Write Enable High to Chip Enable High		0		ns
t_{WHGL}	t_{OEH}	Write Enable High to Output Enable Low		0		ns
t_{EHGL}	t_{OEH}	Chip Enable High to Output Enable Low		0		ns
t_{EHWH}	t_{WEH}	Chip Enable High to Write Enable High		0		ns
t_{WHDX}	t_{DH}	Write Enable High to Input Transition		0		ns
t_{EHDX}	t_{DH}	Chip Enable High to Input Transition		0		ns
t_{WHWL}	t_{WPH}	Write Enable High to Write Enable Low		200		ns
t_{WLWH}	t_{WP}	Write Enable Low to Write Enable High		100		ns
t_{WHWH}	t_{BLC}	Byte Load Repeat Cycle Time		0.2	30	µs
t_{WHRH}	t_{WC}	Write Cycle Time			5	ms
t_{WHRL}	t_{DB}	Write Enable High to Ready/Busy Low	Note 1		100	ns
t_{EHRL}	t_{DB}	Chip Enable High to Ready/Busy Low	Note 1		100	ns
t_{DVWH}	t_{DS}	Data Valid before Write Enable High		50		ns
t_{DVEH}	t_{DS}	Data Valid before Chip Enable High		50		ns

Note: 1. With a 3.3 kΩ external pull-up resistor.

Table 13. Write Mode AC Characteristics for M28C16-W
(T_A = –40 to 85°C, V_{CC} = 2.7V to 3.6V)

Symbol	Alt	Parameter	Test Condition	Min	Max	Unit
t_{AVWL}	t_{AS}	Address Valid to Write Enable Low	$\overline{E} = V_{IL}$, $\overline{G} = V_{IH}$	0		ns
t_{AVEL}	t_{AS}	Address Valid to Chip Enable Low	$\overline{G} = V_{IH}$, $\overline{W} = V_{IL}$	0		ns
t_{ELWL}	t_{CES}	Chip Enable Low to Write Enable Low	$\overline{G} = V_{IH}$	0		ns
t_{GHWL}	t_{OES}	Output Enable High to Write Enable Low	$\overline{E} = V_{IL}$	0		ns
t_{GHEL}	t_{OES}	Output Enable High to Chip Enable Low	$\overline{W} = V_{IL}$	0		ns
t_{WLEL}	t_{WES}	Write Enable Low to Chip Enable Low	$\overline{G} = V_{IH}$	0		ns
t_{WLAX}	t_{AH}	Write Enable Low to Address Transition		200		ns
t_{ELAX}	t_{AH}	Chip Enable Low to Address Transition		200		ns
t_{WLDV}	t_{DV}	Write Enable Low to Input Valid	$\overline{E} = V_{IL}$, $\overline{G} = V_{IH}$		1	µs
t_{ELDV}	t_{DV}	Chip Enable Low to Input Valid	$\overline{G} = V_{IH}$, $\overline{W} = V_{IL}$		1	µs
t_{ELEH}	t_{WP}	Chip Enable Low to Chip Enable High		200		ns
t_{WHEH}	t_{CEH}	Write Enable High to Chip Enable High		0		ns
t_{WHGL}	t_{OEH}	Write Enable High to Output Enable Low		0		ns
t_{EHGL}	t_{OEH}	Chip Enable High to Output Enable Low		0		ns
t_{EHWH}	t_{WEH}	Chip Enable High to Write Enable High		0		ns
t_{WHDX}	t_{DH}	Write Enable High to Input Transition		0		ns
t_{EHDX}	t_{DH}	Chip Enable High to Input Transition		0		ns
t_{WHWL}	t_{WPH}	Write Enable High to Write Enable Low		200		ns
t_{WLWH}	t_{WP}	Write Enable Low to Write Enable High		200		ns
t_{WHWH}	t_{BLC}	Byte Load Repeat Cycle Time		0.4	50	µs
t_{WHRH}	t_{WC}	Write Cycle Time			5	ms
t_{WHRL}	t_{DB}	Write Enable High to Ready/Busy Low	Note 1		250	ns
t_{EHRL}	t_{DB}	Chip Enable High to Ready/Busy Low	Note 1		250	ns
t_{DVWH}	t_{DS}	Data Valid before Write Enable High		50		ns
t_{DVEH}	t_{DS}	Data Valid before Chip Enable High		50		ns

Note: 1. With a 3.3 kΩ external pull-up resistor.

Figure 8. Write Mode AC Waveforms - Write Enable Controlled

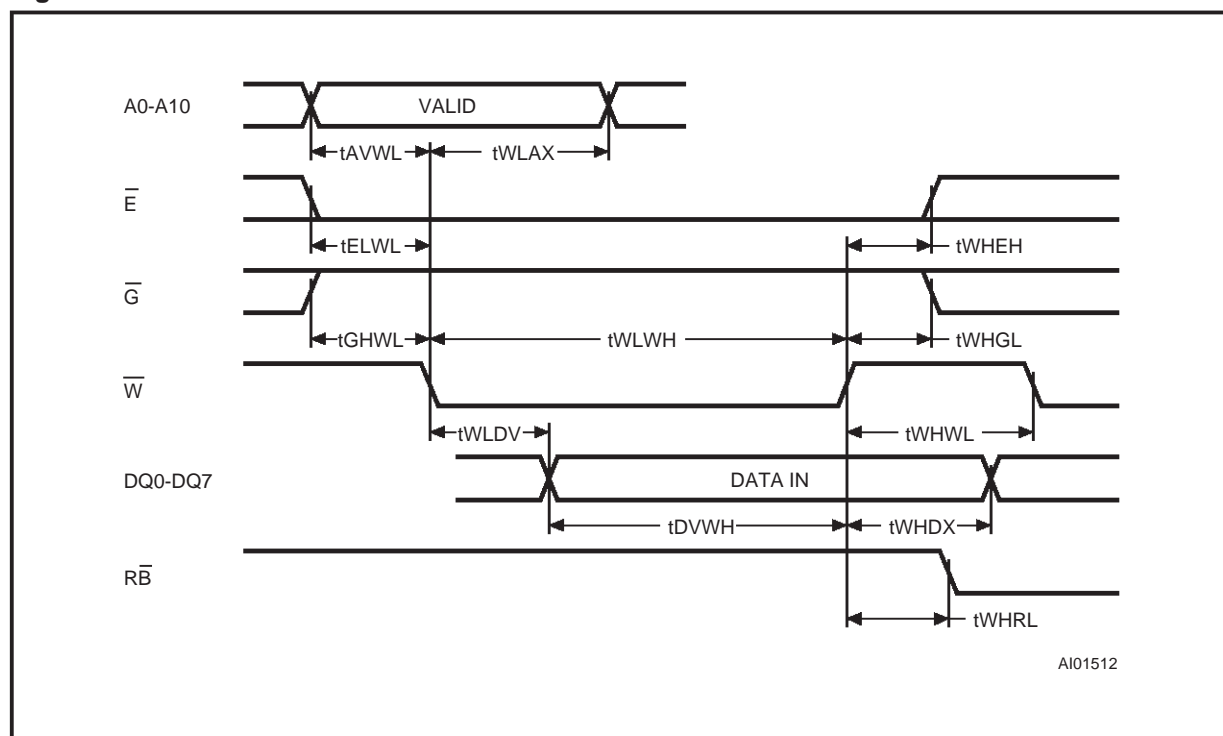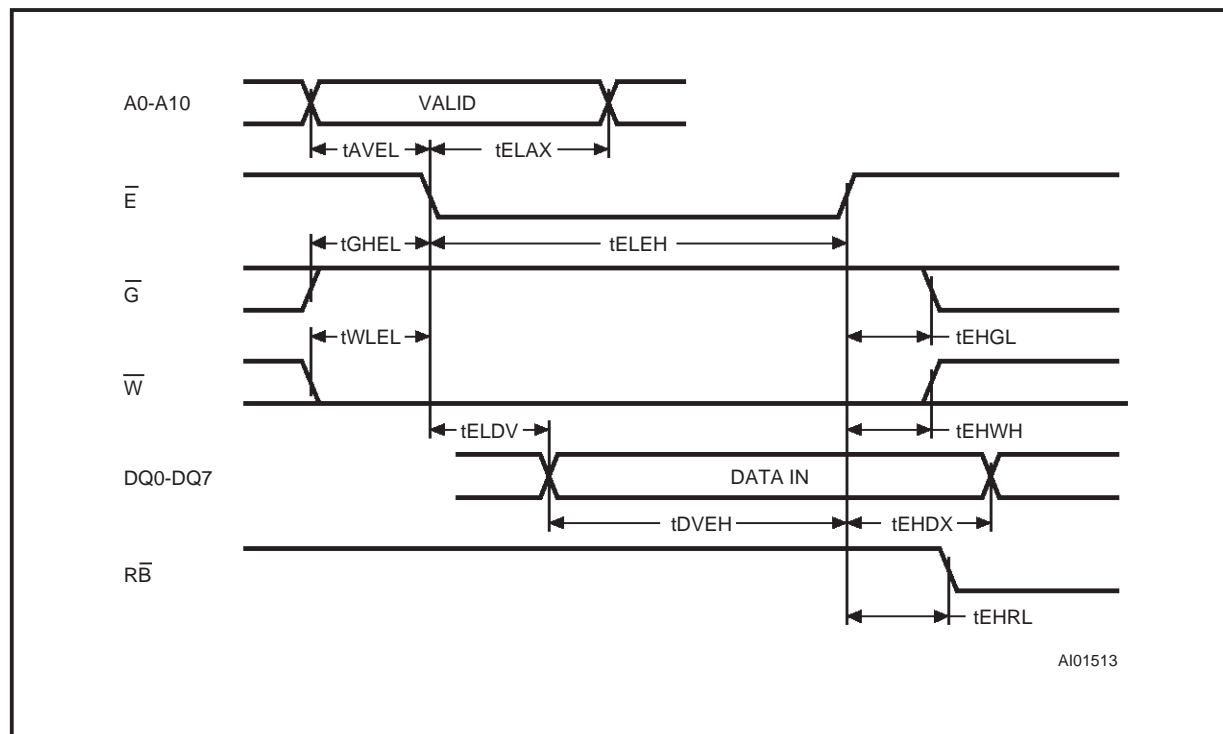**Figure 9. Write Mode AC Waveforms - Chip Enable Controlled**

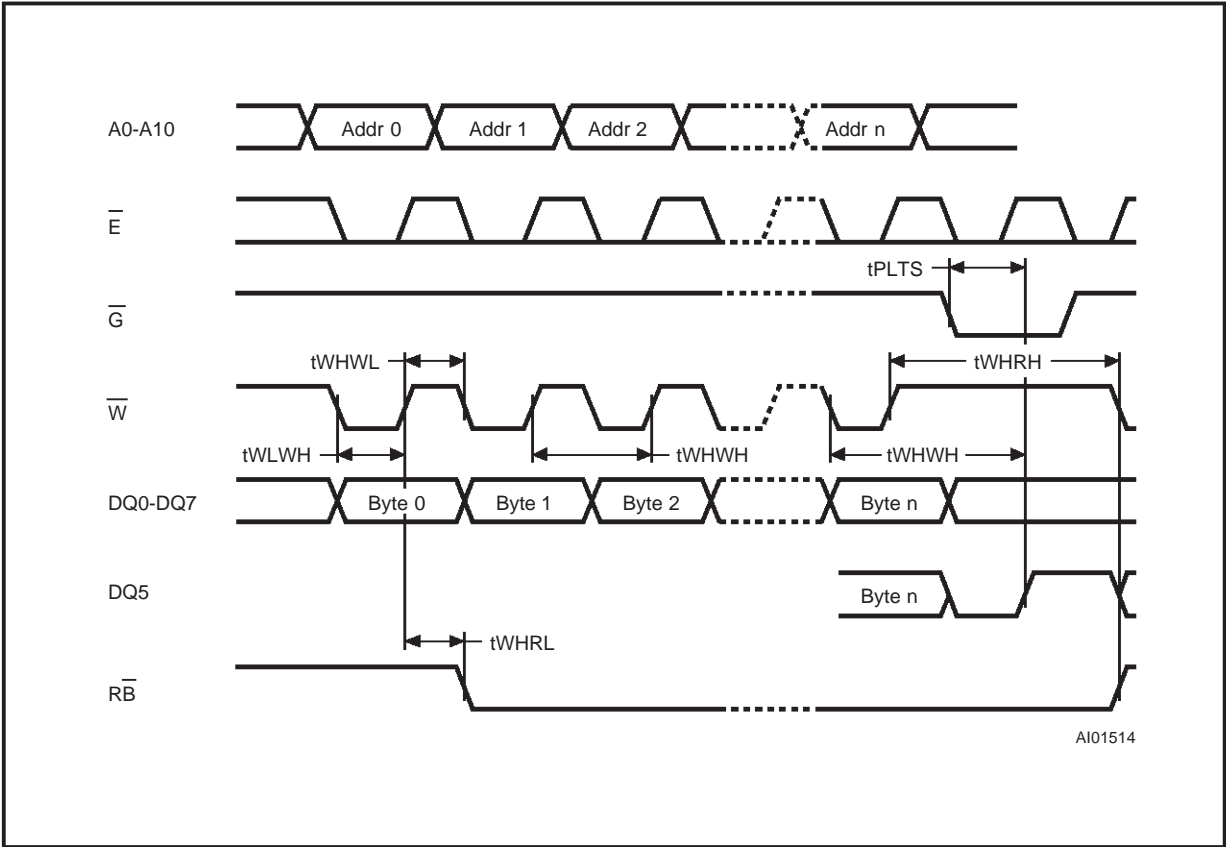**Figure 10. Page Write Mode AC Waveforms - Write Enable Controlled**

AI01514

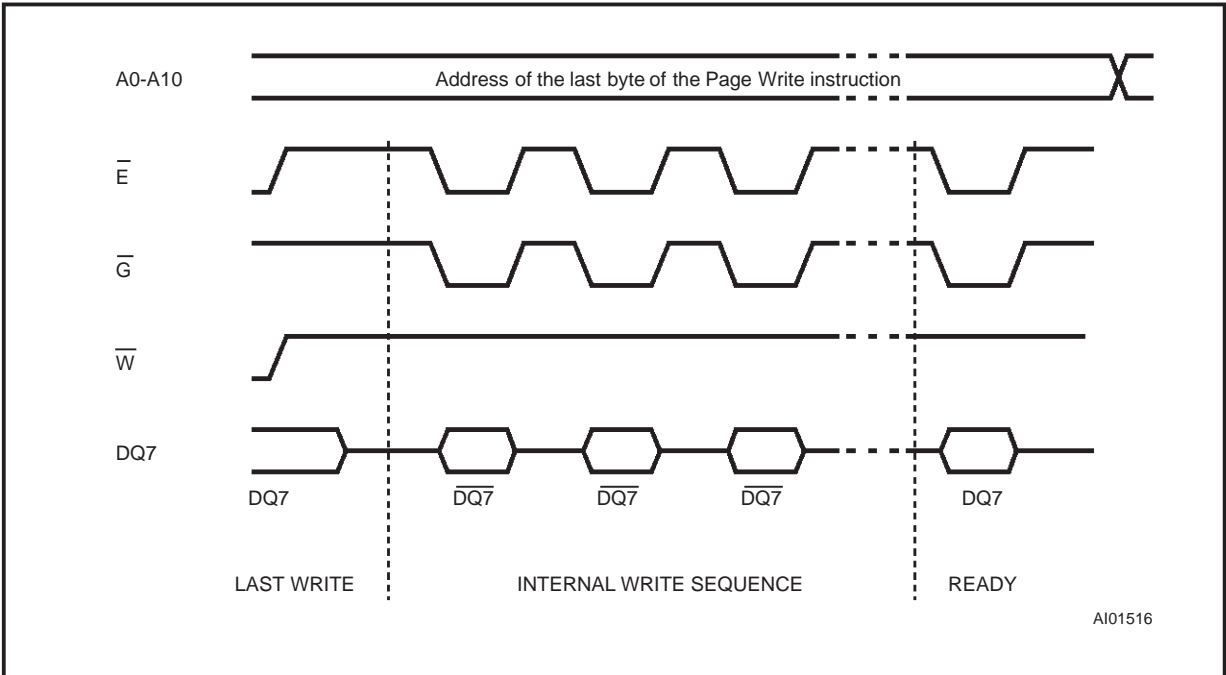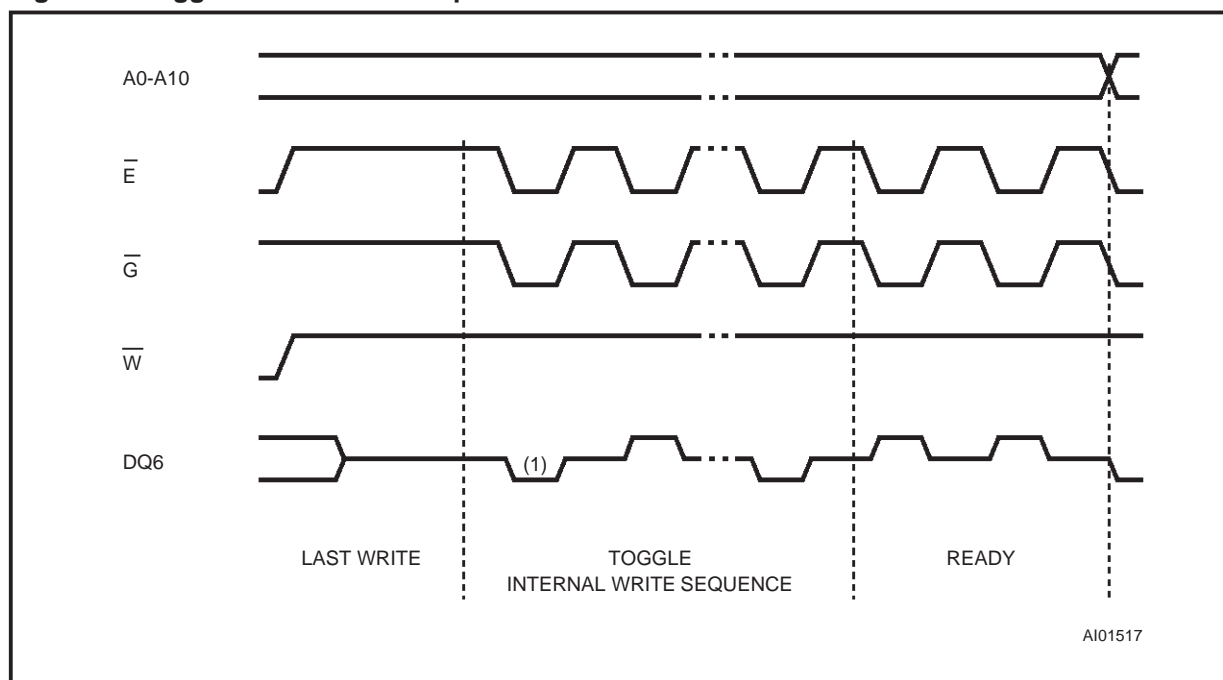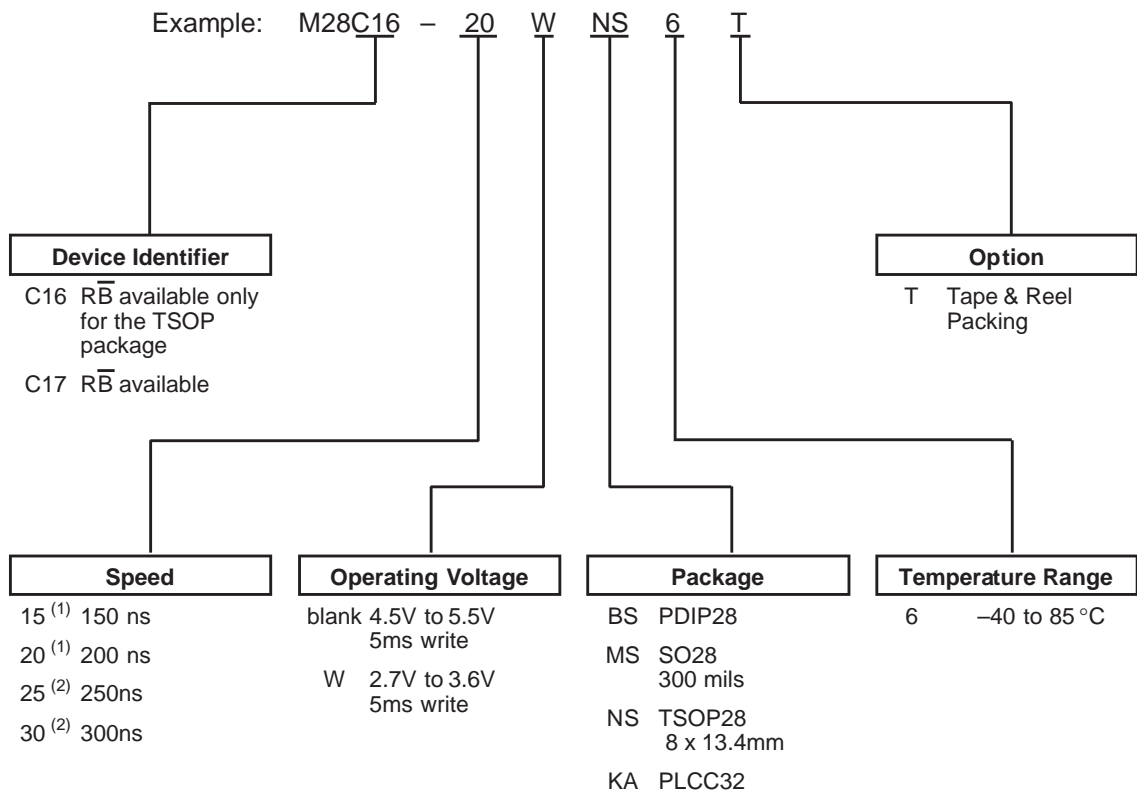**Figure 11. Data Polling Waveform Sequence**

AI01516

Figure 12. Toggle Bit Waveform Sequence

Note: 1. First Toggle bit is forced to '0'

ORDERING INFORMATION SCHEME

Example: M28C16 – 20 W NS 6 T

Device Identifier
C16 R$\overline{B}$ available only for the TSOP package
C17 R$\overline{B}$ available

Option
T Tape & Reel Packing

Speed
15 [1] 150 ns
20 [1] 200 ns
25 [2] 250ns
30 [2] 300ns

Operating Voltage
blank 4.5V to 5.5V 5ms write
W 2.7V to 3.6V 5ms write

Package
BS PDIP28
MS SO28 300 mils
NS TSOP28 8 x 13.4mm
KA PLCC32

Temperature Range
6 −40 to 85 °C

Notes: 1. Available for M28C16A and M28C17A only.
2. Available for "W" Operating Voltage only.

Devices are shipped from the factory with the memory content set at all "1's" (FFh).

For a list of available options (Speed, Package, etc...) or for further information on any aspect of this device, please contact the STMicroelectronics Sales Office nearest to you.

## PDIP28 - 28 pin Plastic DIP, 600 mils width

Symb	mm			inches		
	Typ	Min	Max	Typ	Min	Max
A		–	5.08		–	0.200
A1		0.38	–		0.015	–
A2		3.56	4.06		0.140	0.160
B		0.38	0.51		0.015	0.020
B1	1.52	–	–	0.060	–	–
C		0.20	0.30		0.008	0.012
D		36.83	37.34		1.450	1.470
D2	33.02	–	–	1.300	–	–
E	15.24	–	–	0.600	–	–
E1		13.59	13.84		0.535	0.545
e1	2.54	–	–	0.100	–	–
eA	14.99	–	–	0.590	–	–
eB		15.24	17.78		0.600	0.700
L		3.18	3.43		0.125	0.135
S		1.78	2.08		0.070	0.082
α		0°	10°		0°	10°
N	28			28		
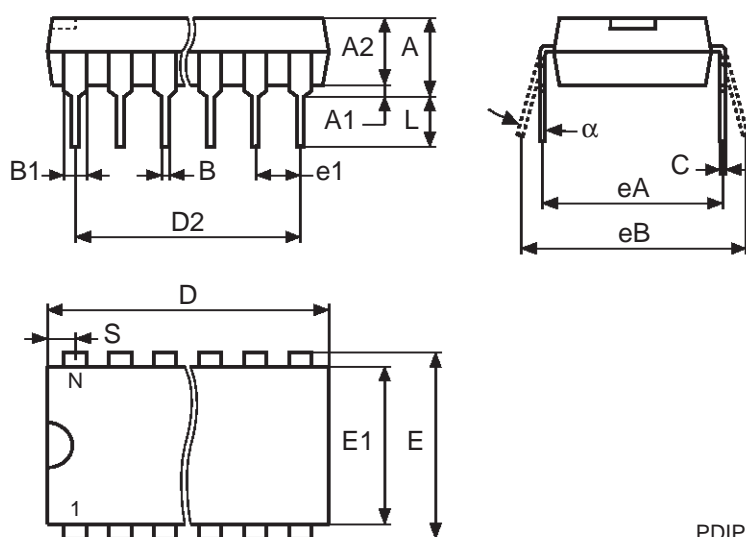
Drawing is not to scale.

PLCC32 - 32 lead Plastic Leaded Chip Carrier, rectangular

Symb	mm			inches		
	Typ	Min	Max	Typ	Min	Max
A		2.54	3.56		0.100	0.140
A1		1.52	2.41		0.060	0.095
A2		–	0.38		–	0.015
B		0.33	0.53		0.013	0.021
B1		0.66	0.81		0.026	0.032
D		12.32	12.57		0.485	0.495
D1		11.35	11.56		0.447	0.455
D2		9.91	10.92		0.390	0.430
E		14.86	15.11		0.585	0.595
E1		13.89	14.10		0.547	0.555
E2		12.45	13.46		0.490	0.530
e	1.27	–	–	0.050	–	–
F		0.00	0.25		0.000	0.010
R	0.89	–	–	0.035	–	–
N		32			32	
Nd		7			7	
Ne		9			9	
CP			0.10			0.004
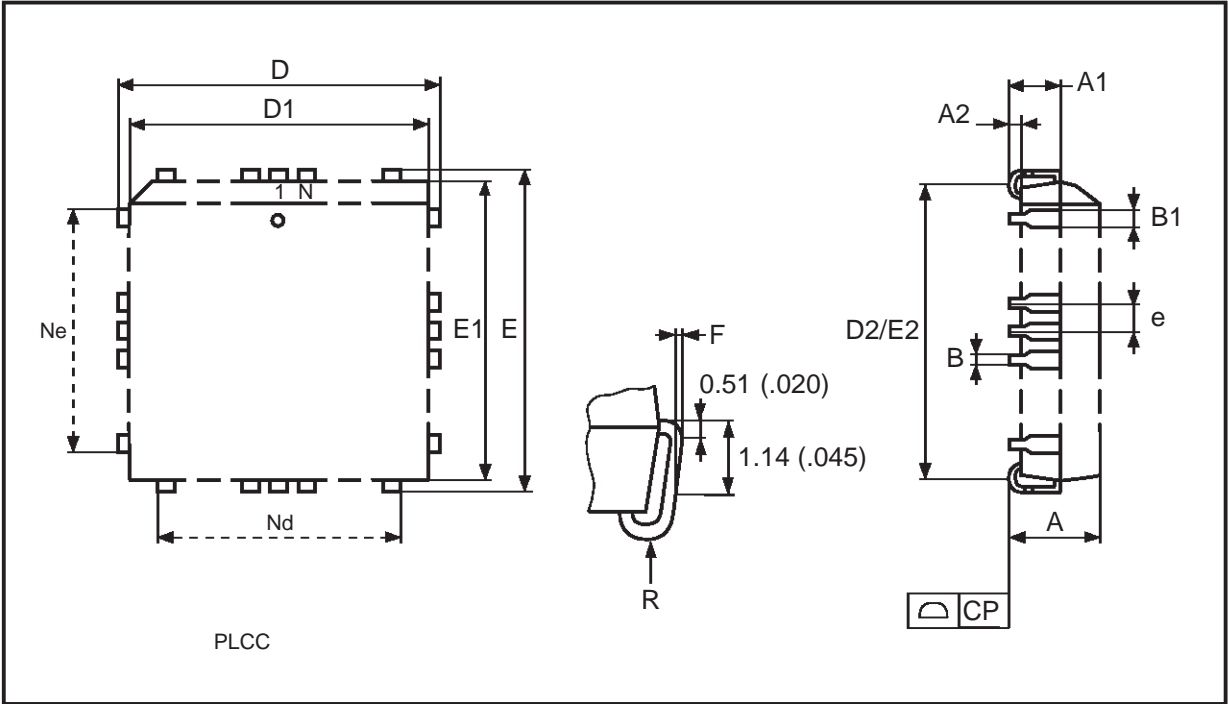
Drawing is not to scale.

SO28 - 28 lead Plastic Small Outline, 300 mils body width

Symb	mm			inches		
	Typ	Min	Max	Typ	Min	Max
A		2.46	2.64		0.097	0.104
A1		0.13	0.29		0.005	0.011
A2		2.29	2.39		0.090	0.094
B		0.35	0.48		0.014	0.019
C		0.23	0.32		0.009	0.013
D		17.81	18.06		0.701	0.711
E		7.42	7.59		0.292	0.299
e	1.27	–	–	0.050	–	–
H		10.16	10.41		0.400	0.410
L		0.61	1.02		0.024	0.040
α		0°	8°		0°	8°
N		28			28	
CP			0.10			0.004

SO-b
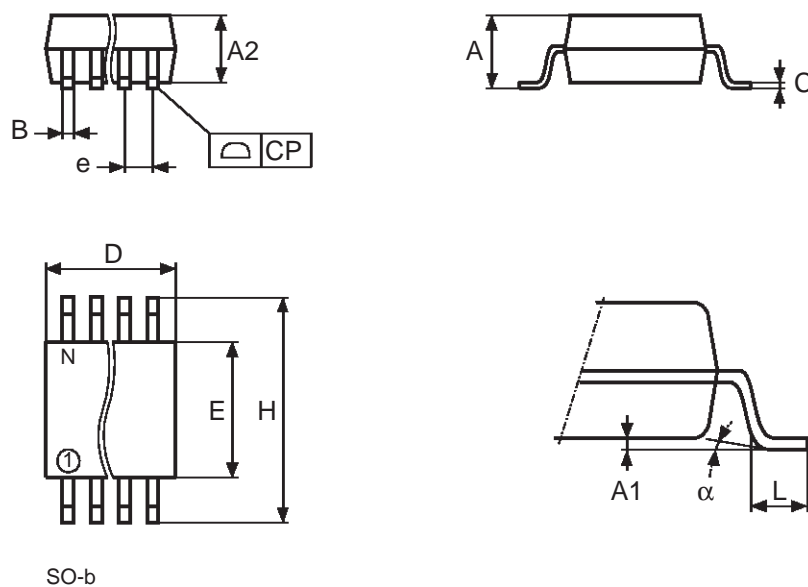
Drawing is not to scale.

TSOP28 - 28 lead Plastic Thin Small Outline, 8 x 13.4mm

Symb	mm			inches		
	Typ	Min	Max	Typ	Min	Max
A			1.25			0.049
A1			0.20			0.008
A2		0.95	1.15		0.037	0.045
B		0.17	0.27		0.007	0.011
C		0.10	0.21		0.004	0.008
D		13.20	13.60		0.520	0.535
D1		11.70	11.90		0.461	0.469
E		7.90	8.10		0.311	0.319
e	0.55	-	-	0.022	-	-
L		0.50	0.70		0.020	0.028
α		0°	5°		0°	5°
N		28			28	
CP			0.10			0.004

TSOP-c

Drawing is not to scale.

STMicroelectronics GROUP OF COMPANIES
Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.