

Supplementary Materials

1 Hinge Kinematics for Robot Base Planner

1.1 Hinge Kinematics

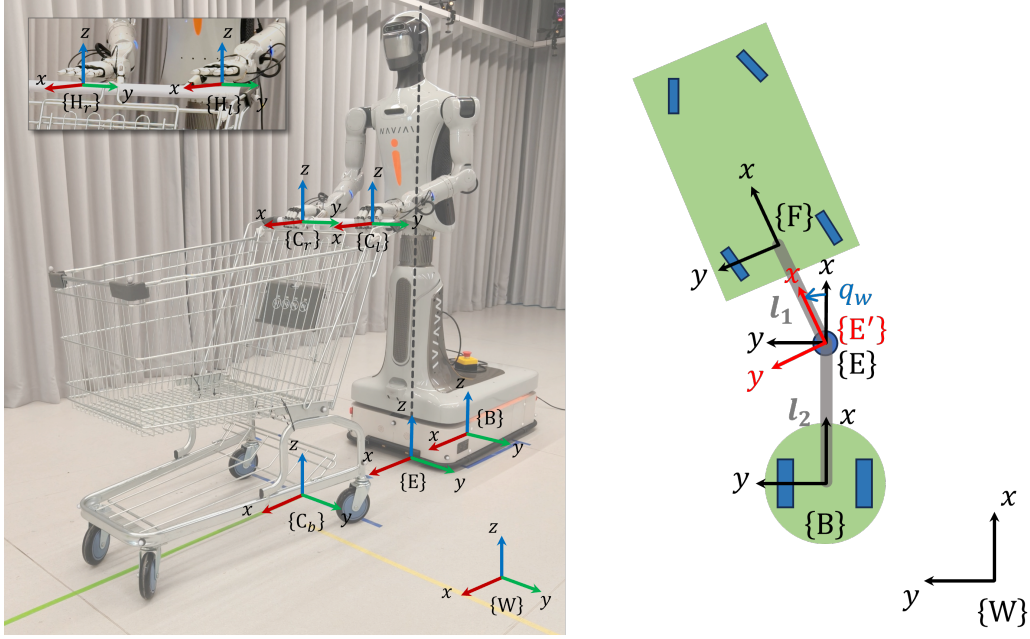


Fig. 1. Frame definitions for the cart-handling system.

Hinge kinematics is used to plan the motion of the robot chassis during cart-handling tasks. As shown on the right side of Fig. 1, given the cart state $(\mathbf{x}_F, \mathbf{v}_F)$ in $\{W\}$ and the waist-yaw angle $q_w, \dot{q}_w$, the chassis state $(\mathbf{x}_B, \mathbf{v}_B)$ follows

$$\begin{bmatrix} x_B \\ y_B \\ \theta_B \end{bmatrix} = \begin{bmatrix} x_F \\ y_F \\ \theta_F \end{bmatrix} + \begin{bmatrix} -l_1 c \theta_F - l_2 c (\theta_F - q_w) \\ -l_1 s \theta_F - l_2 s (\theta_F - q_w) \\ -q_w \end{bmatrix}, \quad (1)$$

$$\begin{bmatrix} \dot{x}_B \\ \dot{y}_B \\ \dot{\theta}_B \end{bmatrix} = \begin{bmatrix} \dot{x}_F \\ \dot{y}_F \\ \dot{\theta}_F \end{bmatrix} + \begin{bmatrix} l_1 s \theta_F + l_2 s (\theta_F - q_w) & l_2 s (\theta_F - q_w) \\ -l_1 c \theta_F - l_2 c (\theta_F - q_w) & -l_2 c (\theta_F - q_w) \\ 0 & -1 \end{bmatrix} \begin{bmatrix} \dot{\theta}_F \\ \dot{q}_w \end{bmatrix}, \quad (2)$$

where $l_1 = |FE|, l_2 = |EB|$, and $c\theta = \cos \theta, s\theta = \sin \theta$. We compactly write the hinge kinematics as $(\mathbf{x}_B, \mathbf{v}_B) = \text{HK}(\mathbf{x}_F, \mathbf{v}_F, q_w, \dot{q}_w)$.

1.2 Robot Base Planner

Before whole-body control, a reference trajectory of the robot base and waist-yaw needs to be generated under the hinge kinematics and the nonholonomic constraint of the robot differential-drive wheels. This robot base planner helps coordinate the movement of the chassis and upper body, and prevents the upper body from reaching singular or infeasible configurations. Treating $\mathbf{x}_{E'}$ (related to the current cart pose $\mathbf{x}_F$) as the reference waist state, we optimize $\mathbf{x}_B$ and q_w to make $\mathbf{x}_E$ move toward $\mathbf{x}_{E'}$ as fast as possible while satisfying constraints. The reference waist angle and velocity are computed as follows:

$$q_w^{ref} = \text{atan2}(\overrightarrow{BE} \times \overrightarrow{E'F}, \overrightarrow{BE} \cdot \overrightarrow{E'F}), \dot{q}_w^{ref} = \omega_{x_F} - \omega_{x_B}. \quad (3)$$

We define the state and input of this reference generator as $\mathbf{x} = [\mathbf{x}_B, q_w, \mathbf{v}_B, \dot{q}_w]^T$ and $\mathbf{u} = [\ddot{\mathbf{x}}_B, \ddot{q}_w]^T$. The problem is then formulated as

$$\min_{\mathbf{u}(\cdot)} J_1 = \int_{t=t_0}^{t_0+T} L_1(\mathbf{x}(t), \mathbf{x}^{ref}(t), \mathbf{u}(t)) dt, \quad (4)$$

$$\text{s.t. } \dot{\mathbf{x}}(t) = \begin{bmatrix} \mathbf{0} & \mathbf{I}_4 \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \mathbf{x}(t) + \begin{bmatrix} \mathbf{0} \\ \mathbf{I}_4 \end{bmatrix} \mathbf{u}(t), \quad (5)$$

$$\mathbf{x}^{ref}(t) = \text{HK}(\mathbf{x}_F(t), \mathbf{v}_F(t), q_w^{ref}(t), \dot{q}_w^{ref}(t)), \quad (6)$$

$$-q_{w,max} \leq q_w(t) \leq q_{w,max}, \quad (7)$$

$$-\mathbf{v}_{max} \leq [\mathbf{v}_B(t), \dot{q}_w(t)] \leq \mathbf{v}_{max}, \quad (8)$$

$$-\mathbf{u}_{max} \leq \mathbf{u}(t) \leq \mathbf{u}_{max}, \quad (9)$$

$$|\mathbf{v}_{y_B} \cos \theta_B - \mathbf{v}_{x_B} \sin \theta_B| \leq \epsilon, \quad (10)$$

where $\text{HK}(\cdot)$ denotes the hinge kinematic mapping, and the cost function is defined as

$$\begin{aligned} L_1 = & (\mathbf{x} - \mathbf{x}^{ref})^T \mathbf{Q}_1 (\mathbf{x} - \mathbf{x}^{ref}) + \mathbf{u}^T \mathbf{R}_1 \mathbf{u} \\ & + K_1 (\mathbf{v}_{y_B} \cos \theta_B - \mathbf{v}_{x_B} \sin \theta_B)^2 + K_2 q_w^2 + K_3 \dot{q}_w^2. \end{aligned} \quad (11)$$

With this optimization, the base and waist-yaw references ($\mathbf{x}_B^{des}, \mathbf{v}_B^{des}, q_w^{des}, \dot{q}_w^{des}$) can be computed on-line while satisfying kinematic constraints. These references are then sent to a whole-body MPC controller to optimize the motion of the entire robot.

2 Parameters for RL Training

2.1 Sampling Probabilities for Motion Mode Commands

The initial probability distribution of each motion mode is $P_0(m), m \in M_0$, whose values are listed in Table I.

TABLE I
SAMPLING PROBABILITIES FOR MOTION MODE COMMANDS.

Description	Probability
<i>Motion Type</i>	
straight-only	$p(m = a) = 0.50$
turn-only	$p(m = b) = 0.05$
straight-and-turn	$p(m = c) = 0.35$
standing	$p(m = d) = 0.10$
<i>Motion Heading</i>	
forward	$p(v > 0) = 0.50$
leftward	$p(\omega > 0) = 0.50$

2.2 Observation Noise

The observation space and additive noise settings are listed in Table II.

2.3 Termination Thresholds

Five termination conditions are set: episode timeout, cart too lifted, cart too tilted, EEs too far from the cart handle, and EEs too far from the nominal trajectories. The thresholds are listed in Table III.

TABLE II

OBSERVATION SPACE AND ADDITIVE NOISE FOR THE ACTOR ($\mathbf{o}_t$) AND CRITIC ($\mathbf{o}_t, \mathbf{o}_t^{pr}$). $k \in \{l, r\}$ DENOTES THE LEFT/RIGHT EE. $\mathbf{x}_B^A$ DENOTES THE ERROR OF FRAME B RELATIVE TO FRAME A, EXPRESSED IN FRAME B.

Description	Symbol	Dim.	Noise
$\mathbf{o}_t$			
Cart lifting	${}^w p_{C_b}$	1	$U(\pm 0.001)$
Cart tilting	${}^w \psi_{C_b}$	1	$U(\pm 0.001)$
Cart twist	${}^w \mathbf{v}_{C_b}$	6	$U(\pm 0.005)$
Cart and EE waypoints	${}^w \mathbf{x}_{C_b}^{nomN}, {}^w \mathbf{x}_{C_k}^{nomN}, {}^b \mathbf{v}_{C_b}^{nomN}, {}^b \mathbf{v}_{C_k}^{nomN}$	180	—
Cart and EE tracking error	${}^b \mathbf{x}_{C_b}^{nom}, {}^b \mathbf{x}_{H_k}^{nom}, {}^b \mathbf{v}_{C_b}^{nom}, {}^b \mathbf{v}_{H_k}^{nom}$	30	$U(\pm 0.005)$
EE control error	${}^b \mathbf{x}_{H_k}^{des}, {}^b \mathbf{v}_{H_k}^{des}$	24	$U(\pm 0.005)$
EE twist	${}^w \mathbf{v}_{H_k}$	12	$U(\pm 0.005)$
EE joint	q_k	2	$U(\pm 0.010)$
EE pose fetching error	${}^b \mathbf{x}_{H_k}^{C_k}$	12	$U(\pm 0.002)$
Action buffer	$\mathbf{a}_t, \mathbf{a}_{t-1}, \mathbf{a}_{t-2}$	42	—
$\mathbf{o}_t^{pr}$			
EE twist fetching error	${}^b \mathbf{v}_{H_k}^{C_k}$	12	—
Measured wrench at wrists	${}^b \mathbf{w}_{H_k}$	12	—
Cart mass	m_C	1	—

TABLE III

TERMINATION THRESHOLDS.

Description	Threshold
Episode timeout	$t_E = 30 \text{ s}$
Cart lifted	$p_{\varepsilon_0} = 0.05 \text{ m}$
Cart tilted	$\psi_{\varepsilon_0} = 0.05 \text{ rad}$
EE fetching error (pos & ori)	$\rho_{\varepsilon_0} = [0.04, 0.16, 0.03] \text{ m}, \phi_{\varepsilon_0} = [0.20, 0.20, 0.40] \text{ rad}$
EE tracking error (pos & ori)	$\rho_{\varepsilon_0} = 0.20 \text{ m}, \phi_{\varepsilon_0} = 0.40 \text{ rad}$

2.4 Reward Weights

Table IV lists all reward terms, formulations, and weights.

2.5 Domain Randomization

Domain randomization (DR) is adopted during RL training to improve robustness. The parameter ranges are summarized in Table V, where the force and torque directions are generated by normalizing Gaussian random vectors to unit length when applying external disturbances.

TABLE IV
REWARDS. $i \in \{1, \dots, 4\}$ AND $k \in \{l, r\}$.


Description	Formulation	Weight
<i>Task Rewards</i>		
Cart pose tracking	$r_{1,t} = w_1 \exp\left(-\sum_{i=1}^4 \left\ w\mathbf{x}_{C_i}^{nom} - w\mathbf{x}_{C_i}\right\ _2^2 / \sigma_1^2\right)$	$w_1 = 20, \sigma_1 = 0.05$
Cart twist tracking	$r_{2,t} = w_2 \exp\left(-\sum_{i=1}^4 \left\ b\mathbf{v}_{C_i}^{nom} - b\mathbf{v}_{C_i}\right\ _2^2 / \sigma_2^2\right)$	$w_2 = 10, \sigma_2 = 0.05$
EE pose tracking	$r_{3,t} = w_3 \sum_{k=l,r} \left[\exp\left(-\left\ \mathbf{K}_{pos} \cdot b\boldsymbol{\rho}_{H_k}^{C_k nom}\right\ _2^2 / \sigma_3^2\right) + \exp\left(-\left\ \mathbf{K}_{ori} \cdot b\boldsymbol{\phi}_{H_k}^{C_k nom}\right\ _2^2 / \sigma_3^2\right) \right]$	$w_3 = 5, \sigma_3 = 0.05$ $\mathbf{K}_{pos} = \mathbf{K}_{ori} = [2.0, 1.5, 2.0]$
EE twist tracking	$r_{4,t} = w_4 \sum_{k=l,r} \left[\exp\left(-\left\ \mathbf{K}_{lin} \cdot b\mathbf{v}_{H_k}^{C_k nom}\right\ _2^2 / \sigma_4^2\right) + \exp\left(-\left\ \mathbf{K}_{ang} \cdot b\boldsymbol{\omega}_{H_k}^{C_k nom}\right\ _2^2 / \sigma_4^2\right) \right]$	$w_4 = 5, \sigma_4 = 0.05$ $\mathbf{K}_{lin} = \mathbf{K}_{ang} = [2.0, 1.5, 2.0]$
EE pose fetching	$r_{5,t} = w_5 \sum_{k=l,r} \left[\exp\left(-\left\ \mathbf{K}_{pos} \cdot b\boldsymbol{\rho}_{H_k}^{C_k}\right\ _2^2 / \sigma_5^2\right) + \exp\left(-\left\ \mathbf{K}_{ori} \cdot b\boldsymbol{\phi}_{H_k}^{C_k}\right\ _2^2 / \sigma_5^2\right) \right]$	$w_5 = 0.5, \sigma_5 = 1.0$ $\mathbf{K}_{pos} = \mathbf{K}_{ori} = [2.0, 1.5, 2.0]$
EE consistency	$r_{6,t} = w_6 \left[\exp\left(-\left\ w\boldsymbol{\rho}_{ZH_l} - w\boldsymbol{\rho}_{ZH_r}\right\ _2^2 / \sigma_6^2\right) + \exp\left(-\left\ w\boldsymbol{\phi}_{H_l} - w\boldsymbol{\phi}_{H_r}\right\ _2^2 / \sigma_6^2\right) \right]$	$w_6 = 0.5, \sigma_6 = 2.0$
EE gripping	$r_{7,t} = w_7 \sum_{k=l,r} \left[\mathbf{I} \cdot \exp((q_{open} - q_k) / \sigma_7^2) + (1 - \mathbf{I}) \cdot \exp((q_k - q_{close}) / \sigma_7^2) \right],$ if $b\boldsymbol{\rho}_{H_k}^{C_k} > \boldsymbol{\rho}_{\varepsilon_1}$ or $b\boldsymbol{\phi}_{H_k}^{C_k} > \boldsymbol{\phi}_{\varepsilon_1}$, $\mathbf{I} = 1$; else $\mathbf{I} = 0$.	$w_7 = 0.5, \sigma_7 = 0.5$ $\boldsymbol{\rho}_{\varepsilon_1} = [0.03, 0.12, 0.02]$ $\boldsymbol{\phi}_{\varepsilon_1} = [0.15, 0.15, 0.30]$ $q_{open} = 0.0 \text{ rad}, q_{close} = 1.0 \text{ rad}$
<i>Balance Penalties</i>		
Cart lifted	$r_{8,t} = w_8 (w\psi_{C_b})^2$	$w_8 = -2e5$
Cart tilted	$r_{9,t} = w_9 (w\psi_{C_b})^2$	$w_9 = -1e5$
Cart sliding	$r_{10,t} = w_{10} (b\mathbf{v}_{Y_{C_b}})^2$	$w_{10} = -1e3$
Cart undesired twist	$r_{11,t} = w_{11} \left[(b\boldsymbol{\omega}_{X_{C_b}})^2 + (b\boldsymbol{\omega}_{Y_{C_b}})^2 \right]$	$w_{11} = -1e3$
EE undesired twist	$r_{12,t} = w_{12} \sum_{k=l,r} \left[(b\boldsymbol{\omega}_{X_{H_k}})^2 + (b\boldsymbol{\omega}_{Y_{H_k}})^2 \right]$	$w_{12} = -1e2$
<i>Smoothness Penalties</i>		
Velocity smoothness	$r_{13,t} = w_{13} \sum_{k=l,r} \left\ w\mathbf{v}_{H_k}^{des}\right\ _2^2$	$w_{13} = -1.0$
Acceleration smoothness	$r_{14,t} = w_{14} \sum_{k=l,r} \left\ w\mathbf{a}_{H_k}^{des}\right\ _2^2$	$w_{14} = -1e-2$
<i>Survival Bonus</i>		
Milestone bonus	$r_{15,t} = \text{bonus}_i,$ if survival span t first reaches milestone $_i$, milestone $_i \in [0, 50, 150, 300, 450, 600, 750]$, bonus $_i \in [0, 1, 5, 10, 20, 30, 45]$.	$w_{15} = 1.0$

TABLE V
DOMAIN RANDOMIZATION RANGES.


Description	Easy	Hard
Friction coefficient ($\mu_s \geq \mu_d$)	$\mu_s \sim U(0.7, 0.9), \mu_d \sim U(0.5, 0.7)$	$\mu_s \sim U(0.6, 1.0), \mu_d \sim U(0.4, 0.8)$
Caster steering-axle and rolling-axle damping	$\eta_s \sim U(0.02, 0.08), \eta_r \sim U(0.01, 0.04)$	$\eta_s \sim U(0.02, 0.20), \eta_r \sim U(0.01, 0.10)$
Floating EE controller PD scaling factor	$K_{dr} \sim U(0.9, 1.1)$	$K_{dr} \sim U(0.8, 1.2)$
Cart mass scaling factor	$K_C \sim U(1.0, 1.5)$	$K_C \sim U(1.0, 2.0)$
Cart CoM position offset factor	$K_\Delta \sim U(-0.1, 0.1), (\Delta = K_\Delta[l_x, l_y, l_z])$	$K_\Delta \sim U(-0.2, 0.2), (\Delta = K_\Delta[l_x, l_y, l_z])$
Caster steering-axle initial angle	$q_s \sim U(-\pi/4, \pi/4)$	$q_s \sim U(-\pi, \pi)$
EE initial pose offset w.r.t. the cart handle	$\delta\rho_y \sim U(-0.05, 0.05)$	$\delta\rho_y \sim U(-0.05, 0.05), \delta\rho_x, \delta\rho_z \sim U(-0.005, 0.005)$ $\delta\phi_x, \delta\phi_y, \delta\phi_z \sim U(-0.025, 0.025)$
Random external disturbances on the cart	$\ f_e\ \sim U(0, 10), \ \tau_e\ \sim U(0, 1.0),$ $t_d \sim U(0.1, 0.5), t_i \sim U(0, 5)$	$\ f_e\ \sim U(0, 20), \ \tau_e\ \sim U(0, 2.0),$ $t_d \sim U(0.1, 0.5), t_i \sim U(0, 5)$

3 Simulation Results for Different End-Effectors


In addition to five-finger dexterous hands, we evaluate all methods, including the proposed approach and the baselines, with three-finger grippers and ring-shaped EEs in IsaacLab simulation. These EE geometries are shown in Fig. 2, and the detailed results are summarized in Tables VI and VII.



(a) Five-finger gripper.



(b) Three-finger gripper.



(c) Ring-shaped EE.

Fig. 2. End-Effector configurations evaluated in IsaacLab simulation.

TABLE VI

PUSH SIMULATION RESULTS IN ISAACLAB WITH DIFFERENT EE CONFIGURATIONS ON TrajA. THE BEST RESULT IN EACH COLUMN IS SHOWN IN RED.

EE Config.	Method	Push Pos Error [m]				Push Ori Error [rad]			
		MAE	MAX	Terminal	WTE	MAE	MAX	Terminal	WTE
Five-finger gripper	Open-loop	0.035±0.000	0.059±0.000	0.056±0.000	0.046±0.000	0.037±0.000	0.107±0.000	0.002±0.000	0.046±0.000
	Closed-loop	0.026±0.000	0.052±0.000	0.051±0.000	0.039±0.000	0.038±0.000	0.094±0.000	0.038±0.000	0.052±0.000
	SimpleRL	0.062±0.002	0.122±0.008	0.047±0.003	0.073±0.002	0.029±0.003	0.102±0.014	0.014±0.008	0.044±0.004
	Ours	0.013±0.000	0.022±0.001	0.022±0.000	0.018±0.000	0.012±0.000	0.042±0.002	0.008±0.001	0.019±0.001
Three-finger gripper	Open-loop	0.042±0.000	0.064±0.000	0.061±0.000	0.052±0.000	0.021±0.000	0.078±0.000	0.014±0.000	0.033±0.000
	Closed-loop	0.023±0.000	0.038±0.000	0.017±0.000	0.025±0.000	0.018±0.000	0.074±0.000	0.009±0.000	0.030±0.000
	SimpleRL	0.042±0.010	0.076±0.021	0.037±0.006	0.049±0.007	0.064±0.008	0.153±0.013	0.058±0.010	0.085±0.006
	Ours	0.009±0.000	0.064±0.001	0.011±0.000	0.023±0.000	0.007±0.002	0.037±0.005	0.004±0.001	0.014±0.001
Ring-shaped EE	Open-loop	0.042±0.000	0.068±0.000	0.014±0.000	0.042±0.000	0.023±0.000	0.105±0.000	0.011±0.000	0.041±0.000
	Closed-loop	0.043±0.000	0.064±0.000	0.061±0.000	0.053±0.000	0.020±0.000	0.091±0.000	0.004±0.000	0.034±0.000
	SimpleRL	0.059±0.001	0.113±0.001	0.024±0.004	0.064±0.001	0.046±0.000	0.091±0.001	0.061±0.004	0.061±0.001
	Ours	0.014±0.001	0.021±0.001	0.020±0.002	0.017±0.001	0.012±0.001	0.039±0.005	0.020±0.005	0.021±0.002

TABLE VII

PULL SIMULATION RESULTS IN ISAACLAB WITH DIFFERENT EE CONFIGURATIONS ON TrajB. THE BEST RESULT IN EACH COLUMN IS SHOWN IN RED.

EE Config.	Method	Pull Pos Error [m]				Pull Ori Error [rad]			
		MAE	MAX	Terminal	WTE	MAE	MAX	Terminal	WTE
Five-finger gripper	Open-loop	0.051±0.000	0.070±0.000	0.054±0.000	0.056±0.000	0.009±0.000	0.031±0.000	0.010±0.000	0.015±0.000
	Closed-loop	0.046±0.000	0.064±0.000	0.055±0.000	0.053±0.000	0.007±0.000	0.027±0.000	0.010±0.000	0.013±0.000
	SimpleRL	0.064±0.001	0.119±0.002	0.118±0.003	0.091±0.001	0.047±0.001	0.131±0.003	0.052±0.001	0.069±0.001
	Ours	0.011±0.000	0.031±0.000	0.028±0.001	0.020±0.000	0.012±0.000	0.035±0.000	0.010±0.001	0.017±0.000
Three-finger gripper	Open-loop	0.050±0.000	0.072±0.000	0.059±0.000	0.057±0.000	0.009±0.000	0.031±0.000	0.002±0.000	0.012±0.000
	Closed-loop	0.052±0.000	0.068±0.000	0.057±0.000	0.057±0.000	0.008±0.000	0.023±0.000	0.006±0.000	0.011±0.000
	SimpleRL	0.060±0.003	0.113±0.004	0.051±0.003	0.071±0.002	0.053±0.003	0.194±0.008	0.021±0.027	0.080±0.007
	Ours	0.011±0.001	0.069±0.003	0.006±0.000	0.024±0.001	0.006±0.001	0.044±0.005	0.001±0.002	0.014±0.002
Ring-shaped EE	Open-loop	0.051±0.000	0.077±0.000	0.026±0.000	0.051±0.000	0.011±0.000	0.043±0.000	0.007±0.000	0.018±0.000
	Closed-loop	0.050±0.000	0.071±0.000	0.058±0.000	0.057±0.000	0.011±0.000	0.037±0.000	0.001±0.000	0.015±0.000
	SimpleRL	0.056±0.001	0.090±0.003	0.031±0.002	0.058±0.001	0.048±0.002	0.097±0.003	0.087±0.007	0.070±0.002
	Ours	0.014±0.000	0.023±0.000	0.005±0.003	0.014±0.001	0.007±0.000	0.036±0.003	0.022±0.007	0.018±0.002

4 Simulation Results for Different Carts

To evaluate zero-shot generalization, the policy trained exclusively on the shopping cart is directly deployed to three unseen wheeled platforms in IsaacLab, namely a flatbed cart, a medical gurney, and a manual wheelchair, without any retraining or adaptation. These platforms differ in overall dimensions, handle height and diameter, and mass distribution. Their models are shown in Fig. 3, and the detailed results are summarized in Tables VIII and IX.

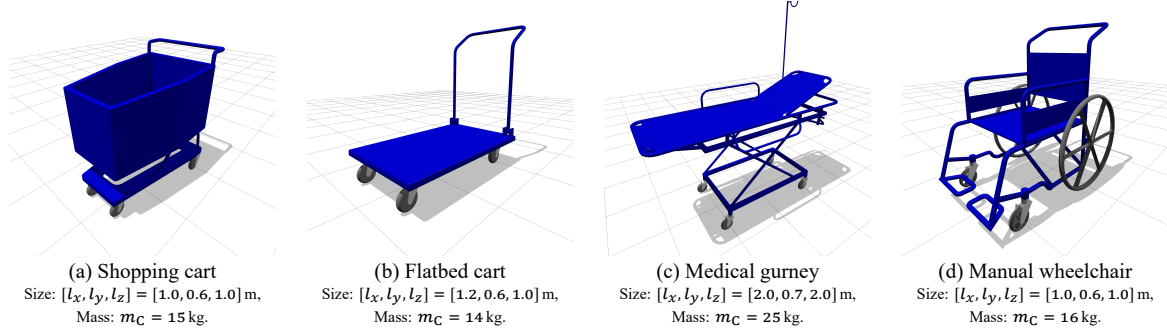


Fig. 3. Wheeled platforms evaluated in IsaacLab simulation.

TABLE VIII

PUSH SIMULATION RESULTS IN ISAACLAB WITH DIFFERENT WHEELED PLATFORMS ON TrajA. THE BEST RESULT IN EACH COLUMN IS SHOWN IN RED.

Cart Model	Method	Push Pos Error [m]				Push Ori Error [rad]			
		MAE	MAX	Terminal	WTE	MAE	MAX	Terminal	WTE
Shopping cart	Open-loop	0.035±0.000	0.059±0.000	0.056±0.000	0.046±0.000	0.037±0.000	0.107±0.000	0.002±0.000	0.046±0.000
	Closed-loop	0.026±0.000	0.052±0.000	0.051±0.000	0.039±0.000	0.038±0.000	0.094±0.000	0.038±0.000	0.052±0.000
	SimpleRL	0.062±0.002	0.122±0.008	0.047±0.003	0.073±0.002	0.029±0.003	0.102±0.014	0.014±0.008	0.044±0.004
	Ours	0.013±0.000	0.022±0.001	0.022±0.000	0.018±0.000	0.012±0.000	0.042±0.002	0.008±0.001	0.019±0.001
Flatbed cart	Open-loop	0.028±0.000	0.041±0.000	0.017±0.000	0.029±0.000	0.053±0.000	0.131±0.000	0.002±0.000	0.060±0.000
	Closed-loop	0.030±0.000	0.047±0.000	0.026±0.000	0.033±0.000	0.059±0.000	0.123±0.000	0.061±0.000	0.075±0.000
	SimpleRL	0.066±0.005	0.146±0.037	0.050±0.006	0.082±0.010	0.041±0.008	0.157±0.050	0.028±0.004	0.067±0.013
	Ours	0.010±0.000	0.022±0.001	0.006±0.004	0.012±0.001	0.016±0.001	0.044±0.001	0.009±0.004	0.021±0.001
Medical gurney	Open-loop	0.034±0.000	0.049±0.000	0.042±0.000	0.040±0.000	0.056±0.000	0.143±0.000	0.039±0.000	0.073±0.000
	Closed-loop	0.023±0.000	0.056±0.000	0.013±0.000	0.029±0.000	0.060±0.000	0.133±0.000	0.062±0.000	0.079±0.000
	SimpleRL	0.680±0.021	1.709±0.056	1.628±0.066	1.175±0.024	0.609±0.015	1.444±0.038	1.365±0.048	1.007±0.017
	Ours	0.016±0.000	0.028±0.003	0.018±0.000	0.020±0.001	0.019±0.002	0.040±0.002	0.019±0.008	0.024±0.002
Manual wheelchair	Open-loop	0.051±0.000	0.120±0.000	0.066±0.000	0.072±0.000	0.061±0.000	0.168±0.000	0.122±0.000	0.103±0.000
	Closed-loop	0.047±0.000	0.119±0.000	0.072±0.000	0.071±0.000	0.057±0.000	0.163±0.000	0.104±0.000	0.095±0.000
	SimpleRL	0.139±0.006	0.248±0.013	0.169±0.007	0.174±0.005	0.043±0.002	0.130±0.003	0.027±0.013	0.061±0.004
	Ours	0.023±0.000	0.040±0.001	0.016±0.014	0.026±0.004	0.036±0.001	0.077±0.001	0.005±0.001	0.038±0.000

TABLE IX

PULL SIMULATION RESULTS IN ISAACLAB WITH DIFFERENT WHEELED PLATFORMS ON TrajB. THE BEST RESULT IN EACH COLUMN IS SHOWN IN RED.

Cart Model	Method	Pull Pos Error [m]				Pull Ori Error [rad]			
		MAE	MAX	Terminal	WTE	MAE	MAX	Terminal	WTE
Shopping cart	Open-loop	0.051±0.000	0.070±0.000	0.054±0.000	0.056±0.000	0.009±0.000	0.031±0.000	0.010±0.000	0.015±0.000
	Closed-loop	0.046±0.000	0.064±0.000	0.055±0.000	0.053±0.000	0.007±0.000	0.027±0.000	0.010±0.000	0.013±0.000
	SimpleRL	0.064±0.001	0.119±0.002	0.118±0.003	0.091±0.001	0.047±0.001	0.131±0.003	0.052±0.001	0.069±0.001
	Ours	0.011±0.000	0.031±0.000	0.028±0.001	0.020±0.000	0.012±0.000	0.035±0.000	0.010±0.001	0.017±0.000
Flatbed cart	Open-loop	0.024±0.000	0.039±0.000	0.010±0.000	0.024±0.000	0.011±0.000	0.036±0.000	0.001±0.000	0.015±0.000
	Closed-loop	0.020±0.000	0.030±0.000	0.022±0.000	0.023±0.000	0.010±0.000	0.027±0.000	0.004±0.000	0.012±0.000
	SimpleRL	0.065±0.000	0.123±0.004	0.122±0.004	0.094±0.001	0.047±0.001	0.114±0.006	0.052±0.005	0.065±0.002
	Ours	0.017±0.000	0.037±0.001	0.026±0.002	0.024±0.000	0.011±0.001	0.026±0.002	0.004±0.001	0.013±0.001
Medical gurney	Open-loop	0.034±0.000	0.055±0.000	0.038±0.000	0.040±0.000	0.047±0.000	0.103±0.000	0.013±0.000	0.052±0.000
	Closed-loop	0.030±0.000	0.050±0.000	0.041±0.000	0.038±0.000	0.042±0.000	0.086±0.000	0.039±0.000	0.053±0.000
	SimpleRL	0.060±0.001	0.118±0.003	0.117±0.003	0.089±0.001	0.023±0.001	0.081±0.005	0.029±0.002	0.039±0.002
	Ours	0.015±0.000	0.024±0.001	0.021±0.001	0.019±0.000	0.020±0.001	0.052±0.002	0.032±0.002	0.031±0.001
Manual wheelchair	Open-loop	0.020±0.000	0.053±0.000	0.014±0.000	0.027±0.000	0.006±0.000	0.031±0.000	0.001±0.000	0.011±0.000
	Closed-loop	0.014±0.000	0.039±0.000	0.015±0.000	0.020±0.000	0.004±0.000	0.024±0.000	0.001±0.000	0.009±0.000
	SimpleRL	0.056±0.001	0.083±0.001	0.054±0.003	0.062±0.001	0.018±0.000	0.078±0.003	0.007±0.002	0.030±0.001
	Ours	0.014±0.000	0.044±0.003	0.029±0.005	0.025±0.001	0.011±0.000	0.036±0.002	0.003±0.003	0.015±0.001