Submittal Data Information

101-028

Model 006 Cartridge Circulator

Effective: 10/17/24

Supersedes: 03/20/17

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.	

Features

- Standard high capacity output - Compact design
- Quiet, efficient operation
- Direct drive - Low power consumption
- Unique replaceable cartridge design - Field serviceable
- Self lubricating
- No mechanical seal
- Unmatched reliability - Maintenance free
- Low-lead Bronze sweat or Stainless Steel with threaded or union connections

Materials of Construction

Casing (Volute):	Low-lead Bronze or Stainless Steel
Stator housing:	Steel
Cartridge:	Stainless Steel
Impeller:	Non-metallic
Shaft:	Ceramic
Bearings:	Carbon
O-Ring & Gaskets:	EPDM *Chlorine resistant*

Model Nomenclature

- B - Bronze, 3/4" sweat
- BC - Bronze, 1/2" sweat, panel mount tappings
- ST - Stainless Steel, 3/4" NPT
- SC - Stainless Steel, union, panel mount tappings

Performance Data

- Flow Range: 0 – 11 GPM
- Head Range: 0 – 9.5 Feet
- Min. Fluid Temperature: 40°F (4°C)
- Max. Fluid Temperature: 220°F (104°C)
- Max. Working Pressure: 125 psi
- Connection sizes: 1/2" swt, 3/4" swt, 3/4" NPT or union

Certifications & Listings

c UL us LISTED **FOR INDOOR USE ONLY**


NSF Certified to NSF/ANSI/CAN 61 & 372 **Low-Lead Compliant**

Application


The Taco 006 is designed for circulating hot or chilled fresh water in open or closed loop applications. Typical uses include hydronic heating, domestic hot water recirculation, hydro-air heating/cooling, heat recovery units, water source heat pumps, drain down open loop Solar systems and potable water applications. The unique, replaceable cartridge contains all of the moving parts and allows for easy service instead of replacing the entire circulator. The compact, low power consumption design is ideal for high efficiency jobs.

Pump Dimensions & Weights

Models	Conn.	A		B		C		D		F		G		Ship Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
006-BC4	1/2" Swt.	5-1/8	130	4-1/8	105	2-1/8	54	3-1/16	78	3-15/16	84	4-1/4	108	6.0	2.7
006-B4	3/4" Swt.	5-1/8	130	4-1/8	105	2-3/16	56	3-1/16	78	3-15/16	84	4-3/8	111	6.0	2.7
006-ST4	3/4" NPT	5-5/8	143	4-7/8	124	2	51	3-1/16	78	3-15/16	84	4	102	6.0	2.7
006-SC4- 1	Union	5-5/32	131	4-11/32	110	2-31/32	76	3-1/16	78	3-15/16	84	5-15/16	151	6.0	2.7

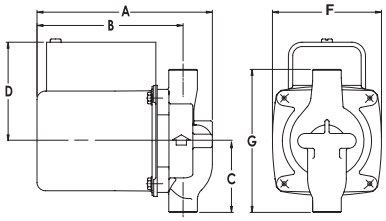

Mounting Positions

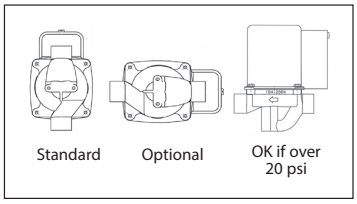


Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
All 006 Models	115	60	1	.52	3250	1/40
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

Performance Field - 60Hz

Taco 00e CIRCULATORS

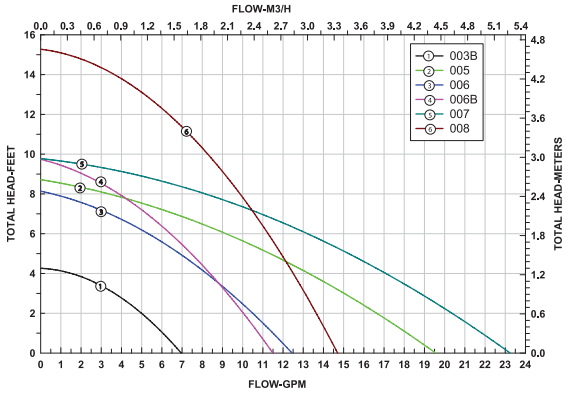

Taco Comfort Solutions®
A Taco Family Company

Taco Inc., 1160 Cranston Street, Cranston, RI 02920 / (401) 942-8000
Taco (Canada) Ltd., 8450 Lawson Road, Unit #3, Milton, Ontario L9T 0J8 / (905) 564-9422