


DG240 V2

RS232 switcher

15 Sep 2017

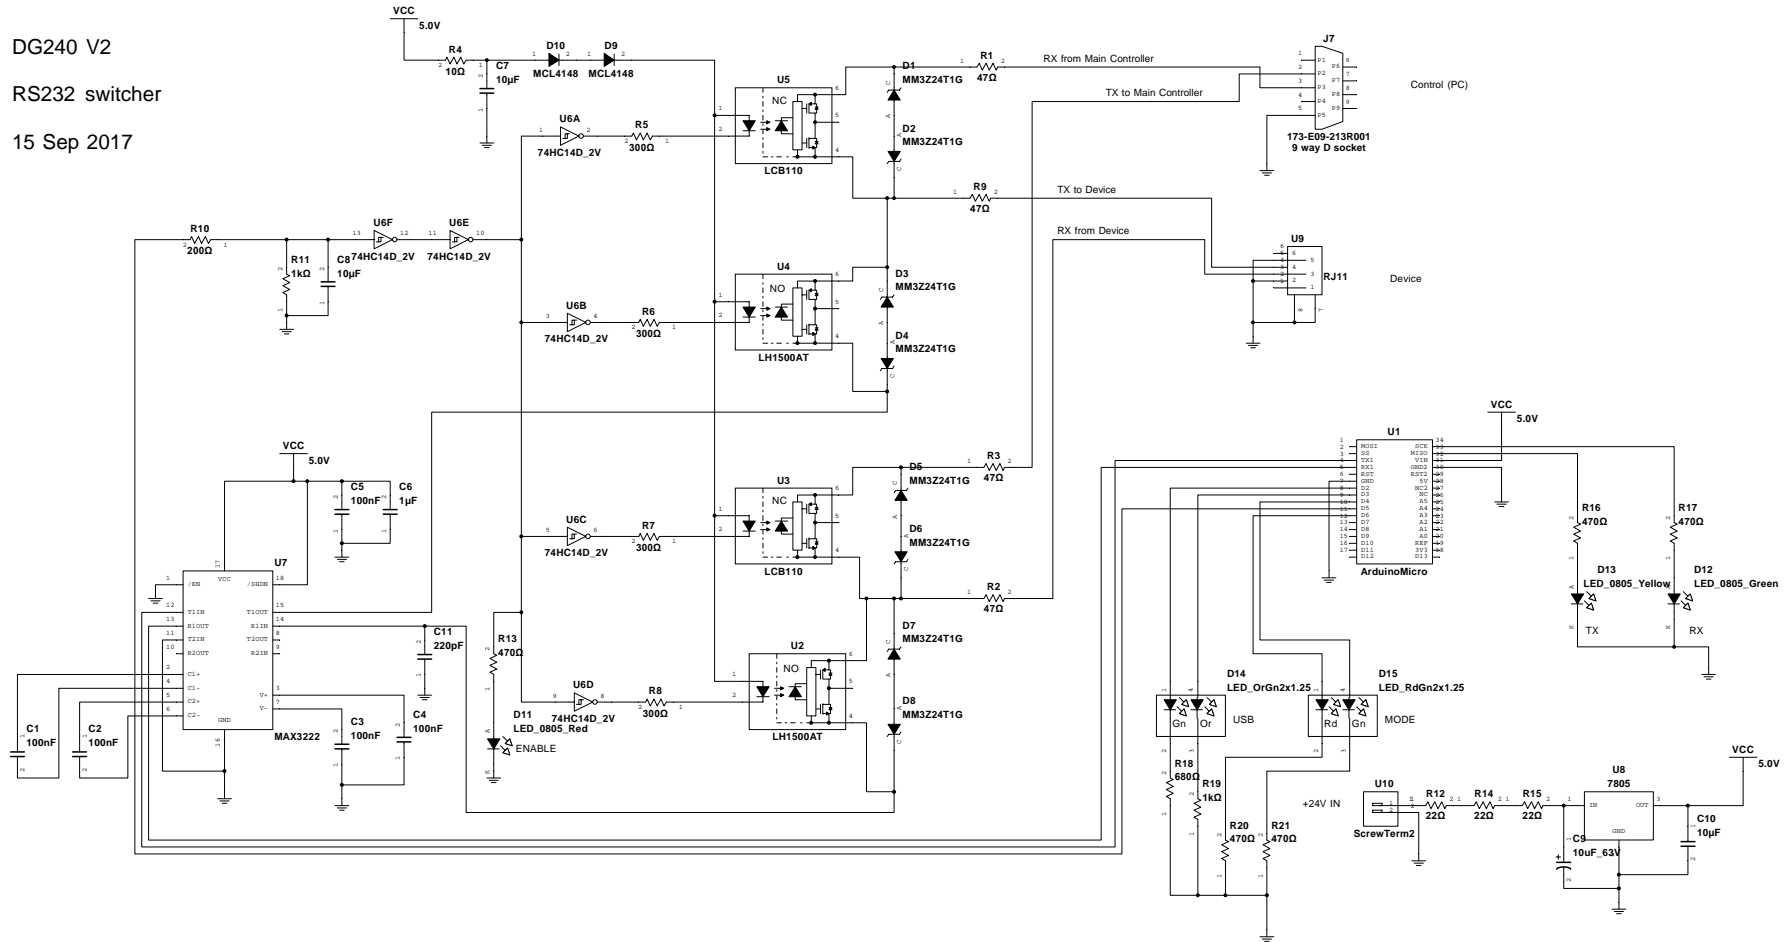

Note: Adjust led current limit resistors to match led brightness

Changes:

1. Add 220pF from MAX3222 pin 14 (R1IN) to GND
2. Connect +5V to VIN on Arduino Micro

Next issue:

1. Change 7805 regulator to 7808 and connect to VIN pin only (not +5V)