

D

C

B

A

D

C

B



A

- NOTES
1. THIS IS A REDUCED DIM DRAWING. UOS ALL DIM BASIC
UOS ALL DIM DERIVED FROM MFG STEP FILE
2. UOS ALL SURF

	0.005	A	B	C
--	-------	---	---	---
3. UOS ALL DIM ± 0.005
 $\pm 1.0^\circ$

- ① THIS DIMENSION APPLIES ONLY TO RIGHT STUB SHAFT. LEFT STUB SHAFT IS 1.630 ± 0.005 .
ALL OTHER DIMENSIONS AND TOLERANCES APPLY.
- ② INNER DIAMETER REVISION

EXTERNAL SPLINE ANSI B92.1				
DESIGNATION	FILLET ROOT SIDE FIT			
NUMBER OF TEETH	25			
SPLINE PITCH	24/48			
PRESSURE ANGLE	45°			
PITCH DIAMETER	1.04167 REF			
PITCH DIAMETER RUNOUT	<table><tr><td></td><td>0.0007</td><td>A</td></tr></table>		0.0007	A
	0.0007	A		
MAJOR DIAMETER	1.088/1.078			
FORM DIAMETER	1.012			
MINOR DIAMETER	1.000			
MIN MEASUREMENT OVER PINS	1.169 REF			
PIN DIAMETER	0.080			
FILLET RADIUS MIN	0.014			

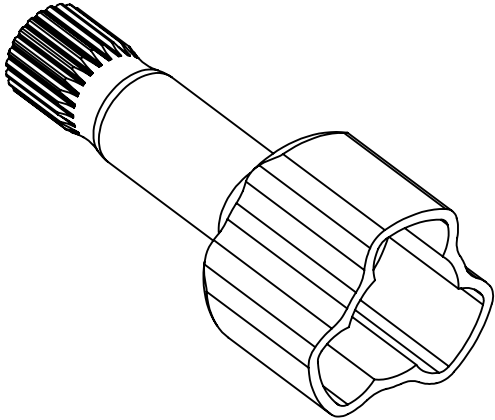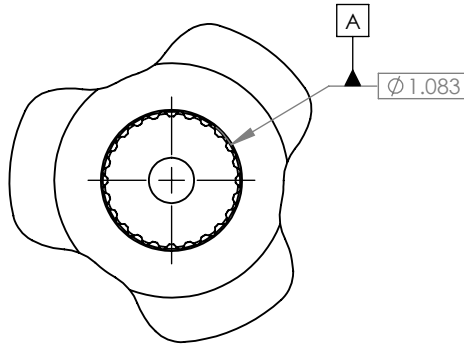

LHAE LONGHORN RACING ELECTRIC		ENGR	SHEPHERD, GABRIELLA	11/19/25	RIGHT STUB SHAFT		
		DFTR	SHEPHERD, GABRIELLA	11/19/25			
UNLESS OTHERWISE SPECIFIED INTERPRET PER ASME Y14.5-2018 PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LONGHORN RACING ELECTRIC. ANY REPRODUCTION IN ANY PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION OF LONGHORN RACING ELECTRIC IS PROHIBITED	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES		MATERIAL AISI 4340 OIL QUENCHED AND TEMPERED 205°C		CONFIG CHAINSIDE (RH)		
	SURFACE FINISH = 1.5/						
	BREAK ALL SHARP EDGES AND REMOVE BURRS		FINISH NITRIDE TO HRC 60		SIZE	PN	REV
	THIRD ANGLE PROJECTION				A4	26-PTN-3200-03	02
					SCALE	QTY	SHEET
				1:1.5	01	1 of 2	

