
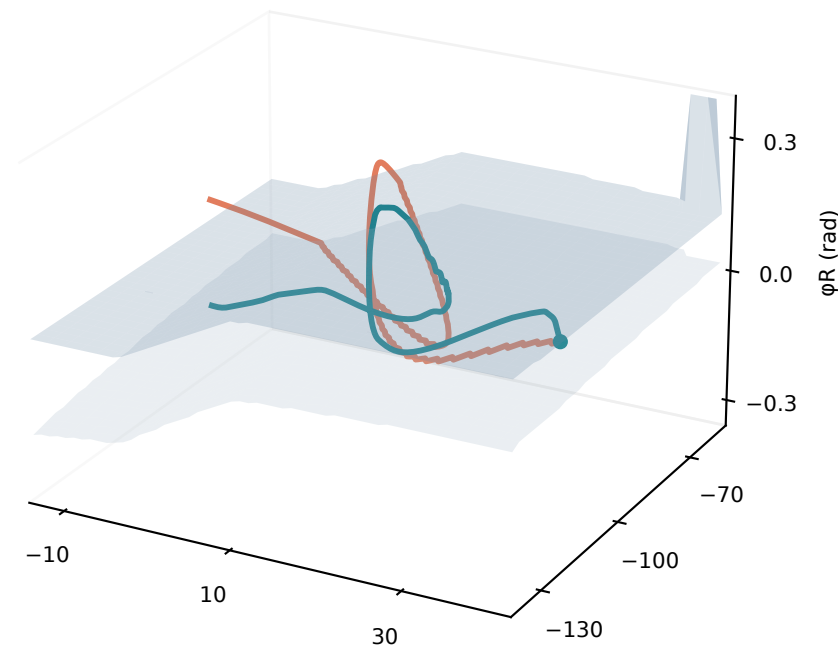


Bimanual redundancy manifold: DP and RLPD phase paths (detail)

DP (registered to LUT phase) RLPD (checkpoint 60,000) LUT safe-phase bounds

a Left arm

b Right arm

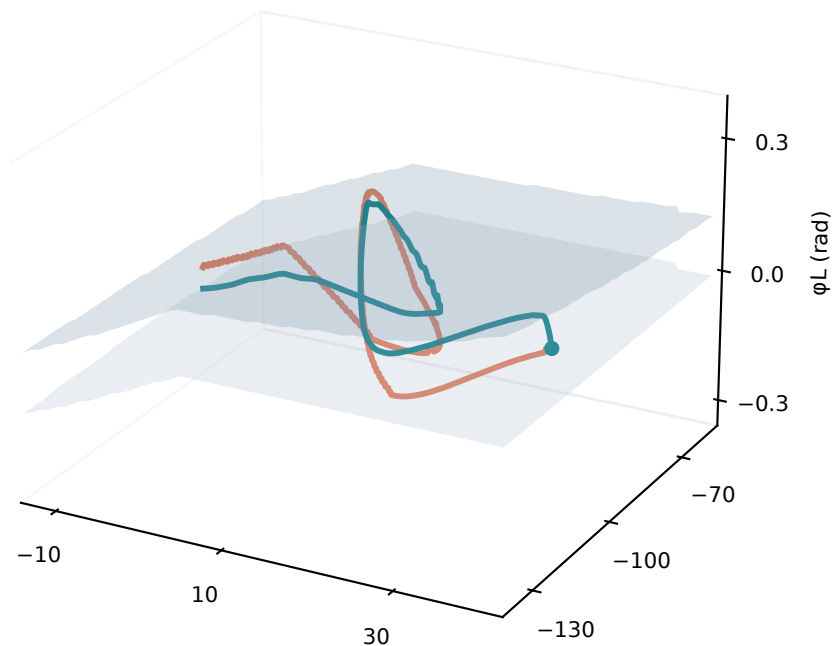

Axes: θ = wheel angle ($^\circ$) · s = pull (mm) · ϕ = redundancy phase (rad)

DP task 0030 · DP registration max joint error 0.0033 rad · shaded domain excludes flagged grid cells