Snel Stall Delay: Does 3-D Correction Matter at System Level?
BEM v2.1 — 384-Config Sweep With and Without Snel

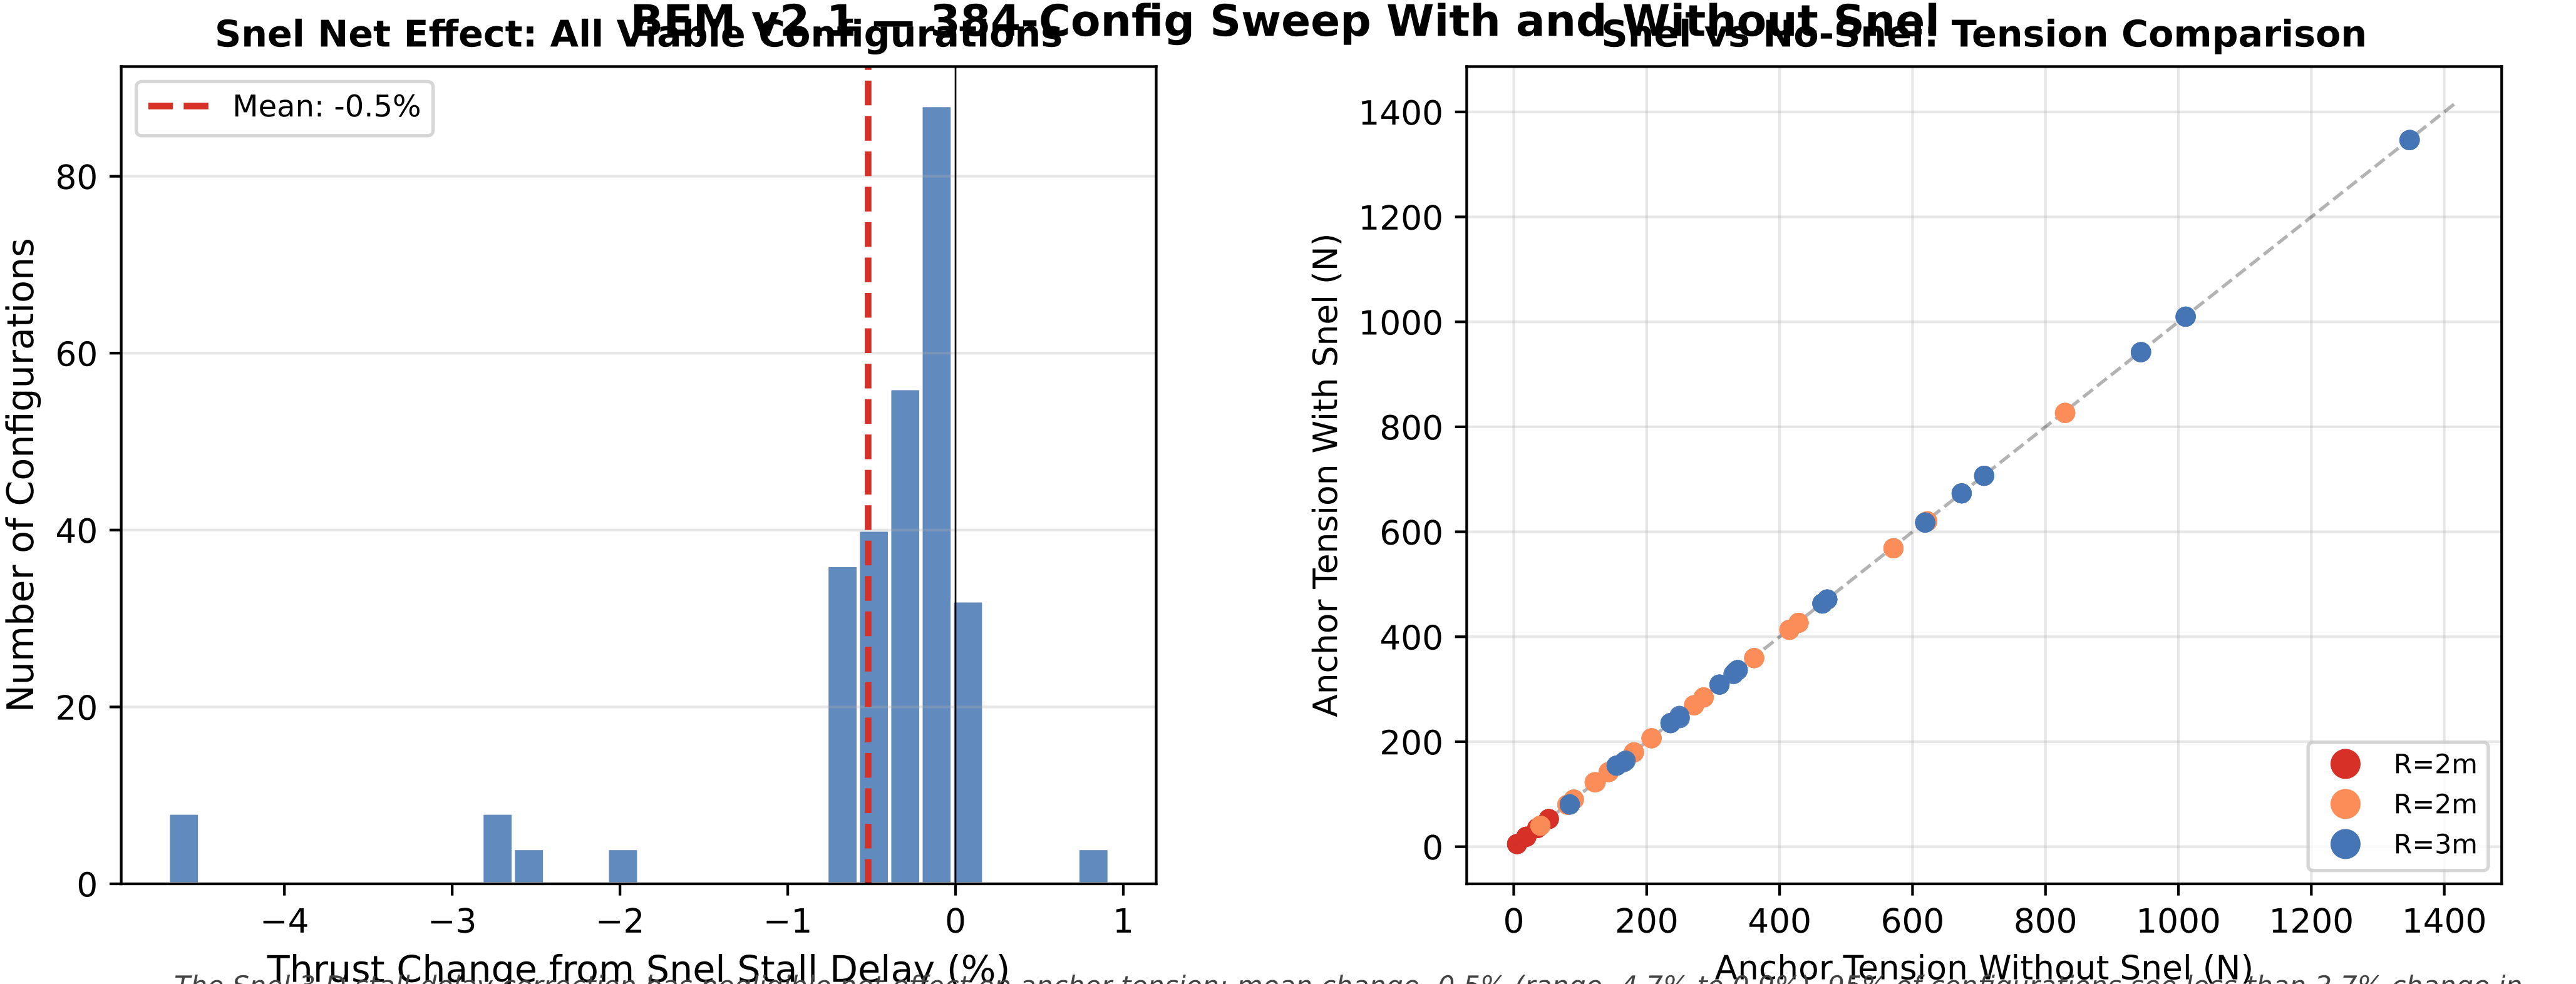

The Snel 3-D stall-delay correction has negligible net effect on anchor tension: mean change -0.5% (range -4.7% to 0.9%). 95% of configurations see less than 2.7% change in either direction. The correction boosts CL at the root (+32% at r/R=0.1) but this contributes little to total thrust because dynamic pressure is low at small radii. At design-point tip stations (r/R>0.7), the blade operates below stall and the correction is inactive. Snel matters for start-up and low-RPM conditions but does not affect steady-state autorotation thrust. The radial loading chart (bem-radial-loading) shows the full blade distribution. Data: 384-config BEM sweep, Snel on vs off, identical conditions.