


Inline Autogyro Rotor Assembly — Full Cross-Section

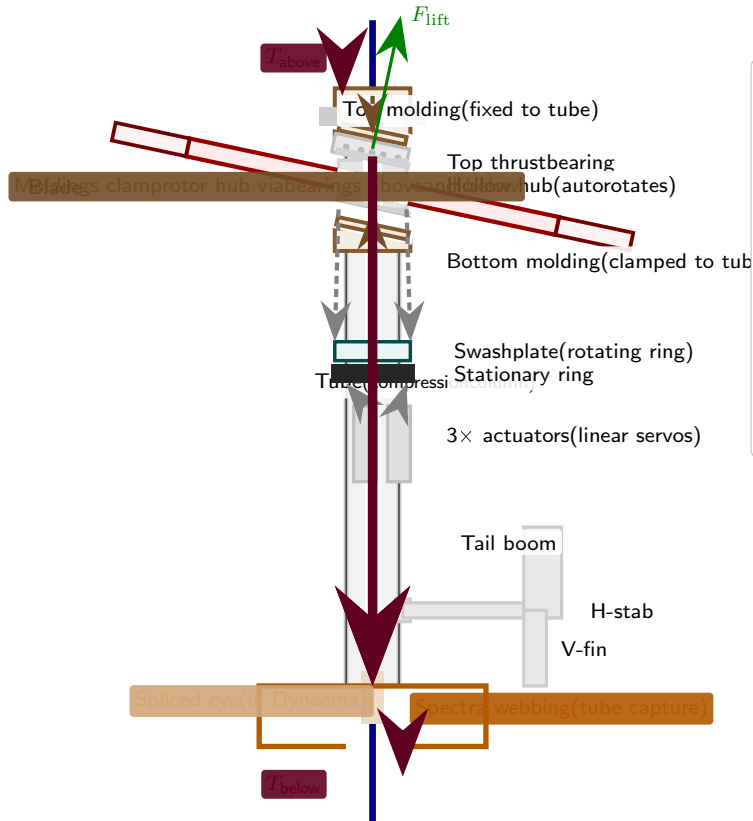

Assembly order (top → bottom)

1. Top molding (angled underside)
2. Top thrust bearing
3. Rotor hub + disk + blades
(autorotates between bearings)
4. Bottom thrust bearing
5. Bottom molding
6. Swashplate (below rotor)
7. 3× linear actuators
8. Empennage boom + H-stab + V-fin
9. Webbing capture → spliced eye

Load path:

$F_{lift} \rightarrow$ hub $\rightarrow$ top bearing $\rightarrow$
 top molding $\rightarrow$ tube compression $\rightarrow$
 bottom molding $\rightarrow$ webbing $\rightarrow$ Dyneema

$$T_{below} = T_{above} + F_{lift} - W$$