
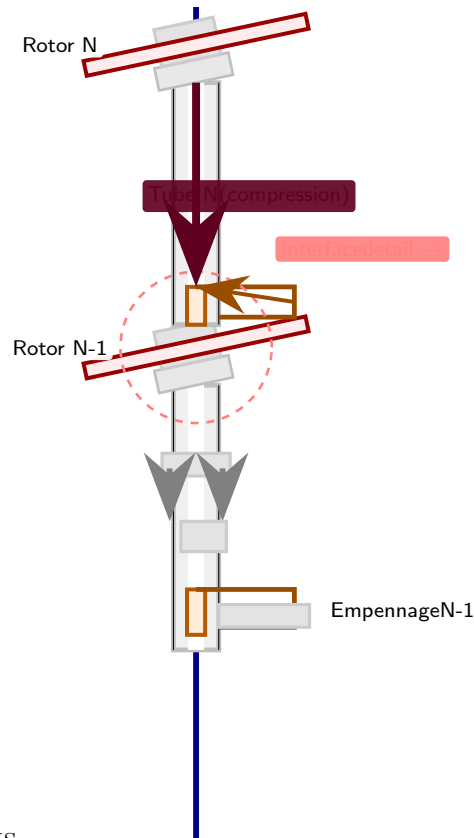


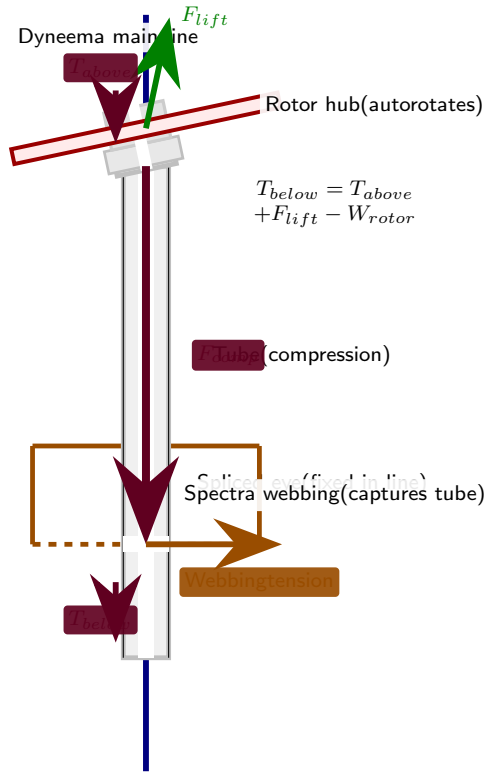

Key design features:

- Spliced eyes are **braided into** the Dyneema — no knots, no clamps, no abrasion
- Webbing (Spectra/Dyneema) passes through wall slots, captures tube axially
- Tube bottom bears on rotor bearing housing below — compression transfers
- Alignment pin prevents relative rotation between adjacent units
- At zero wind: tubes stay captured — no rattling, no sliding

socket

Interface Detail (4x scale)

Tube Capture: Spliced eye + webbing through wall slots

Stack Connection: Tube N sits on Rotor N-1 bearing housing