


Viability Heatmap: Tip Speed $\times$ Reynolds Number

BEM v2.1 — Viable Configurations Only

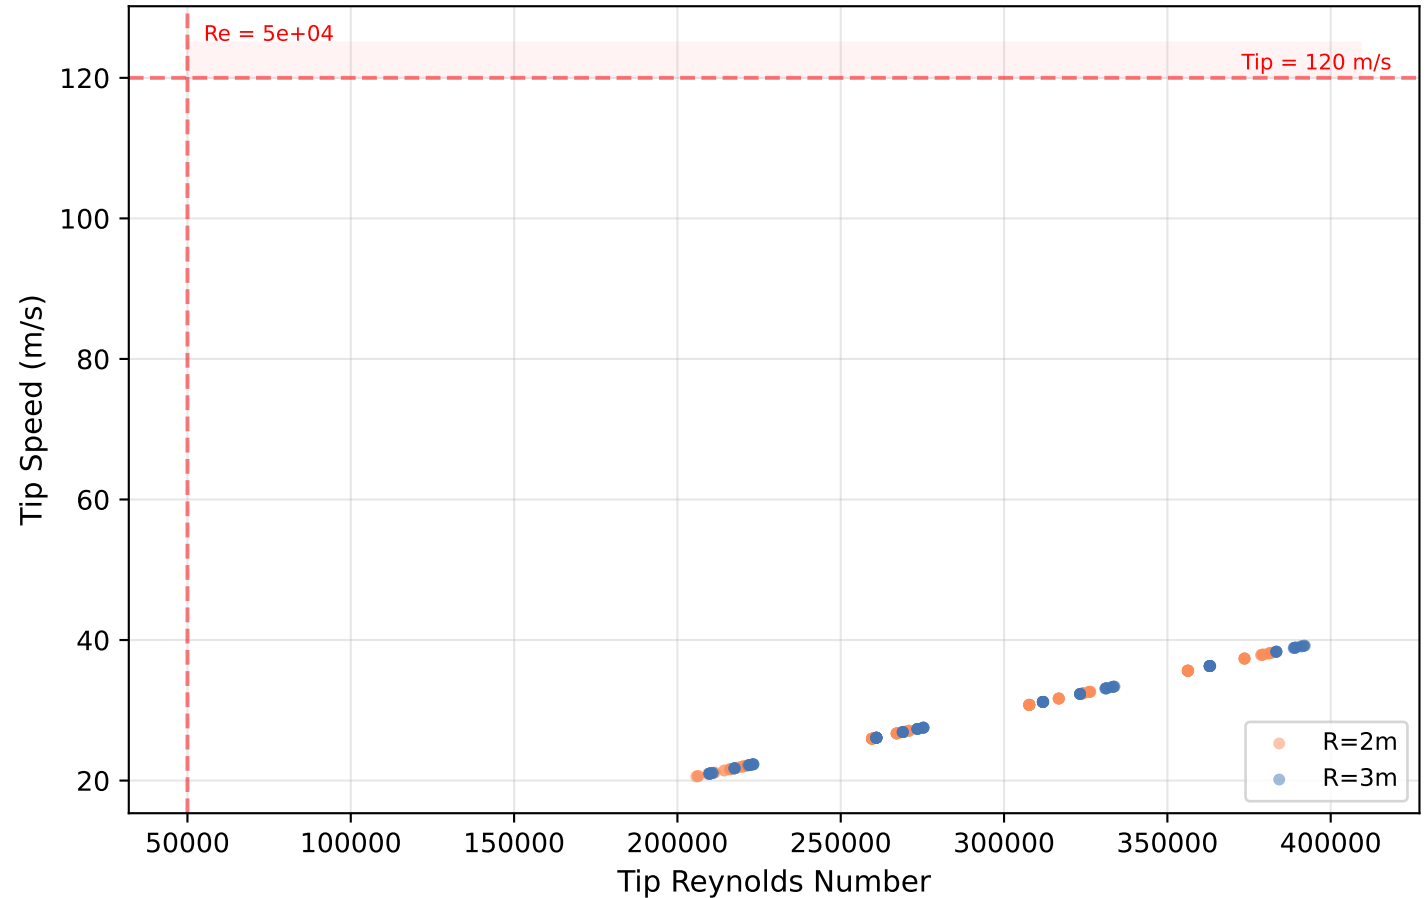

IMPLICATIONS: All viable configurations operate at $Re = 5e+04$ – $4e+05$ and tip speeds 2–40 m/s. The primary gap is $R=1.5\text{m}$ (not shown — zero tension, below Re threshold). $R=2.0\text{m}$ clusters at $Re \approx 2 \times 10^4$ (just above transitional) while $R=3.0\text{m}$ reaches $Re \approx 4 \times 10^4$. No configuration approaches the 120 m/s noise limit — autorotation is inherently quiet. Data: BEM v2.1.