


Reynolds Number Distribution by Rotor Radius BEM v2.1 — Viable Configurations

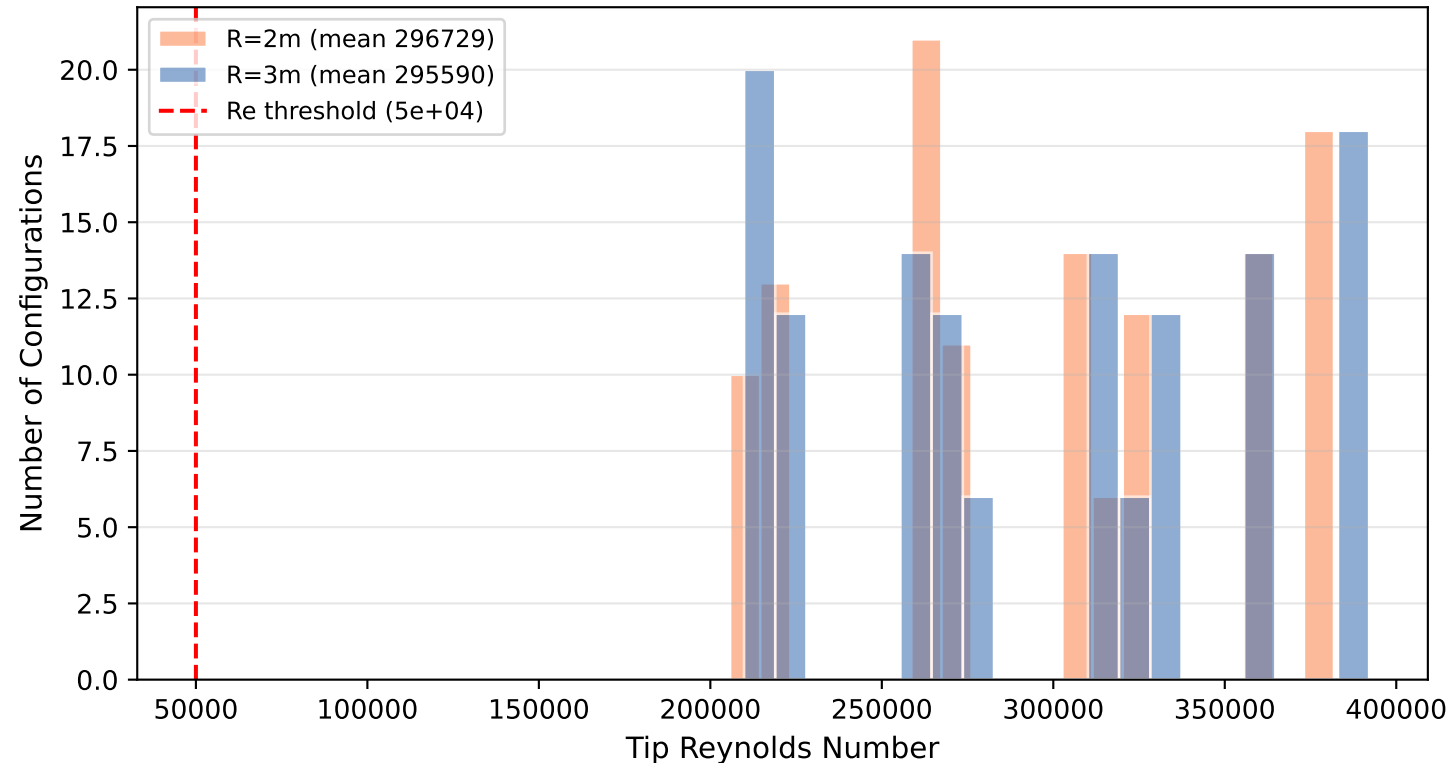

IMPLICATIONS: R=3.0m operates at $Re = 295590$ (mean), comfortably above the $5e+04$ transitional threshold. R=2.0m operates at $Re = 296729$ — marginal but viable at higher wind speeds. R=1.5m (not shown) produces zero tension across all conditions. The NACA 0012 data at $Re = 10^5$ is the lowest reliable table; below this, laminar separation bubble effects are unpredictable. Data: BEM v2.1, all wind speeds.