


Tip Reynolds Number — Viability Gate ($Re > 5e+04$)

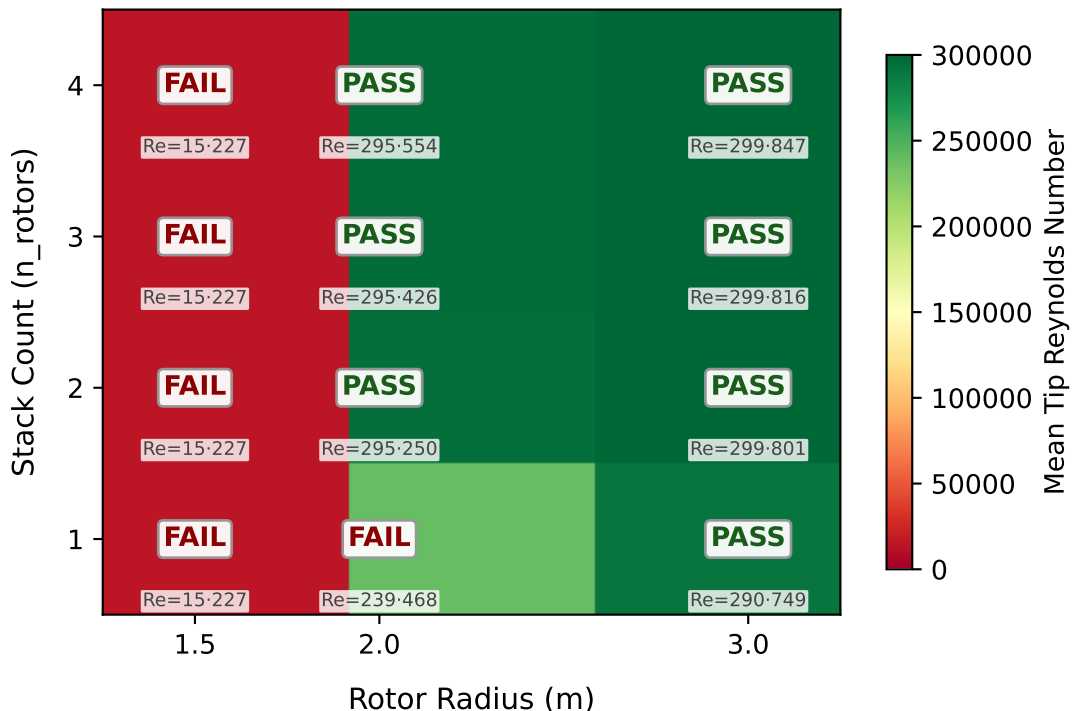

IMPLICATIONS: Larger rotors at higher stack counts push tip Reynolds above 5×10^4 — the transitional flow threshold. PASS = all wind speeds pass. FAIL = laminar flow at some speeds, airfoil performance degrades. Small-radius single-rotor configurations are physically non-viable under autorotation. Minimum viable product: $R \geq 2.0\text{m}$ or $N \geq 3$. Data: BEM v2.0, corrected polygon solver. See SPEC.md §6.6.