
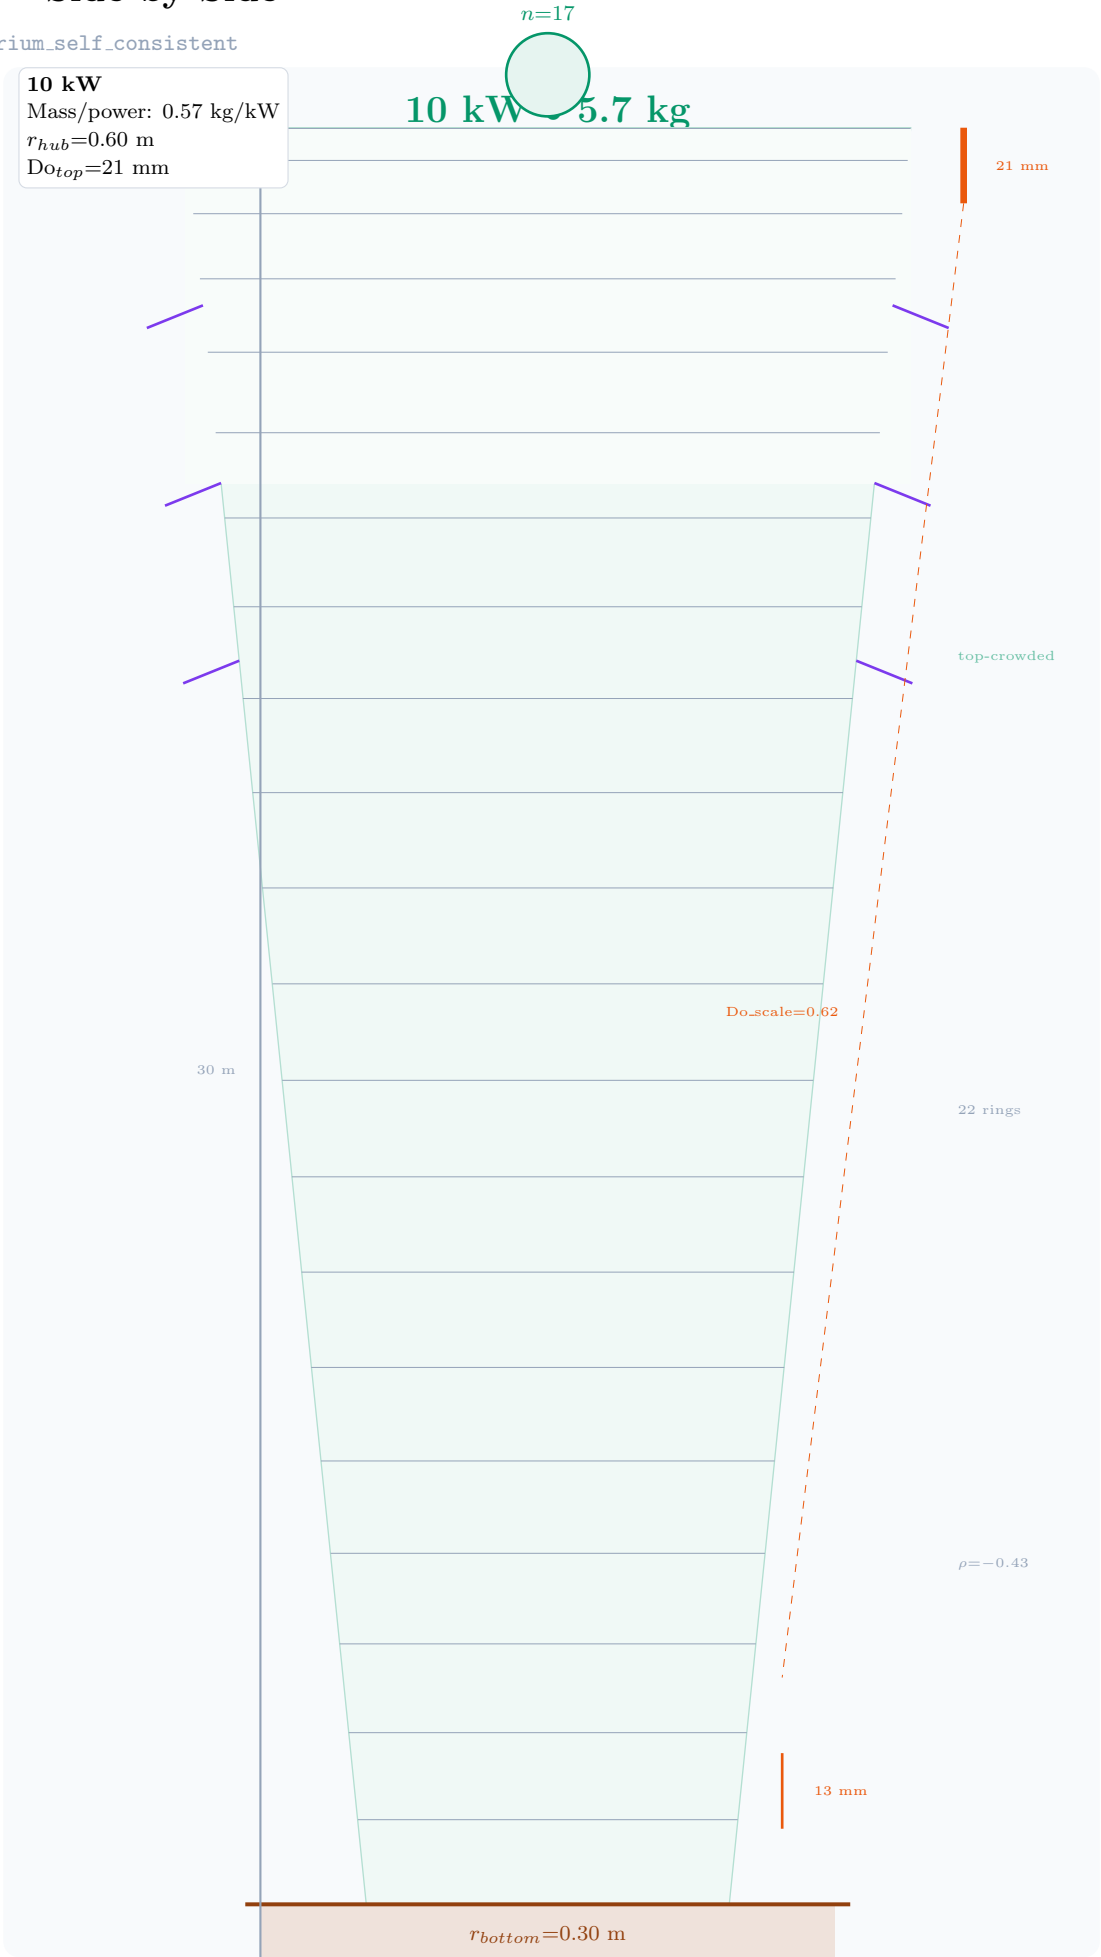


V9.0 Optimisation Winners — Side-by-Side

Dynamic equilibrium objective solve_equilibrium_self_consistent

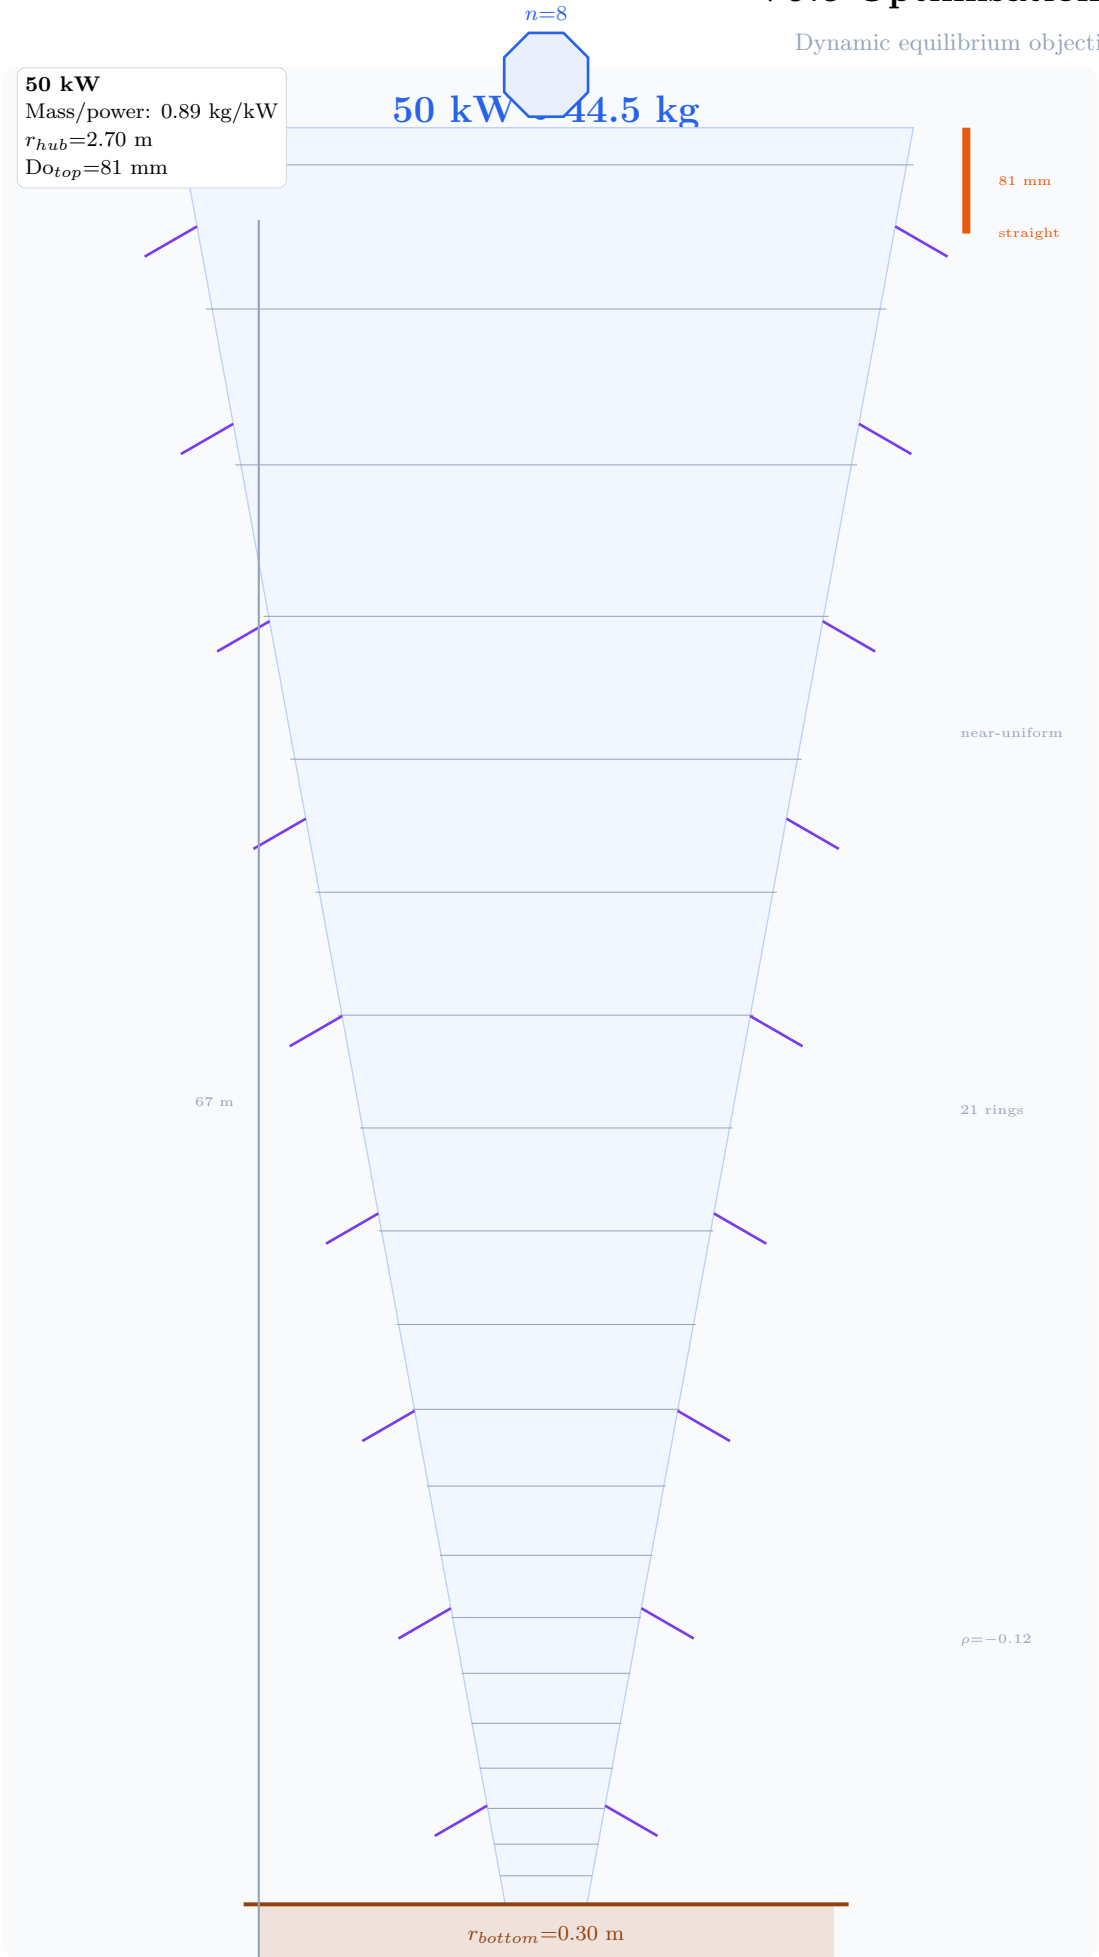

Two Strategies, One Physics

- 10 kW uses 2.1× more tether lines (17 vs 8)
- 3× fewer expansion rotors (3 vs 9)
- Tapered beams ($Do_{scale}=0.62$) vs straight
- Top-crowded rings ($\rho=-0.43$) vs near-uniform ($\rho=-0.12$)
- Mass/power: 0.57 kg/kW (10 kW) vs 0.89 kg/kW (50 kW) — 36% better
- Both pin $r_{bottom}=0.30$ m and $t/D=0.01$ at min bounds