

# Green communications in 5G

Tim Van Den Driesschen  
Rodrigo Arias Mallo

Universitat Politècnica de Catalunya

January 8, 2019

- Introduction
- Main challenges
- Network deployment
  - Challenges
  - Potential solutions
- Renewable energy sources
- Energy efficiency metrics
- Conclusions

- Meet the future requirements in an **affordable** and **sustainable** way
- In the next decade, the number of connected devices is expected to increase 100 times and the total data volume by **1000 times**
- Operators are already facing **significant power bills**
- Moving towards green communications is important both for **environmental** and **economic** reasons by **reducing CO2 emmissions** and **saving money**

One of the big challenges is to meet future requirements and expectations in an affordable and sustainable way. Low energy consumption is the key to achieve this. Already today, the mobile operator's energy bill is an increasing part of their OPEX (operational expenditure)

This is also important from a sustainability perspective; even though mobile communications today only contribute to a fraction of a percent of the global CO2 footprint [5], it is important to maintain or even reduce this in the future 5GrEEEn [6] is a joint effort of partners tightly connected to the METIS project representing the telecom vendor Perspective.

This paper takes as a starting point the situation of today and tries to pinpoint important focus areas when designing an energy efficient 5G mobile network architecture. The outline is as follows: After a more in-depth discussion on major challenges for mobile networks in the future, the important focus areas and some potential solutions are outlined. Finally, a summary and concluding remarks are provided.

- Challenges
  - Data traffic volumes
  - Number of connected devices
  - Diverse requirements of 5G
  - Energy consumption
- Potential solutions
  - Architectural design
  - Network deployment
  - Radio transmission
  - Backhauling solutions

Intro:


One of the big challenges is to meet future requirements and expectations in an affordable and sustainable way. Low energy consumption is the key to achieve this. Already today, the mobile operator's energy bill is an increasing part of their OPEX (operational expenditure)

This is also important from a sustainability perspective; even though mobile communications today only contribute to a fraction of a percent of the global CO<sub>2</sub> footprint [5], it is important to maintain or even reduce this in the future 5GrEEn [6] is a joint effort of partners tightly connected to the METIS project representing the telecom vendor Perspective.

This paper takes as a starting point the situation of today and tries to pinpoint important focus areas when designing an energy efficient 5G mobile network architecture. The outline is as follows: After a more in-depth discussion on major challenges for mobile networks in the future, the important focus areas and some potential solutions are outlined. Finally, a summary and concluding remarks are provided.

## Challenges: Data traffic Volumes


- Today: 2 billion mobile broadband subscriptions
- Exponential growth in the following years
- A factor of 1000x capacity demand in 2020 vs 2012
  - Growing amount of users (10 times)
  - Growing amount of data rates per user (50 - 100 times)
- Growing energy needs

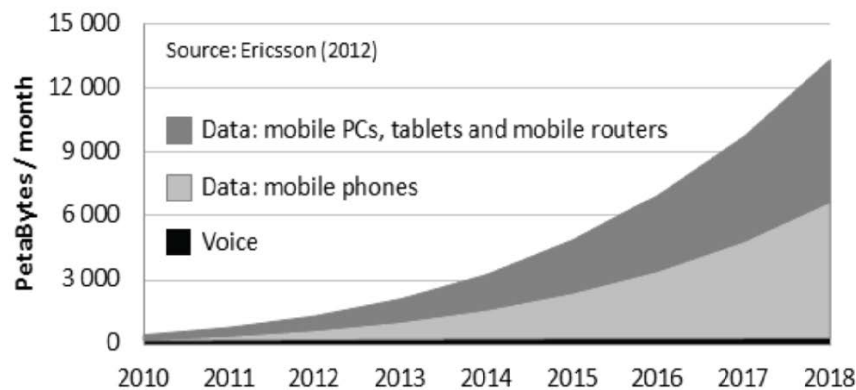

Data traffic volumes: Some of the challenges with regards to energy consumption is the growing amount of data traffic. Today, there are over 2 billion mobile broadband subscriptions worldwide, a figure that has grown by 40 percent annually over the last six years. Furthermore, forecasts predict that data traffic volumes will experience an exponential growth in the coming years [2], as illustrated in Fig. 1. For example, it can be seen that the data traffic volumes are expected to increase more than 10 times between 2012 and 2018. Predictions are made that per-user data rates are expected to grow by a factor of up to 50-100; on the other hand, the density of mobile Internet users is expected to increase by a factor of up to 10, implying a factor of 1000x capacity demand in the 2020 time frame. Hence, it is obvious that mobile systems in the future need to be capable of delivering significantly more capacity than today. In fact, up to now mobile networks were dimensioned by taking into account the peak capacity. With this approach, the exponential growth rate will imply a costly network deployment. Instead, evolved mobile networks should satisfy the increasing traffic demand by a flexible availability of capacity (in time and space) in order to sustain the data rate development that has been observed during recent decades.

## Challenges: The number of connected devices

- Today: 7 billion mobile devices that are connected to the internet
  - Future: All connected through 5G connections
- Smart devices (smart grid, sensors and surveillance camera's)
- Internet of things (IoT)

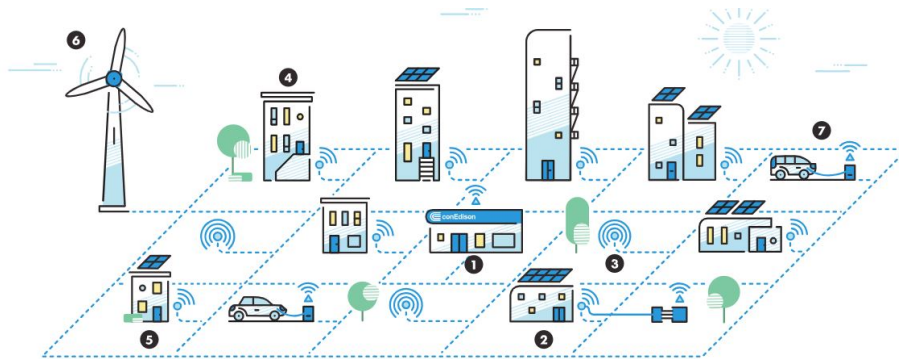

Today, there are almost 7 billion mobile subscriptions, and thereby wireless connected devices, worldwide.

However, in the future, this is predicted to change, as different kinds of machines such as smart grid devices, sensors and surveillance cameras will be connected to the networks.

This is usually referred to as Internet-of-things [3] or machine-to-machine (M2M) communication, and means that everything that can benefit from a wireless connection will have a wireless connection

## Challenges: Diverse requirements

- Different applications of 5G
  - Low latency
  - High reliability
  - Different data sizes (e.g. security cameras (large) and temperature sensor (small))
  - Varying quality of service (QoS) requirements
    - Green energy should not have a negative impact on the QoS



Challenges: 5G will include a myriad of applications with a wide range of requirements and characteristics.

Some applications may require low latency, for example, time-critical control functions in industrial applications. The same type of applications typically also require very high reliability, while others such as simple sensors can have lower reliability requirements. Certain applications such as surveillance cameras may have to convey enormous amounts of data while others have very small data amount to send.

varying quality-of-service (QoS) requirements. This may have a significant impact on the green design, as the minimization of network power consumption, should not have impacts on the correct and efficient management of the QoS in the system.

- Operational expenditure (OPEX)
- The energy consumption should at least be kept at the same level as today
  - Increasing number of devices
  - Increasing number of traffic
  - New requirements


Challenges: Energy consumption: Already today, the mobile operator's energy bill is a substantial and increasing part of their OPEX, The energy consumption should at least be kept at the same level as today (despite the traffic growth, the massive amount of devices, and new requirements) The EARTH project showed that it is possible to cut the energy consumption of LTE by a factor of 4 with a 2012 baseline [10].

5GrEEEn will target a factor of 10 lower energy consumption compared to today while fulfilling the requirements stated in the previous subsections.



## Potential solutions: Architectural design

- Architectural design
  - An energy efficient system needs to be efficient both when transmitting data as well as when we are not transmitting data
  - logical separation between idle mode functions and user plane data transmission
- Dynamic cells with reconfigurable antenna systems

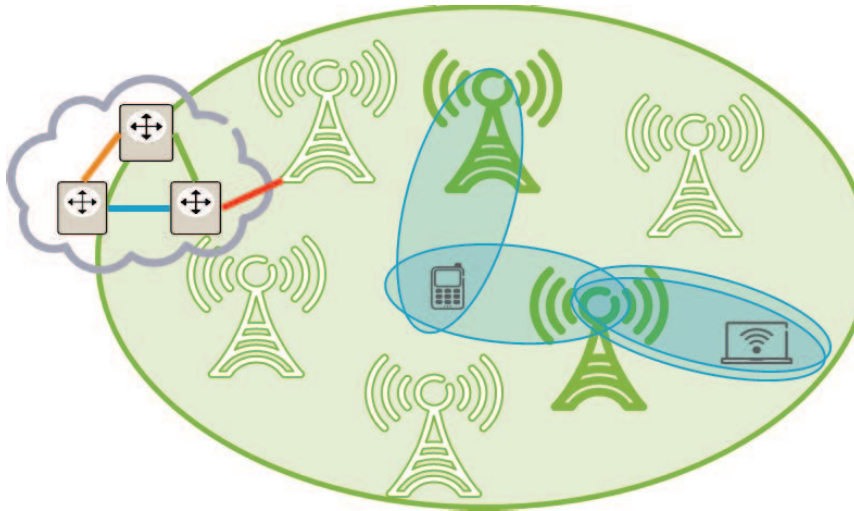

Challenges: Equations: An energy efficient system needs to be efficient both when transmitting data as well as when we are not transmitting data.

To do this, we will assume a logical separation between idle mode functions (such as the transmission of system information) and user plane data transmission and reception, see Fig. 2. In this architectural design, cells can be viewed as UE specific resources for data transfer that are dynamically created and configured to support only the currently active UEs.

Moreover, an access point may be utilized by more than one cell. Also, a dynamic cell may fully utilize a reconfigurable antenna system (using e.g. beam-width and tilt optimization) at the access point(s) in order to shape the coverage in the best way.

The control plane carries control information (also known as signalling); the user plane carries the network's users' traffic; the management plane carries the operations and administration traffic required for network management. Broadcast of system information also belongs to the management plane. By separation of the network into these planes we facilitate e.g. independent utilization of access points by the planes, i.e. a given access point may be used by a subset of the planes. Hence independent deployment of the different plane entities can be done at the most energy efficient location.


## Potential solution: Network deployment

- An increasing amount of base stations (BS) is used to cope with the increasing demand of high speed mobile networks
  - Increasing amount of energy consumption
  - 70-80 % of energy is used by base stations
- Energy aware Heterogeneous network (Het-Net)
  - Mix of cell shapes and sizes
  - Macro and micro BS
  - Micro cells can offload macro cells → reducing energy consumption
  - Macro cells are responsible for basic coverage
  - Micro cells provide higher data rates to nearby users
- Deployment is interesting in places where high data rates are needed (e.g. Shopping malls and train stations)
  - Indoor places
  - Energy savings due to avoidance of power consuming wall penetration


Base stations are deployed because of the growth of the telecommunication industry. However, this hike in the deployment of base stations will lead to immense energy consumption, because in mobile networks 70–80 % of the power is consumed by base stations (BSs). This means an increase in CO<sub>2</sub> emissions in the environment. In addition, energy bills represent a major chunk of the cost for wireless operators. Therefore the development of 'energy-aware Heterogeneous Networks (Het-Nets)' are increasing. Het-Nets are a mix of various cell shapes and sizes. Including Macro and micro cells. By choosing the location of the microcells and relays optimally within the range of a macro cell, they can significantly offload the macrocell and produce energy savings while providing better coverage. Macro cells are responsible for the basic coverage of the cell users, and the small cells are effective in providing higher data rates to their nearby users in dense areas with reduced power consumption.

These optimizations are especially efficient in areas where extremely high capacity and data rates are needed like offices, shopping malls, subway stations, etc., where the user density is large. Since most of these places are indoor, indoor access points should be deployed so that energy wastage due to wall penetration can be avoided.

# Potential solution: Heterogeneous networks

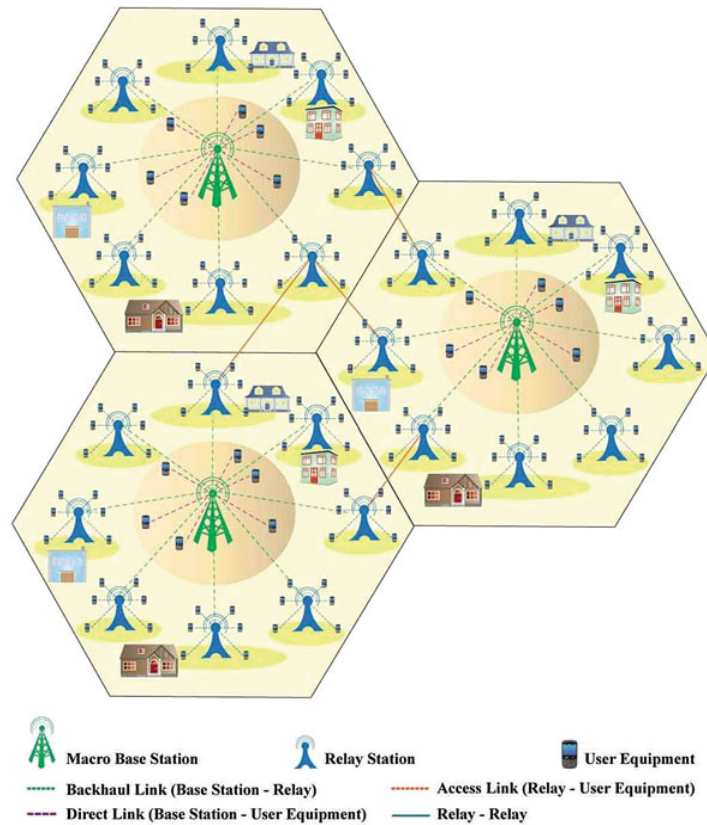


## Potential solution: Heterogeneous networks

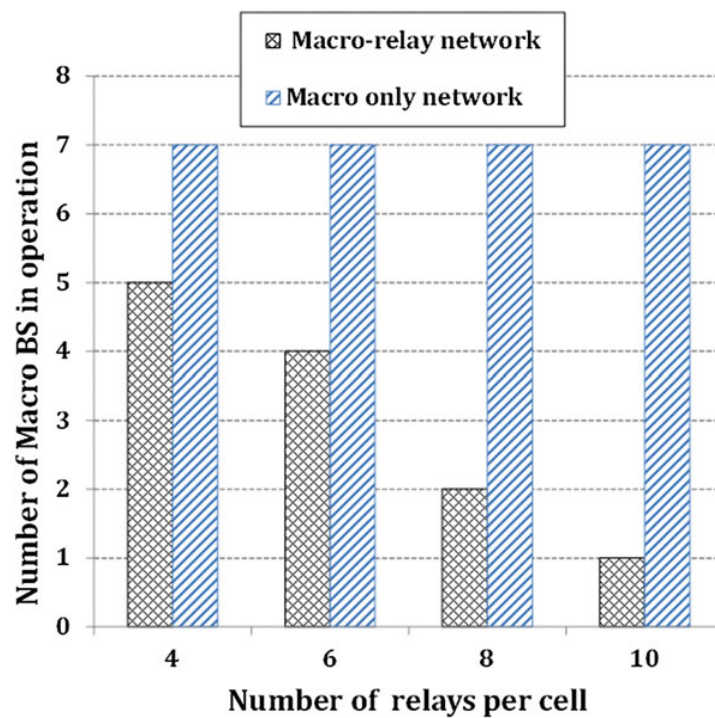

The number of active macro cells decrease when more micro cells are used allowing for the macro stations to go to sleep more often for more time, and thus decreasing the overall power usage

## Potential solution: Heterogeneous networks

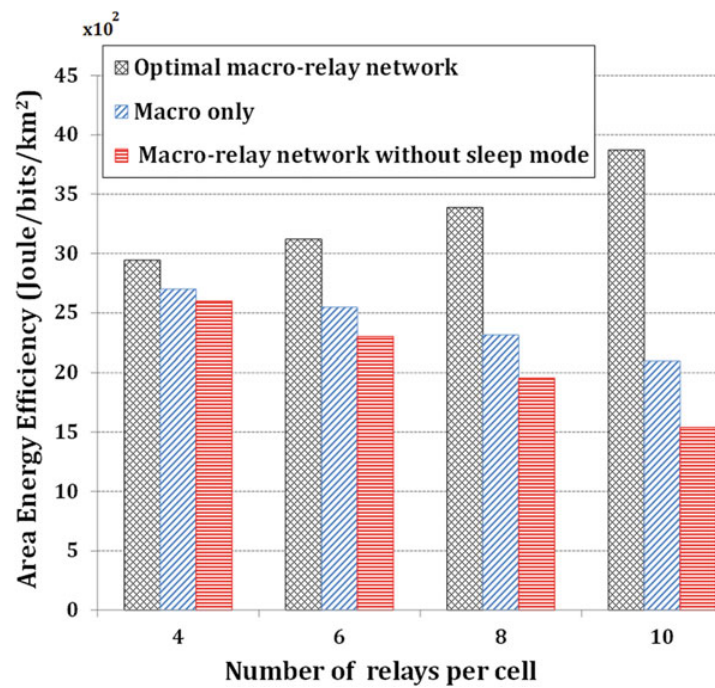

The more micro stations are used in the network the more power can be saved. This is due to the fact that the micro stations are being used for micro to micro communication bypassing the macro stations allowing the macro stations to sleep

## Potential solutions: Radio Transmissions

- Avoid sending signals in directions with no receivers
- Multiple-input multiple-output (MIMO) transmission
- Beam forming
- MIMO → Will boost peak data rates
  - Boost peak data rates
  - Higher data rates mean more time to sleep
  - Higher data rates mean less base stations are necessary



As already mentioned in the system architecture section above, an energy efficient system needs to be efficient both when transmitting data as well as when we are not transmitting data. In order to be energy efficient when transmitting data, all we need to do is to “send the packet to the receiver”. We should do it quickly and we should try to avoid sending signals in directions that do not reach the receiver.


Multiple-input multiple-output (MIMO) transmission which allows both multi-layer transmission for increased data rates, and beam forming to a certain extent. We believe that the MIMO technology has further potential. Recently, massive antenna configurations, or very large MIMO, have gained increased interest.

MIMO will further boost peak data rates and system capacity, which can benefit energy efficiency in two ways; higher peak data rates mean more time for sleep, higher system capacity means that a future traffic demand can be served without a corresponding densification of the network.

Such high gain beamforming, in combination with the system architecture solutions mentioned above, can allow increased inter-site distances with maintained system capacity, which of course is beneficial from an energy efficiency point of view.

## Potential solution: Backhauling

- Trade-off between power saved by using small and low power base stations and the baseline power that has to be spent to backhaul their traffic

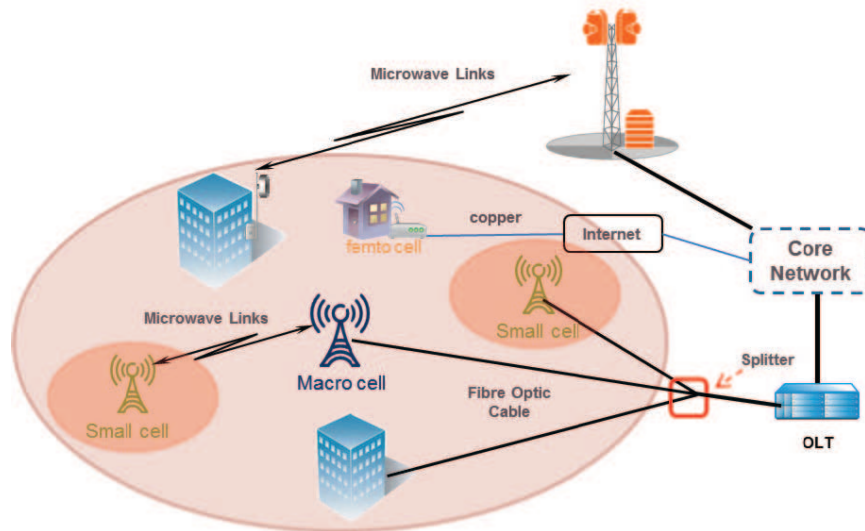


Backhauling Solutions Despite the relative scarce attention paid to the role of backhaul in optimizing the overall power budget of mobile radio networks, recent studies have highlighted its remarkable impact especially when heterogeneous deployments are considered [18]. The results showed that there is a trade off between the power saved by using small and low power base stations and the baseline power that has to be spent to backhaul their traffic.

In 5GrEEEn, we will tackle these questions and study various existing and future backhaul technologies. We will consider the advantages/disadvantages of different backhaul technologies, e.g., microwave, fibre, copper, for different deployment scenarios as shown in Fig. 4. For example, fibre-based backhaul has higher CAPEX and longer deployment time but offer long-term support with respect to increasing capacity requirements. Microwave is an appealing solution due to its quick and relatively cheap deployment potential. On the other hand, there is still a great interest in copper based solution in order to increase their capacity so that the existing infrastructure can still be exploited at its maximum. Therefore, a “one solution fits all” may not be viable.

The result of a mix of fiber, microwave and copper, depending on several factors, e.g., existing infrastructure, spectrum and license costs, availability of equipment, operator business modeling, and QoS level to be provided. With this knowledge, it will also be possible to define new and holistic wireless deployment strategies tailored for specific back haul architectures to avoid the bottleneck in the back haul power consumption.



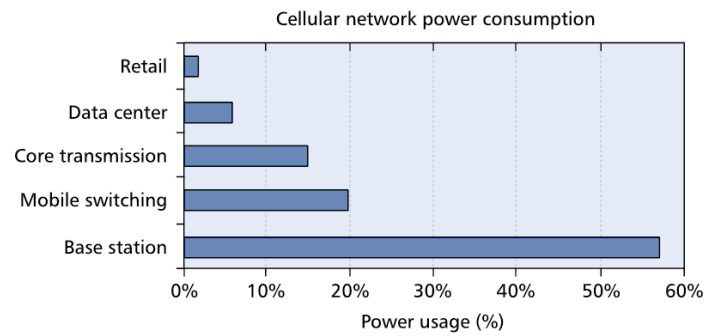

- The base station is the most power intensive element (more than 50%).
- Also the usual lifetime is around 10–15 years, while smartphones is only 2.
- By reducing the power consumption of the largest element, the whole consumption is reduced.



In order to power the Base Stations (BS), energy can be obtained from renewable sources:

- Natural sources: Sun, wind, vibration
- External: Batteries, fuel cells

Solar energy has been studied in UK cities, in order to power BS installed in road lamps, with a solar panel on top [175]. It has been observed that it can run fully autonomous, with the exception of the January month, where external power was needed.

Other sources of energy may not be so profitable, as sun is the source with the highest amount of power, about  $100 \text{ mW cm}^{-2}$ , followed by the wind with  $12 \text{ mW cm}^{-2}$ .

Source	Irradiance	
Solar	Outdoor (solar noon)	100 mW/cm <sup>2</sup>
	Outdoor (cloudy)	10 mW/cm <sup>2</sup>
	Indoor	10–100 $\mu$ W/cm <sup>2</sup>
Wind	10 miles Class 7	12 mW/cm <sup>2</sup>
Thermo-electric	5°C gradient	40 $\mu$ W/cm <sup>3</sup>
RF	ambient	1 $\mu$ W/cm <sup>2</sup>
Vibrations	Piezoelectric-shoe inserts	330 $\mu$ W/cm <sup>3</sup>
	Electrostatic @ 105 Hz	0.021 $\mu$ W/mm <sup>3</sup>
	Electromagnetic @ 10 Hz	184 $\mu$ W/cm <sup>3</sup>
	Electromagnetic @ 52 Hz	306 $\mu$ W/cm <sup>3</sup>

**Table 1.** Power densities of energy harvesting technologies.

Other sources of energy are shown in the table, but we observe the best ones are the solar and wind, with orders of magnitude far from the rest.

- Bursty traffic cause devices to change state between idle and connected with the associate **power consumption**
- Significant **overhead** with small packets
- Contention based method have been proposed

Expand based on reference 178

## Uplink contention based methods

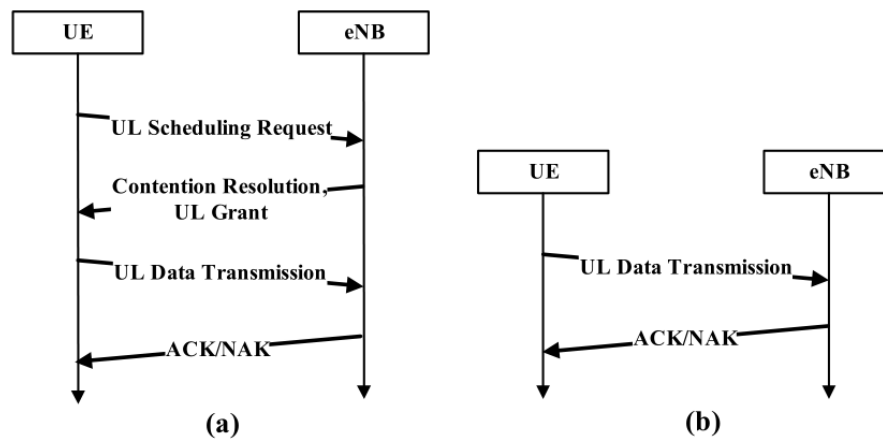


Figure 2: Data reporting via optimized Random Access procedure.

- Small signalling payload
- Direct small data packet

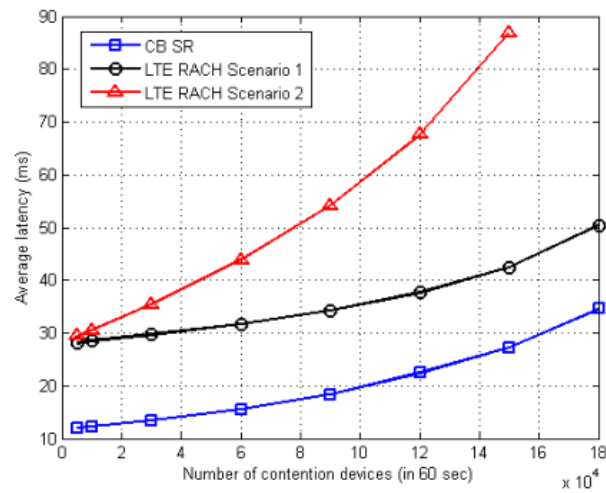


Figure 6. Latency performance improvement by proposed CB SR

- Power control: max power BS, sunlight.
- Energy efficient hardware: transceivers
- Energy efficient network architecture: SDN, NFV, data/control plane
- New battery technologies: sugar bio-batteries<sup>1</sup>, photo-MFC

---

<sup>1</sup>Following [183] paper in depth: *A high-energy-density sugar biobattery based on a synthetic enzymatic pathway*

There are some challenges to be resolved.

- Power control
  - In multi-tiered networks, the user is not connected to the BS with maximum power.
  - Solar and wind energy harvesting can be unfeasible in dense localities and where sunlight is not available.
- Energy efficient hardware
  - Current transceivers are energy costly, as they are designed for good throughput.
- Energy efficient network architecture
  - Multiple technologies as MIMO, SDN, NFV, D2D, cloud computing...
  - Separation of control and data planes
- New battery technologies: sugar bio-batteries, photo-MFC
  - Based on enzymes that extract energy from sugar, similar to humans.
  - Moss can also be used to harvest solar power
  - Still with a low efficiency to be used.



- The typical density of energy of a Lithium cell is around  $0.54 \text{ MJ kg}^{-1}$
- But the combustion energy of glucose can release up to  $15.5 \text{ MJ kg}^{-1}$
- Sugars are non toxic, safe and carbon neutral


The energy per Kilogram stored in a lithium cell is about 2 orders of magnitude below the available energy in an equivalent sized glucose cell. Experiments with bio-batteries seem to have a suitable position as power cells, however the research is in an early stage of development.

- Maltodextrin (food additive), produced from starch.
- Sugars are non toxic, safe and carbon neutral
- The lifetime of enzymes is very short (weeks)
- They have to be recharged regularly.

The main idea of the cells, is as follows. The sugar is used as fuel, some enzymes are used to transform the glucose into other compounds, while energy is released in form of electric current.

Those cells are able to work for long periods with a suitable flow of glucose-like input stream. The enzymes used for the transformation of sugar are non toxic, are easy to obtain, they don't need any exotic metal nor element.



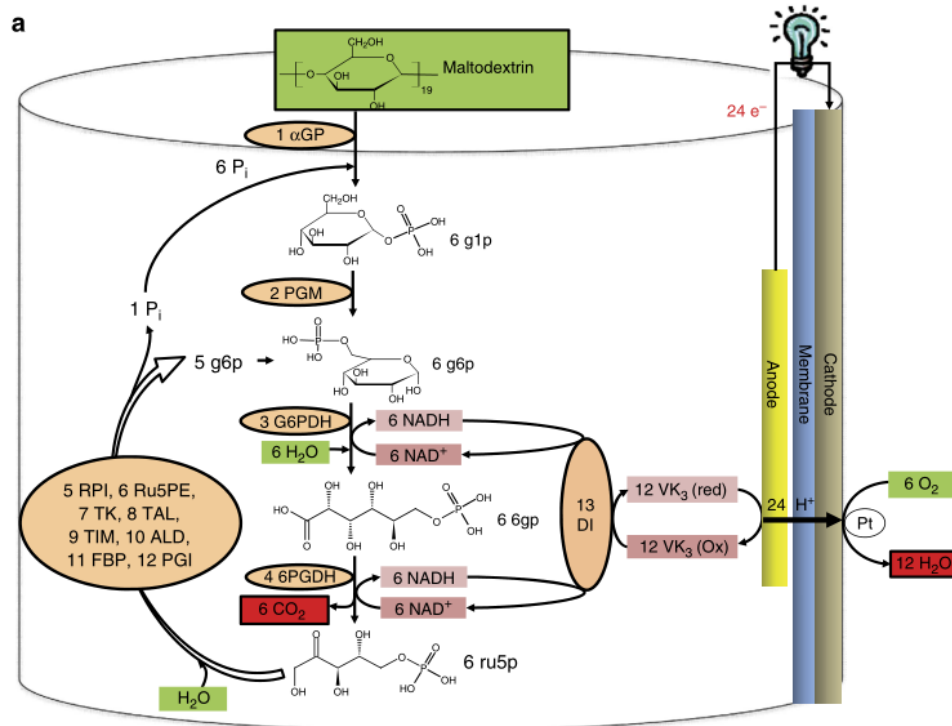

With a suitable input stream of sugars, those cells can keep producing a long term power output. The two electrodes placed close to the chemical reaction obtain the electric energy directly from the enzymes.


- We need some way to compare energy efficiency (EE), but which metric is more suitable?
- Output energy/input energy?
- Performance/energy consumption?
- What load should we use for the measurement?
- Accuracy?

In order to obtain an meaningful comparison of different technologies used in electronic communications, some metrics should be established so we can compare the energy efficiency.

Some candidates as the output power by the input power are useful when we can measure the power, but some times other measurements are more interesting. For example if we look at a processing unit, we may be interested in the performance per watt.

The base stations can operate at different loads, and the metric should include information of the load to be compared. Also the accuracy of the metric should be taken into consideration, as it may include information of fluctuations when the system is under operation.

We will focus on the metrics used at different levels of abstraction, starting from the lowest part, the component level, to the uppermost, the network level.

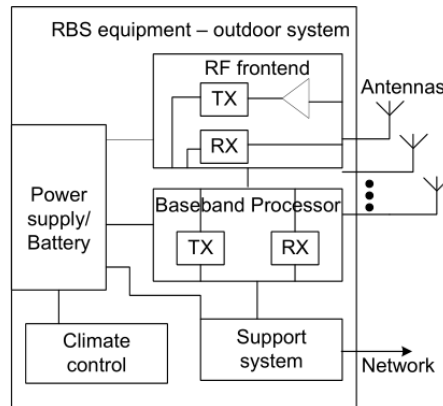

- The components are analyzed by parts
- Example: The efficiency of the antenna as the input power that it receives compared with the irradiated power.
- On the baseband processor, EE is measured as performance per unit of energy consumption.
- For the power supply, output power/input power, often higher than 85%

A general model is commonly used, as the one in the figure, to understand the different parts of a system. In each part we can identify and measure the efficiency based on specific metrics.

In the case of a radio base station, which may include one or more antennas, the efficiency can be expressed as the ratio of the radiated power  $P_r$  to the input power  $P_i$ ,

$$\eta = P_r / P_i$$

Whereas, in a baseband processor we are interested in the performance per watt, which can be measured by means of MFLOPS or MIPS which often can be expressed in equivalent MOPS (millions of operations per second). The power supply is normally measured in terms of electrical efficiency, with the ration of output power by input power, often higher than 85%.

- Power is computed by each load level (high, med, low).
- Power supply correction factor and cooling factor.
- Energy consumption rating: Power/effective throughput.

The power consumption can be sampled at different load conditions, for example high or busy hour, medium and low usage. Then the power consumption is averaged with the time of each load estimation, giving a more realistic power consumption.

Both the power supply and cooling factor are unit specific and can be used to correct the estimated power usage.

The European Telecommunications Standards Institute (ETSI) doesn't provide an energy efficiency metric for radio base stations, but the Energy Consumption Rating (ECR) initiative proposes the power consumption  $P$  by throughput  $T$  in bits per seconds,  $ECR = P/T$

- Rural, cellular: Coverage area/average power consumption
- Urban: Subscribers/average power consumption
- Error correction: transmitter power/bit rate

Wireless systems like cellular networks are deployed with careful network planning. Coverage area in rural areas should be considered, whereas in urban areas we often exceed the capacity of the systems.

For the rural and cellular networks, the following EE metric can be used: The area of coverage  $A$  by the power consumption  $P_c$ , defined as  $P = A/P_c$ .

However for a urban network, we may be interested in the number of subscribers  $N$  by the power consumption  $P_c$ , defined as  $P = N/P_c$

On the other hand, the usage of error correcting codes can have an impact in the energy consumption. The EE metric  $E = P/C$  is based on the transmitter power  $P$  and the bit rate  $C$  of the channel.

- 5G communications are possible: open problems have potential solutions.
- New technologies and research is still needed.
- Energy efficiency can be improved by several methods.
- Standardized metrics lead to reasonable comparison of efficiency.

While the development of 5G communications seem daunting at least, the presented open problems have multiple potential solutions. It is expected that more research is required to implement them, while we develop new technologies.

In order to reduce the energy usage, we have seen different energy harvesting methods as well as energy efficient systems, designed to keep our CO<sub>2</sub> footprint at minimum.

With the standarization of new metrics for energy efficiency, we expect more competitive hardware to be replaced in the coming years.

- 5G roadmap: 10 key enabling technologies. *Ian F. Akyildiz, Shuai Nie, Shih-Chun Lin, Manoj Chandrasekaran*
- 170 5GrEEEn: Towards Green 5G Mobile Networks. *M. Olsson, C. Cavdar, P. Frenger, S. Tombaz, D. Sabella, R. Jantti*
- 171 Towards Energy-Aware 5G Heterogeneous Networks. *Hafiz Yasar Lateef, Mischa Dohler, Amr Mohammed, Mohsen Mokhtar Guizani and Carla Fabiana Chiasserini*
- 175 Solar Energy Empowered 5G Cognitive Metro-Cellular Networks. *Syed Ali Raza Zaidi et al*
- 178 Uplink Contention Based Multiple Access for 5G Cellular IoT. *Dr Debby Lin, Dr Gilles Charbit, Dr I-Kang Fu*
- 179 Energy Efficiency Metrics For Green Wireless Communications. *Tao Chen et al.*
- 181 Green Radio: Radio Techniques to Enable Energy-Efficient Wireless Networks. *Congzheng Han et al.*
- 183 A high-energy-density sugar biobattery based on a synthetic enzymatic pathway. *Zhiguang Zhu et al.*