


ArUco 4x4_50 id 0 - VIO ground truth

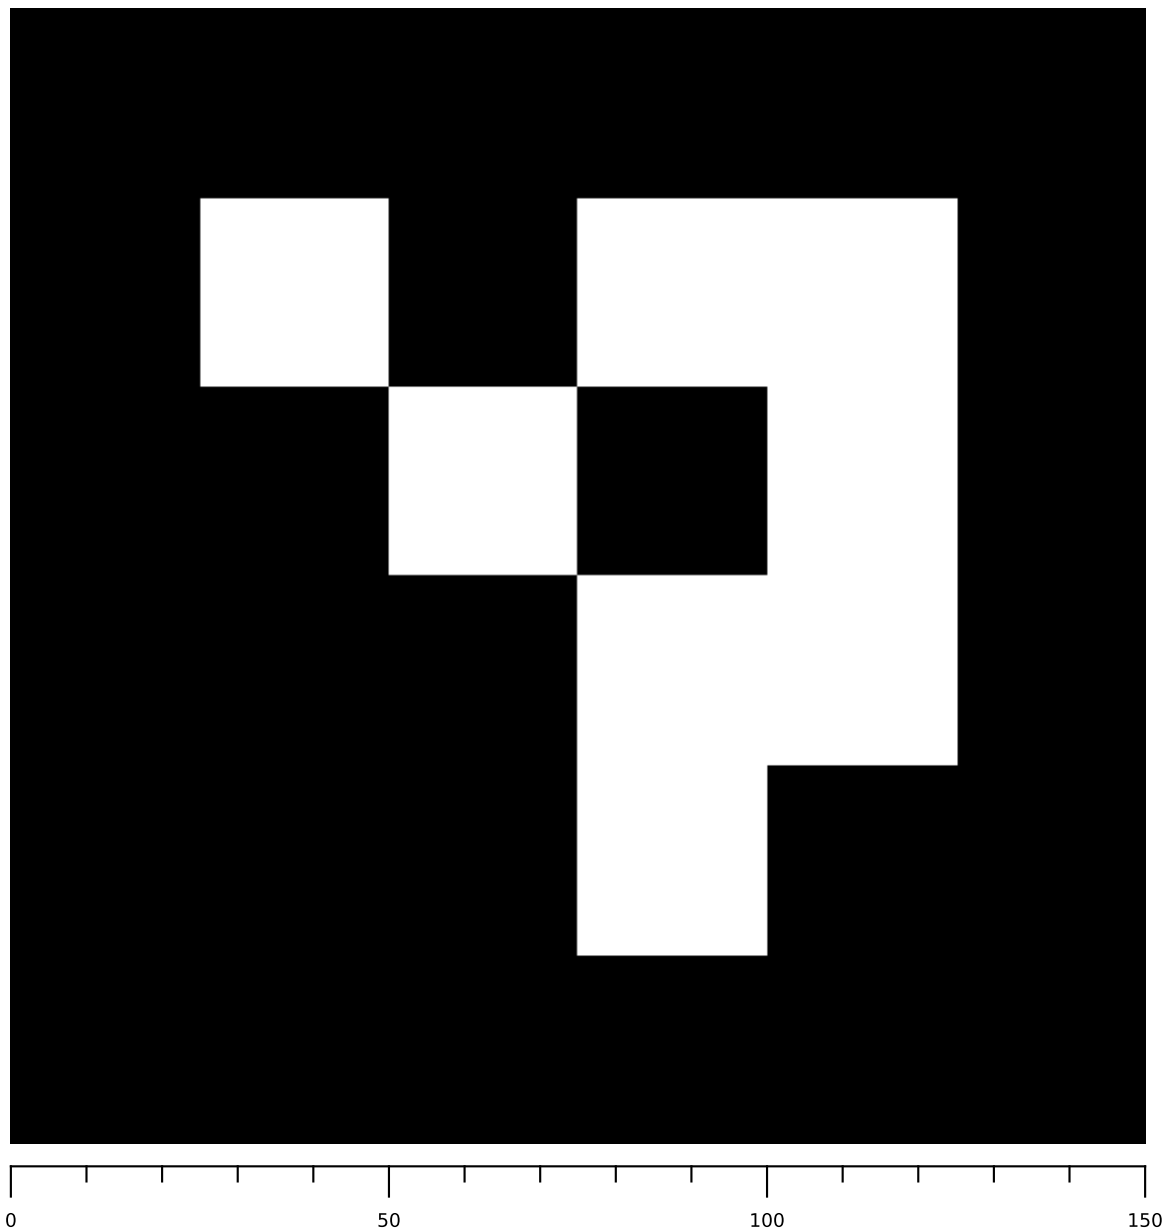


MEASURE the black square. It should be 150 mm.

Pass what you actually measure, in metres, as marker_size_m.

Tape flat to a wall. Mount it so the drone sees it AT AN ANGLE, not dead-on (head-on views are rotationally ambiguous).

PRINT AT 100 % SCALE - disable 'fit to page' / 'shrink to fit'

Camera calibration target

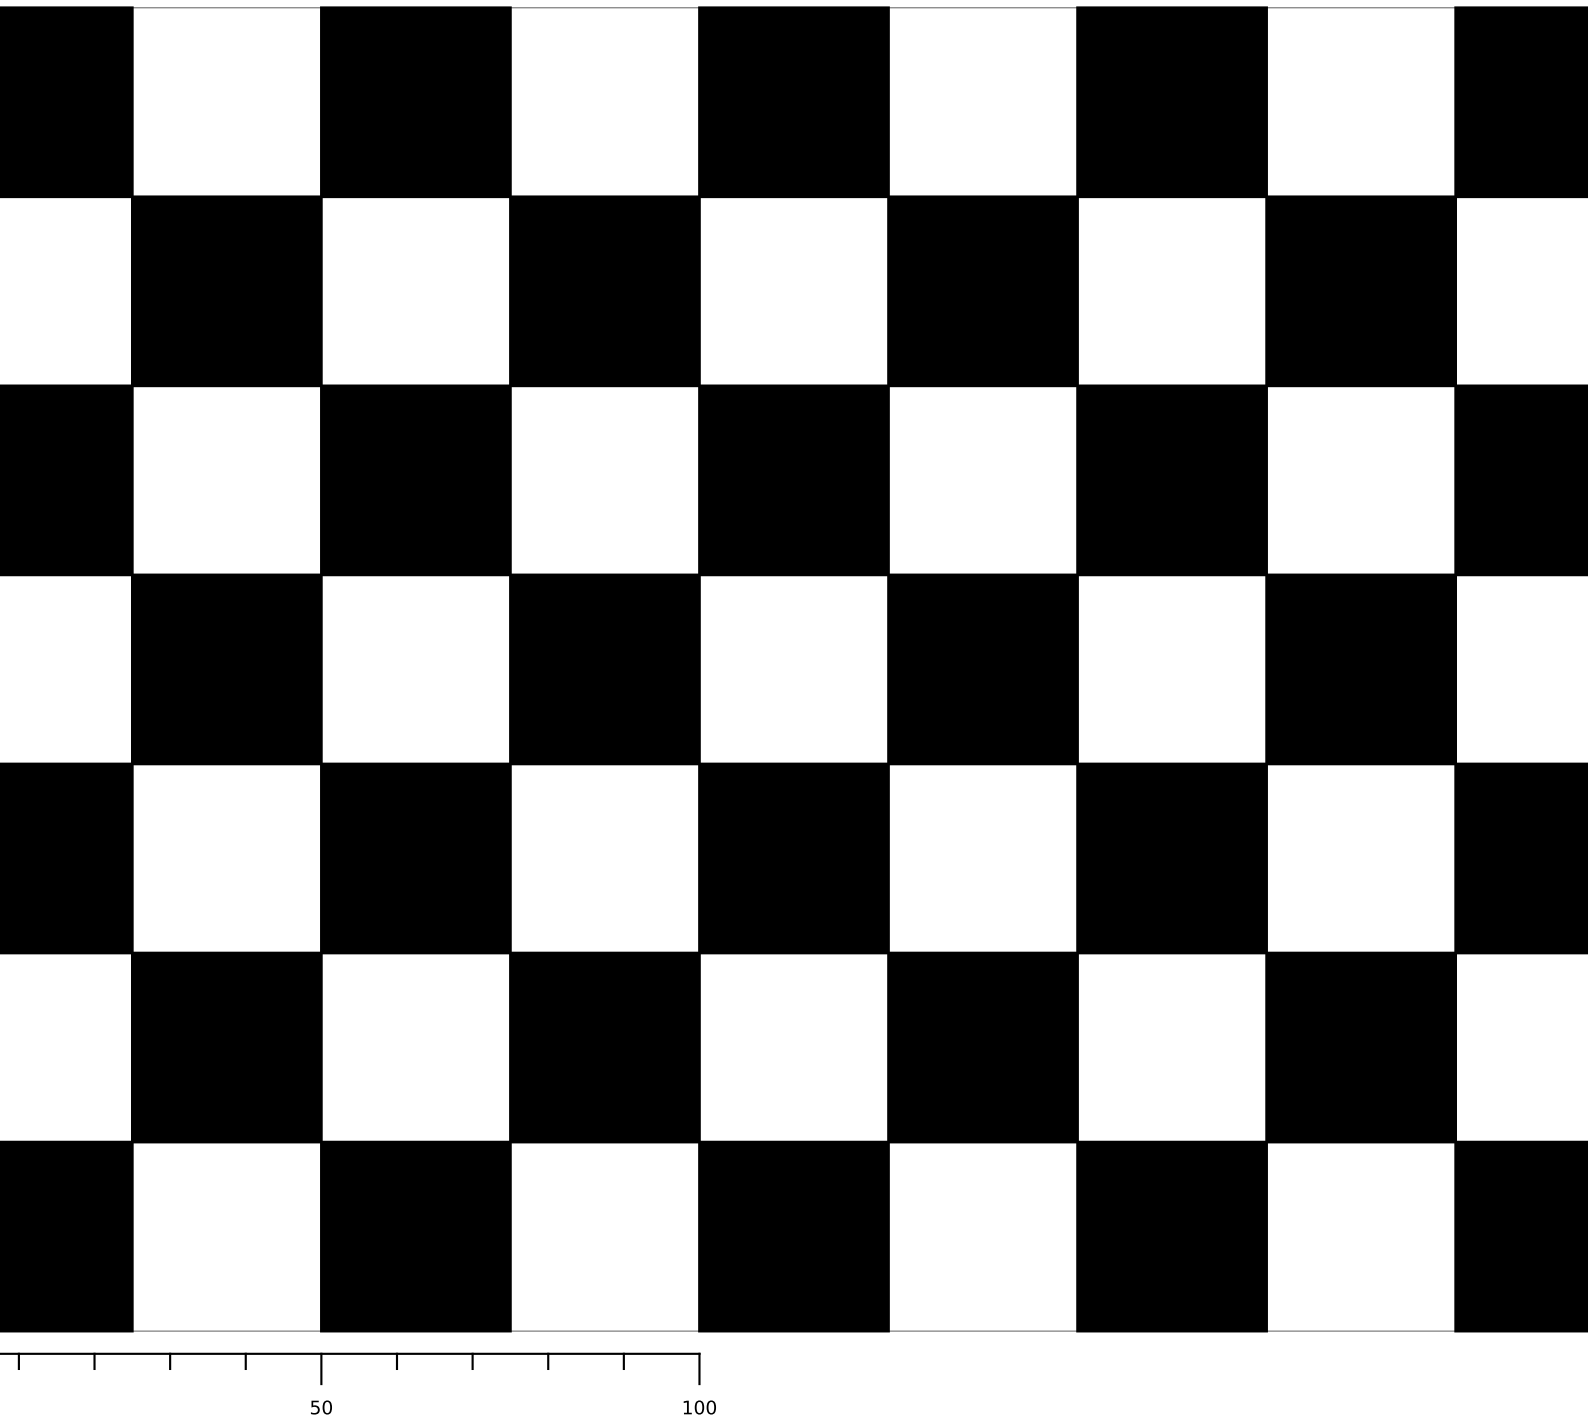

MEASURE one square. It should be 25 mm.

9x7 squares => --size 8x6 (the tool wants INNER CORNERS, not squares)

```
ros2 run camera_calibration cameracalibrator --size 8x6 --square 0.025 \  
image:=/image_raw camera:=/camera
```

Hold it flat and rigid - tape it to card. A bent board silently corrupts the calibration.

PRINT AT 100 % SCALE - disable 'fit to page' / 'shrink to fit'