

Entrance Exam for MPSP Applicants

Third harmonics can be generated by pumping Ti:sapphire laser femtosecond pulses into an Ar-filled hollow-core photonics crystal fiber (HC-PCF) [5]. In this work* we discuss several aspects of their generation and analysis.

1. Derivation of Effective Refractive Index

The effective refractive index of the generated modes within the HC-PCF can be approximated by:

$$n^{mn}(\lambda, p) = \sqrt{n_{\text{Ar}}^2(\lambda, p) - \frac{u_{mn}^2}{k_0^2 a^2}} \quad (1)$$

where $k_0 = 2\pi/\lambda$ is the wave number, λ is the vacuum wavelength, p_0 and p are a reference and the present pressure, respectively. a is the effective radius of the fiber. u_{mn} is the n th zero of a m th order Bessel function of the first kind. Since the fiber used in [5] has a hexagonal core, (1) is only an approximation. (1) originates from two principles: a λ dependent refractive index and an effective refractive index due to the present mode in a circular fiber. Firstly, we discuss the overall structure of the equation coming from the mode formed within the fiber. The field in the fiber is generated by a laser pulse. Once the laser is launched, Maxwell's equation and hence the Helmholtz equation have to be valid. It is known that the Helmholtz equation within a fiber with circular cross section is solved by Bessel functions [4]. Numerically, a Finite Difference Mode Solver can be used to obtain the eigenvectors \mathbf{E} representing the field and the eigenvalues k^{mn} representing the wave number for more complex shapes. The analytical solution for cylindrical symmetries is

$$k^{mn} = \sqrt{(nk_0)^2 - \left(\frac{u_{mn}}{a}\right)^2} \quad (2)$$

where n is the refractive index of the medium. From the wave number we obtain the effective refractive index

$$n^{mn} = \sqrt{n^2 - \left(\frac{u_{mn}}{ak_0}\right)^2}. \quad (3)$$

Secondly, we can now introduce a wavelength and a pressure dependency to the equation. To describe the λ dependency, several empirical approaches are possible. In the case of noble gases, the following Sellmeier equation turned out to be convenient [1]

$$n^2(\lambda, p_0) = 1 + \frac{T_0}{T} \left(\frac{B_1}{1 - (\lambda_1/\lambda)^2} + \frac{B_2}{1 - (\lambda_2/\lambda)^2} \right) \quad (4)$$

where $B_{1/2}$ and $\lambda_{1/2}$ are fitting parameters being gas specific. Furthermore, from the Lorentz-Lorenz theory we know that there is a linear relation between the squared refractive index

and the pressure p [1]. Knowing $n^2(p_0) \sim p_0$ it is straightforward to see that

$$n_{\text{Ar}}^2(\lambda, p) = \frac{p}{p_0} n^2(\lambda, p_0) \quad (5)$$

and therefore by measuring the Sellmeier parameters for a pressure p_0 we can plug Equation 4, 5 into 3 to obtain (1). By introducing a first order Taylor approximation of $\sqrt{1+x} \approx 1 + \frac{x}{2}$, we can further simplify to obtain the equation below.

$$n^{mn}(\lambda, p) \approx 1 + n^2(\lambda, p_0) \frac{p}{2p_0} - \frac{u_{mn}^2}{2k_0^2 a^2} \quad (6)$$

2. Phase Matching

In third harmonics generation, two fundamental conditions need to hold: energy and momentum conservation. In the wave picture, momentum conservation is a phase matching condition and can be in the fiber mode expressed as

$$\mathbf{k}^{mn} = 3 \cdot \mathbf{k}^{11} \quad (7)$$

and hence

$$n^{11}(\lambda, p) - n^{mn}(\lambda/3, p) = 0 \quad (8)$$

where mn is the generated third harmonic mode and 11 the pump mode. The left hand side of (8) can be visualized to find all possible solutions. We believe[†] that the hybrid mode HE_{mn} corresponds to Bessel coefficients $u_{(m-1)n}$. Accordingly, HE_{11} has the Bessel coefficients u_{01} . From Figure 1

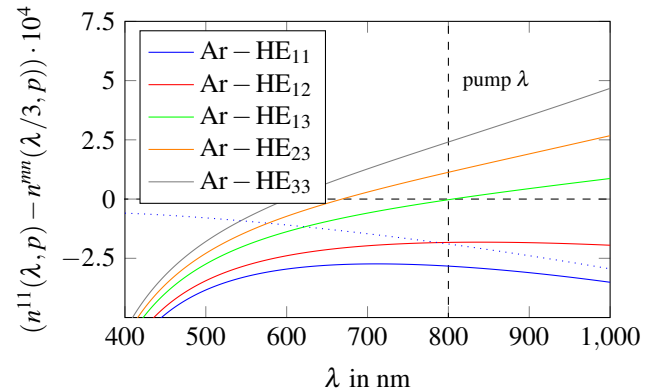


Figure 1. Refractive index difference of Ar for different HE modes and HE_{11} at $T = 293 \text{ K}$, $p = 5000 \text{ mbar}$.

it follows that intra-modal phase matching ($mn = 11$) is not possible since the HE_{11} curve does not reach values where the refractive index difference is approximately 0. Even, at a low pressure of $p = 100 \text{ mbar}$ the dotted blue line does not reach 0. Also mathematically it is clear that (8) cannot be solved for intra-modal phase matching because the only variable is

*For more details about the numerical calculations see this GitHub repository <https://git.io/Jt95W>

[†]Despite Travers et al. state differently [7], we could only reproduce the results of Nold et al. by decrementing m . This decrementation is mentioned by Marcatili et al. [3].

λ and since $n(\lambda)$ is a monotonic decreasing function, there is no solution for λ and $\lambda/3$. However, HE_{13} has a solution to the phase matching condition identifiable at $\lambda = 800 \text{ nm}$. Mathematically, $\lambda/3$ leads to a decrease in (8) which is then compensated by an increase of $u_{03} > u_{01}$.

Instead of using Ar-filled HC-PCF, third harmonics can be generated with Kr as well. Using the Sellmeier coefficients for Kr, we apply the phase matching condition to solve for the required pressure. In Figure 2 we can see that for $p^{13} = 2.4 \text{ bar}$,

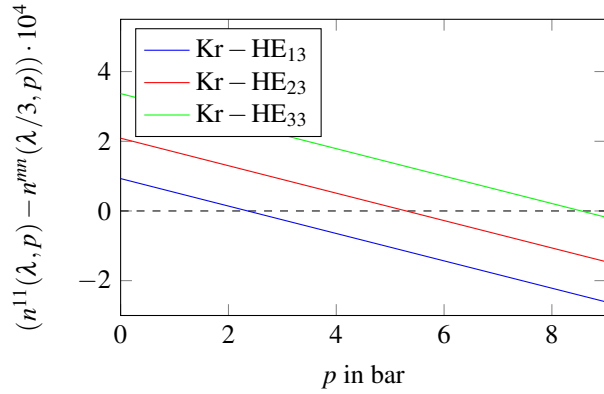


Figure 2. Refractive index difference of Kr for different HE modes and HE_{11} at $T = 293 \text{ K}$, $\lambda = 800 \text{ nm}$.

$p^{23} = 5.3 \text{ bar}$ and $p^{33} = 8.5 \text{ bar}$ the phase matching is fulfilled.

3. Xe-filled HC-PCF

Figure 3 shows the refractive index difference for a Xe-filled HC-PCF[‡]. It follows that third harmonic generation is pos-

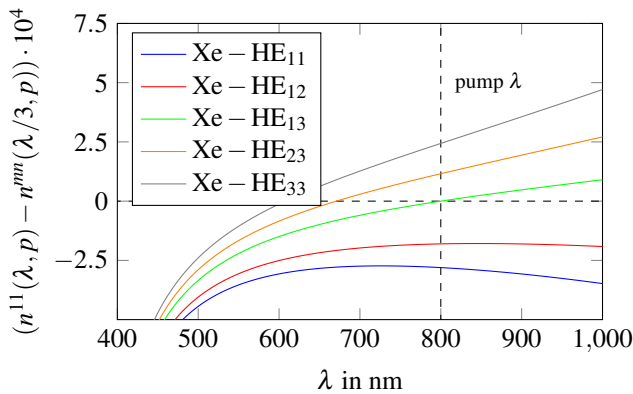


Figure 3. Refractive index difference of Xe for different HE modes and HE_{11} at $T = 293 \text{ K}$, $p = 960 \text{ mbar}$.

sible for Xe at lower pressures but even higher harmonics have been observed in Xe [2]. Among the investigated noble gases, Xe has the lowest absolute pressure and Ar the highest required for third harmonic generation. The reason for the lower pressure is that Xe has the largest dispersion [1] leading

to a smaller p needed to compensate for the larger u_{mn} in (8). Consequently Ar shows the lowest dispersion. It is worth to mention that the opportunity to use different gases enhances the use in practical applications of higher harmonics generation with HC-PCFs. Xe and Ar allow to vary the pressure by almost one order of magnitude but still generating third harmonics. Also, the linear pressure dependency in the phase matching condition allows to fine-tune efficiently for certain higher order modes. Furthermore, combining (6) together with the ideal gas law, gas-filled HC-PCFs are robust against temperature induced pressure variations. For moderate gas chamber dimensions temperature changes due to absorption of radiation are negligible [6]. In conclusion, noble gas-filled HC-PCFs allow for setups to be small, nonhazardous and insensitive to environmental changes and are therefore suitable candidates for generation of light in UV or EUV regimes. It can be conjectured, that other noble gases like Helium and Neon are also promising candidates since their Sellmeier coefficients are in the same order of magnitudes and the physical properties of noble gases are similar.

References

- [1] A. Börzsönyi, Z. Heiner, M. P. Kalashnikov, A. P. Kovács, and K. Osvay. “Dispersion measurement of inert gases and gas mixtures at 800 nm”. In: *Appl. Opt.* 47.27 (Sept. 2008), pp. 4856–4863.
- [2] O. Heckl, C. Baer, C. Krankel, S. Marchese, F. Schapper, M. Holler, T. Sudmeyer, J. Robinson, J. Tisch, F. Couny, P. Light, F. Benabid, and U. Keller. “High harmonic generation in a gas-filled hollow-core photonic crystal fiber”. English. In: *Applied Physics B-Lasers and Optics* 97.2 (Oct. 2009), pp. 369–373.
- [3] E. A. J. Marcatili and R. A. Schmeltzer. “Hollow metallic and dielectric waveguides for long distance optical transmission and lasers”. In: *The Bell System Technical Journal* 43.4 (1964), pp. 1783–1809.
- [4] L. Nickelson. “Cylindrical Hollow Metallic Waveguides and Cavity Resonators”. In: *Electromagnetic Theory and Plasmonics for Engineers*. Singapore: Springer Singapore, 2019, pp. 545–609.
- [5] J. Nold, P. Hölzer, N. Y. Joly, G. K. L. Wong, A. Nazarkin, A. Podlipensky, M. Scharrer, and P. S. Russell. “Pressure-controlled phase matching to third harmonic in Ar-filled hollow-core photonic crystal fiber”. In: *Opt. Lett.* 35.17 (Sept. 2010), pp. 2922–2924.
- [6] E. E. Serebryannikov, D. von der Linde, and A. M. Zheltikov. “Phase-matching solutions for high-order harmonic generation in hollow-core photonic-crystal fibers”. In: *Phys. Rev. E* 70 (6 Dec. 2004), p. 066619.
- [7] J. C. Travers, W. Chang, J. Nold, N. Y. Joly, and P. S. J. Russell. “Ultrafast nonlinear optics in gas-filled hollow-core photonic crystal fibers [Invited]”. In: *J. Opt. Soc. Am. B* 28.12 (Dec. 2011), A11–A26.

[‡]Note, there is a typo in [1]. C_1 should be $12.75 \cdot 10^{-3} \mu\text{m}^2$ instead of $12.75 \cdot 10^{-6} \mu\text{m}^2$. See <https://refractiveindex.info/?shelf=main&book=Xe&page=Borzsönyi>