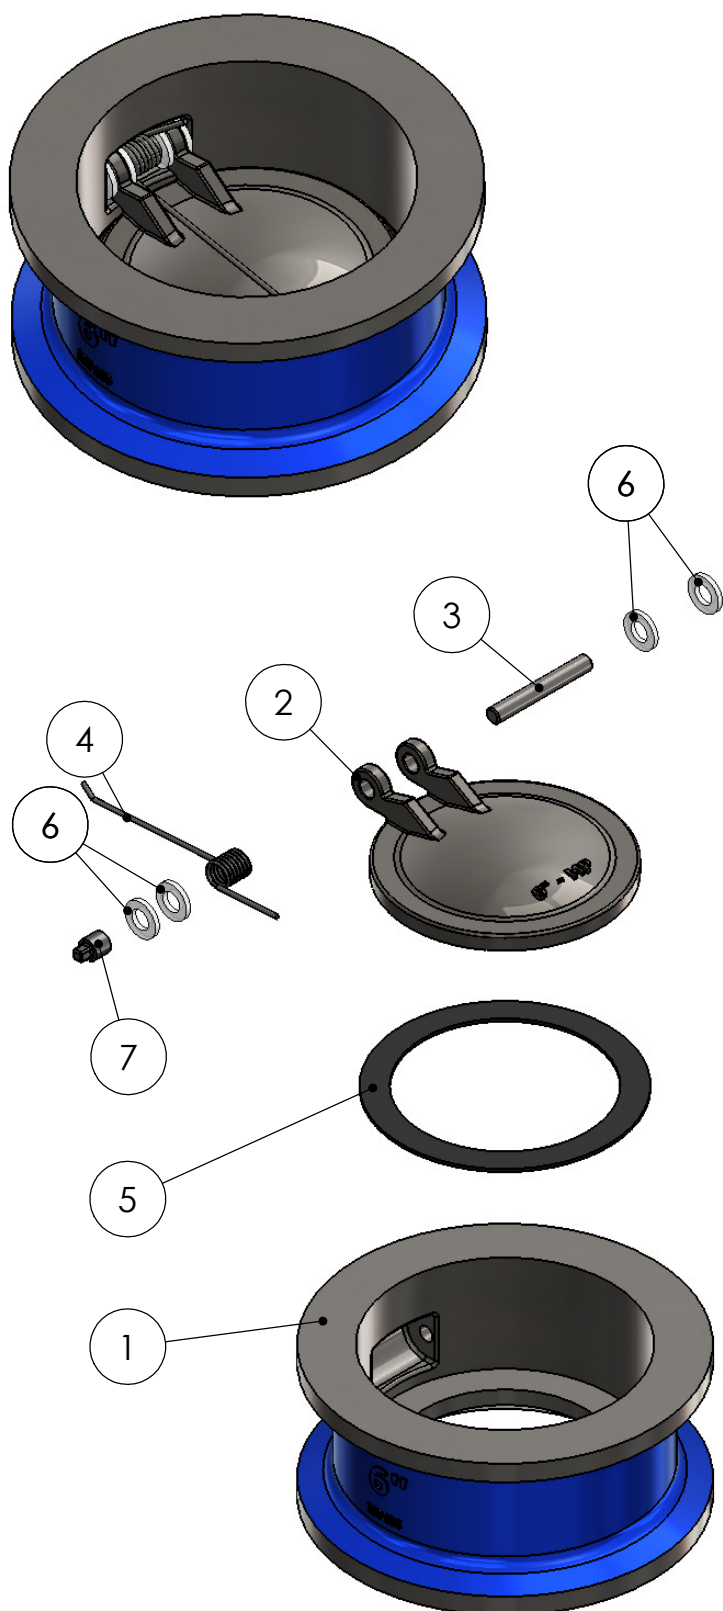


FICHA TÉCNICA - LISTA DE MATERIAIS

**1 - CORPO**

FºFº NOD. ASTM A536 GR. 65-45-12/04

BRONZE INDUSTRIAL ASTM B-62-09

BRONZE ALUMÍNIO ASTM B148 C95200

AÇO CARBONO ASTM A216 GR. WCB REV. 07

AÇO INOX ASTM A351 GR. CF8 REV. 06

AÇO INOX ASTM A351 GR. CF8M REV. 06

2 - FLAP PORTINHOLA

FºFº NOD. ASTM A536 GR. 65-45-12/04

BRONZE INDUSTRIAL ASTM B-62-09

BRONZE ALUMÍNIO ASTM B148 C95200

AÇO CARBONO ASTM A216 GR. WCB REV. 07

AÇO INOX ASTM A351 GR. CF8 REV. 06

AÇO INOX ASTM A351 GR. CF8M REV. 06

3 - EIXO

AÇO INOX AISI 410 - ASTM A276/06

AÇO INOX AISI 304 - ASTM A276/06

AÇO INOX AISI 316 - ASTM A276/06

4 - MOLA

AÇO INOX AISI 302

AÇO INOX AISI 304

AÇO INOX AISI 316

INCONEL X-750

5 - VEDAÇÃO

EPDM

BUNA-N

VITON

NEOPRENE

SILICONE

HYPALON

SBR

PTFE

METAL / METAL

6 - BUCHA




NYLON

7 - PLUG

AÇO GALVANIZADO



FICHA TÉCNICA - DIMENSIONAL

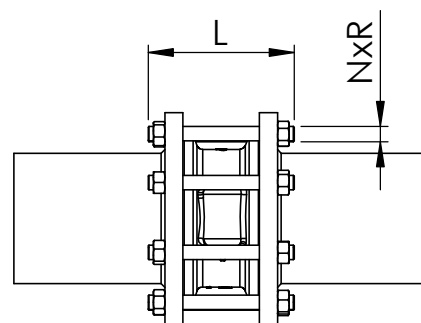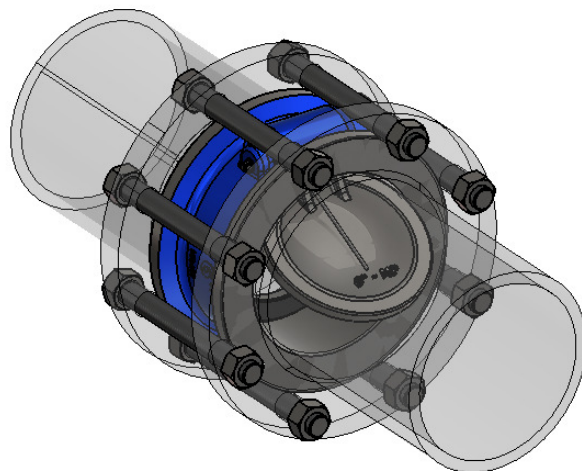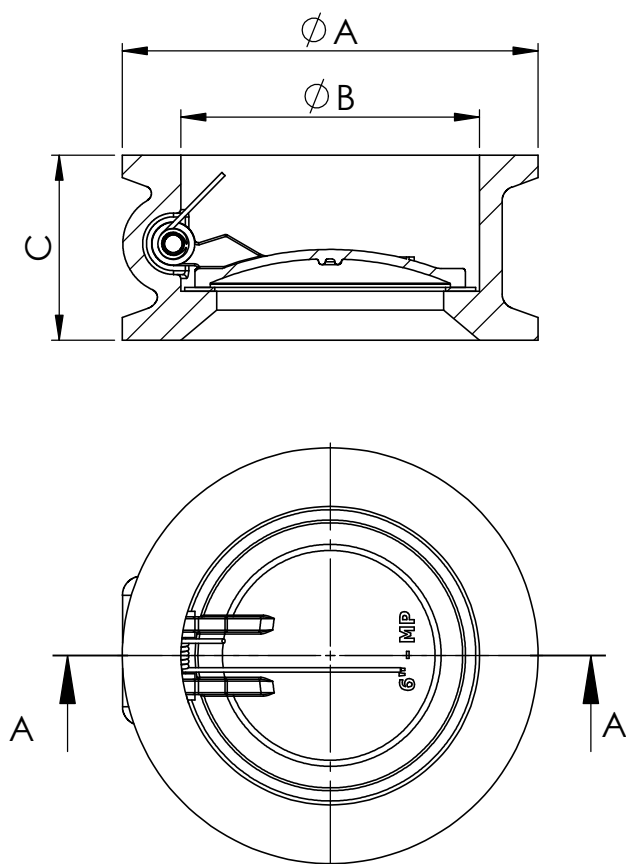

DN	A	B	C	N	R	L		VAPOR	Água, óleo ou gás, sem golpes, a 66°C
						PARAFUSO	PRISIONEIRO		
2"	106	58	60	4	W 5/8"	130	136	10,3 bar (150lbf/pol ²)	19,6 bar (285lbf/pol ²)
2½"	121	65	67	4	W 5/8"	143	150		
3"	135	79	73	4	W 5/8"	149	162		
4"	170	104	73	8	W 5/8"	149	162		
5"	192,5	130	86	8	W 3/4"	170	181		
6"	220	158	98	8	W 3/4"	170	181		
8"	275	210	127	8	W 3/4"	216	230		
10"	332	260	146	12	W 7/8"	241	260		
12"	400	315	181	12	W 7/8"	283	296		
14"	437	347	184	12	W 1"	292	311		
16"	495	415	191	16	W 1"	305	324		
18"	537	426	203	16	W 1.⅛"	324	349		
20"	595	484	219	20	W 1.⅛"	353	372		
24"	694	560	222	20	W 1.¼"	368	394		

