

The purpose of the telemetry receiver board is to take in data via RF module from the telemetry transmitter. The telemetry receiver board will then transmit this data over USB to a computer to read the data.

Sheet: /

File: telemetry\_receiver.sch

**Title:**

Size: A4


Date:

KiCad E.D.A. kicad (5.1.2)-1

**Rev:**

Id: 1/2

RTS/CTS aren't currently being used for RS-232 flow control. But in case there is a need to scramble something together, solder jumpers are being put here.

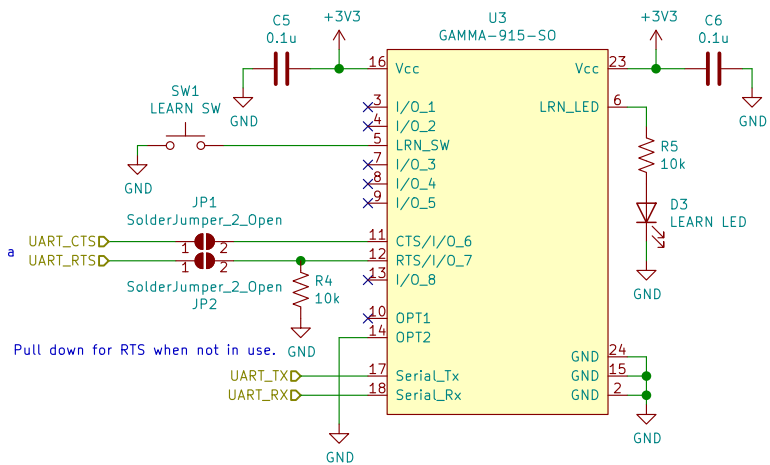

Sheet: /radio/  
File: radio.sch

**Title:**

Size: A4  
KiCad E.D.A. kicad (5.1.2)-1

Date:

**Rev:**

Id: 2/2