


In some situations (namely, integration testing), we want the bus to be powered without having the radio board connected. By moving a jumper on these pins, you can power the bus from the USB port of your computer.

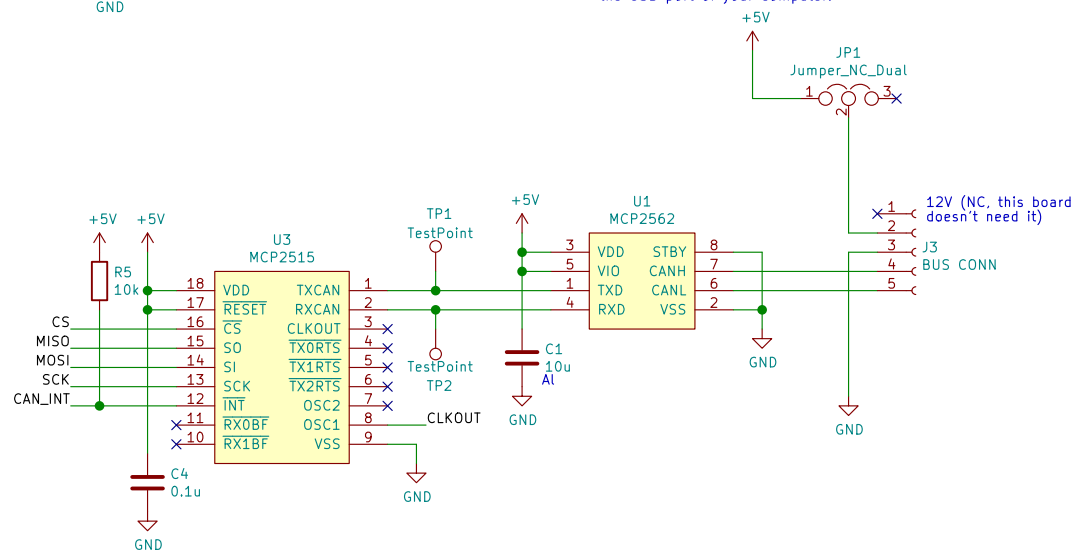

Rev:
Id: 1/1