



ROTEX® GS

Backlash-free jaw couplings


Standard types

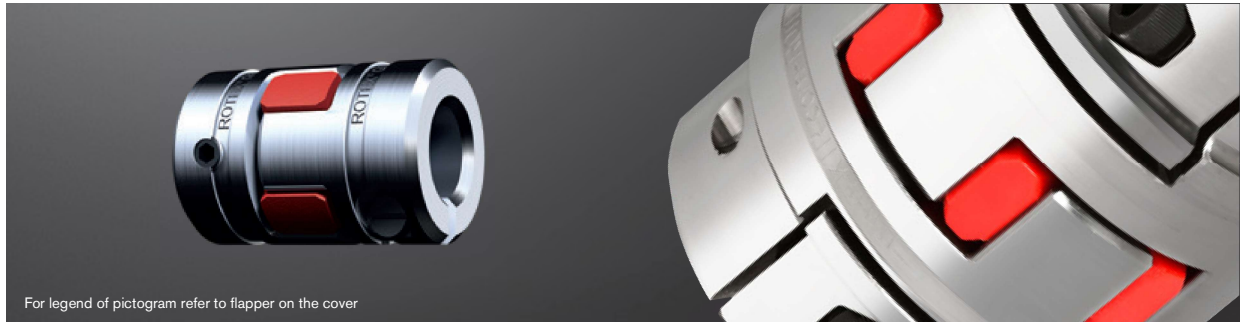


For legend of pictogram refer to flapper on the cover



ROTEX® GS 5 - 38

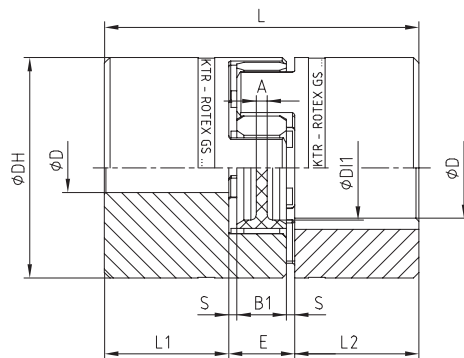


ROTEX® GS 42 - 90

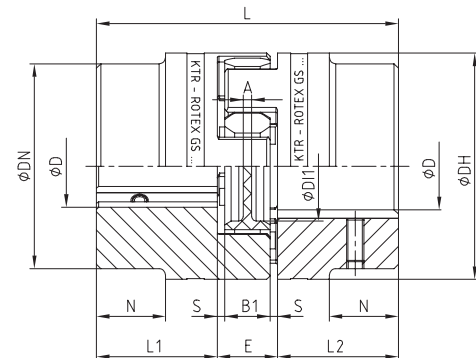


Types of hubs:

Type 1.0




with feather keyway
and setscrew

Type 1.1



without feather keyway,
with setscrew

Type 1.2



without feather keyway
and without setscrew

ROTEX® GS standard types - For size 5 to 38 hub material aluminium/for size 42 to 90 hub material steel

Size	Spider GS ¹⁾ torque T _{KN} [Nm]			D _{max.} for hub type			Dimensions [mm]											Setscrew DIN EN ISO 4029		
	98 ShA	57 ShD	64 ShD	1.0	1.1	1.2	DN	DH	DI1	L	L1, L2	M, N	E	B1	S	A	G	T	TA [Nm]	
5	0.9	–	–	–	6	6	–	10	–	15	5	–	5	4	0.5	4.0	M 2	2.5	0.35	
7	2.0	–	2.4	7	7	7	–	14	–	22	7	–	8	6	1.0	6.0	M 3	3.5	0.6	
9	5.0	–	6	10	11	11	–	20	7.2	30	10	–	10	8	1.0	1.5	M 4	5.0	1.5	
12	9.0	–	12	12	12	12	–	25	8.5	34	11	–	12	10	1.0	3.5	M 4	5.0	1.5	
14	12.5	–	16	16	16	16	–	30	10.5	35	11	–	13	10	1.5	2.0	M 4	5.0	1.5	
19	21	23	26	24	–	–	–	40	18	66	25	–	16	12	2.0	3.0	M 5	10	2.0	
24	60	68	76	32	–	–	–	55	27	78	30	–	18	14	2.0	3.0	M 5	10	2.0	
28	160	180	200	38	–	–	–	65	30	90	35	–	20	15	2.5	4.0	M 8	15	10	
38	325	365	405	45	–	–	–	80	38	114	45	–	24	18	3.0	4.0	M 8	15	10	
42	450	495	560	55	–	–	85	95	46	126	50	28	26	20	3.0	4.0	M 8	20	10	
48	525	590	655	62	–	–	95	105	51	140	56	32	28	21	3.5	4.0	M 8	20	10	
55	685	770	825	74	–	–	110	120	60	160	65	37	30	22	4.0	4.5	M 10	20	17	
65	940	1055	1175	80	–	–	115	135	68	185	75	47	35	26	4.5	4.5	M 10	20	17	
75	1920	–	2400	95	–	–	135	160	80	210	85	53	40	30	5.0	5.0	M 10	25	17	
90	3600	–	4500	110	–	–	160	200	104	245	100	62	45	34	5.5	6.5	M 12	30	40	

¹⁾ For selections see page 22 et seqq./other spiders see page 127.

Ordering example:

ROTEX® GS 24	98 ShA-GS	Ø 20	2.5 - Ø24	1.0 - Ø20
Coupling size	Spider hardness	Optional: Bore in spider	Hub type Finish bore	Hub type Finish bore