


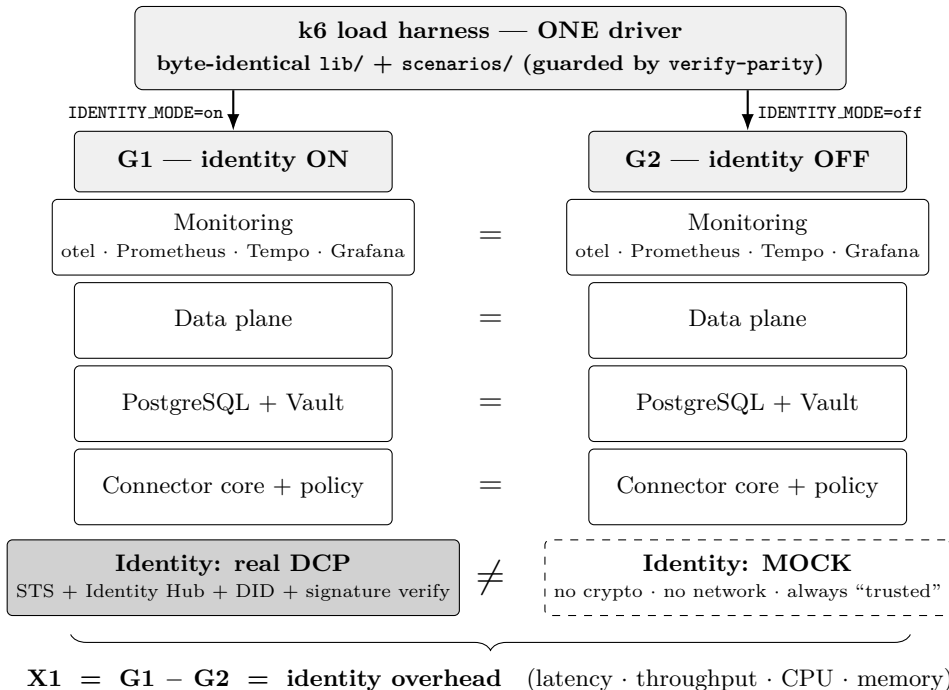

How each connector achieves “identity OFF” — same idea, different wiring

benchmarking-EDC	swap the control-plane runtime: DCP → iam-mock (transfer path is identity-agnostic)
factory-x	add an fx-mock-identity extension as the <i>sole</i> identity provider (DCP woven into transfer path)
dsp-native-basyx	flip <code>validationService mvd</code> → <code>mock</code> + bespoke raw-DSP driver + callback sink (non-EDC)