ELEC6027 - VLSI Design Project
Programmers Guide

Team R4

Henry Lovett (hl13g10)

Ashey J. Robinson (ajr2g10)

Martin Wearn (mw20g10)

Anusha R. Reddy (arr1g13)

Course Tutor: Mr B. Iain McNally

1st May, 2014

Todo list

Contents

1 Introduction

This is the Programmers Guide for the processor designed by Team R4 in the VLSI Design Project, ELEC6027.

The processor is called SAMURAI - **S**ixteen bit **A**RM and **M**IPS **U**nified **R**ISC **A**rchitecture with **I**nterrupts. It is a sixteen bit general purpose Von Neumann processor. SAMURAI implements a custom Instruction Set.

This guide documents the architecture and instruction set. In addition, four example programs are given along with instructions of the use of the Assembler. Finally, the simulation environment is explained, giving examples of how to run a program.

1.1 Architecture

Figure 1 shows the datapath architecture of the SAMURAI processor. The controller has been omitted along with all control signals. The exception is the status register is shown for data flow as this utilises the System Bus. Instruction decoding is also not shown for clarity. All registers, buses and multiplexors are 16 bits in length unless otherwise stated.

1.2 Register Description

The SAMURAI processor has twelve registers in total, all are 16 bits wide. These is a program counter, instruction register, link register, ALU output register and 8 general purpose registers. Each register is described below, along with any conventions.

General Purpose Registers The register block consists of eight General Purpose Registers (GPRs). There is no dummy register. By convention, Register 7 is used as the stack pointer. It is used by stack and interrupt instructions such as push, pop, store and load flags and return from interrupt.

Link Register The Link Register is used to store the return address of the caller function. However, it is not a part of the General Purpose register file. The link register is used by the branch with link and return from subroutine instructions. In these, the program counter is stored to or set by the link register. The link register can also be pushed or popped to/from the stack.

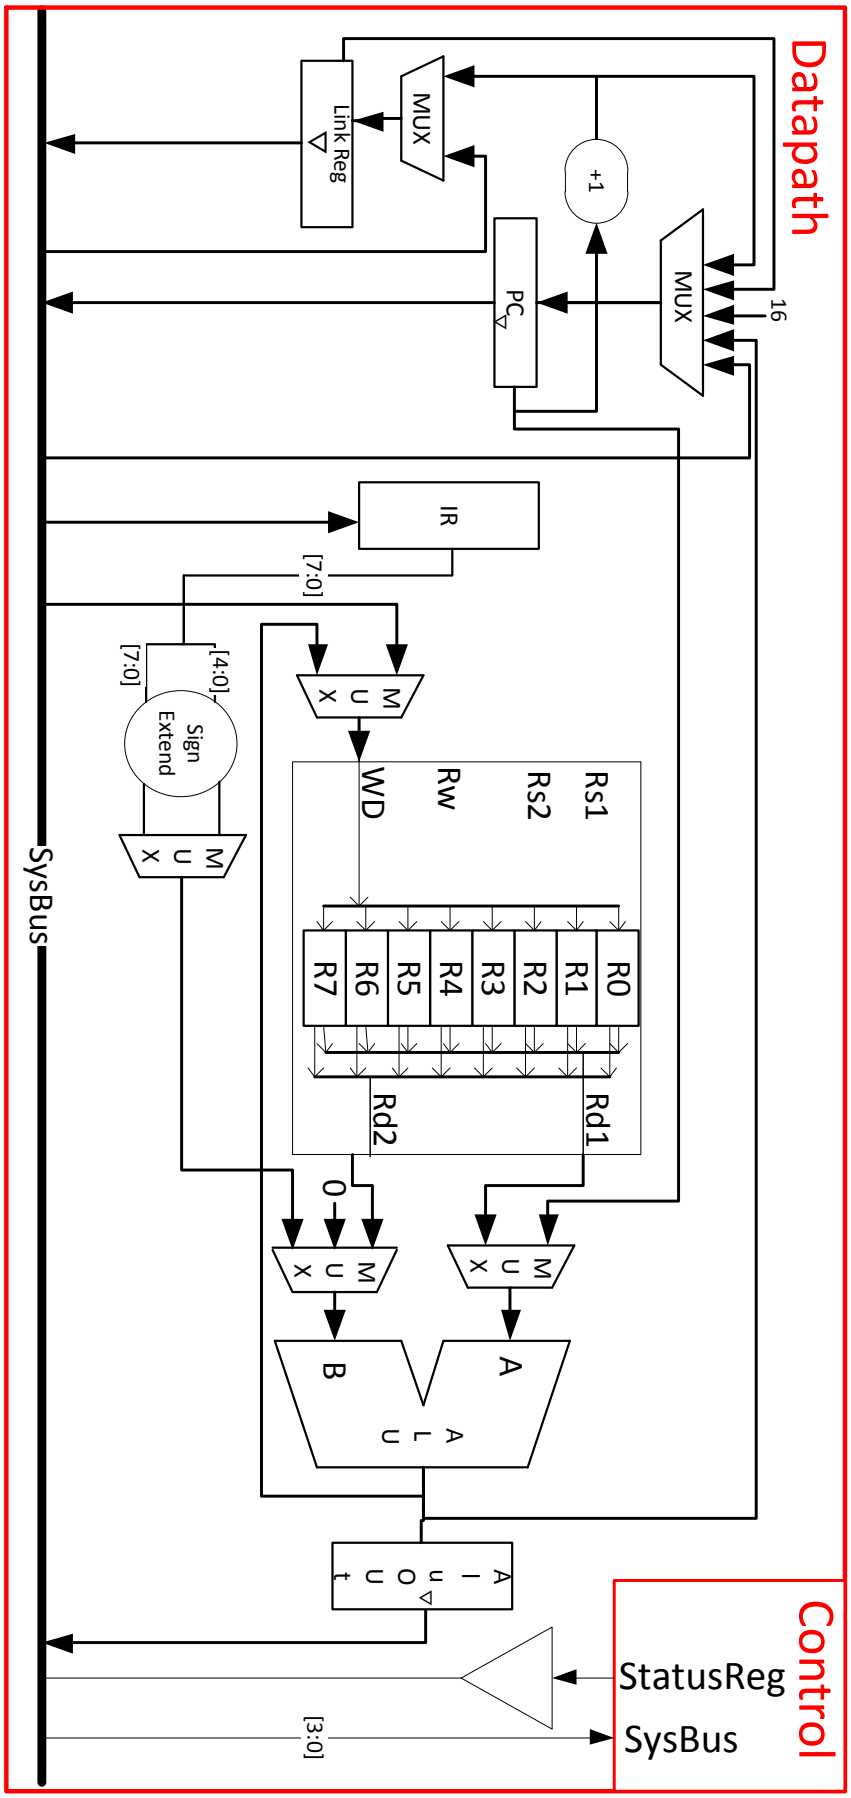

Figure 1: The Architecture diagram of the SAMURAI processor.

Program Counter The program counter is used to access the current instruction. It can be set by the result of an ALU operation, the link register, a value on the stack or a predefined constant used for interrupts. Branch instructions are the main modifier of the program counter. By default, all instructions increment the Program Counter by one to progress the operation of the program. This is not an addressable register and it's functionality is utilised by the control unit only.

Instruction Register The instruction register contains the currently executed instruction. This can only be set from the main memory by use of the Program Counter as the address to main memory. It is not addressable and it's function is utilised by the control unit.

AluOut The AluOut register is used to hold a value on the output of the ALU. It is used by memory access instructions and is not addressable.

2 Instruction Set

The complete instruction set architecture includes a number of instructions for performing calculations on data, memory access, transfer of control within a program and interrupt handling.

All instructions implemented by this architecture fall into one of 6 groups, categorised as follows:

- Data Manipulation - Arithmetic, Logical, Shifting
- Byte Immediate - Arithmetic, Byte Load
- Data Transfer - Memory Access
- Control Transfer - (Un)conditional Branching
- Stack Operations - Push, Pop
- Interrupts - Enabling, Status Storage, Returning

There is only one addressing mode associated with each instruction, generally following these groupings:

- Data Manipulation - Register-Register, Register-Immediate
- Byte Immediate - Register-Immediate
- Data Transfer - Base Plus Offset
- Control Transfer - PC Relative, Register-Indirect, Base Plus Offset
- Stack Operations - Register-Indirect Preincrement/Postdecrement
- Interrupts - Register-Indirect Preincrement/Postdecrement

2.1 General Instruction Formatting

	Instruction Type	Sub-Type	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
A1	**Data Manipulation**	**Register**	Opcode					Rd			Ra			Rb			X	X
A2		**Immediate**	Opcode					Rd			Ra			imm4/5				
B	**Byte Immediate**		Opcode					Rd			imm8							
C	**Data Transfer**		0	LS	0	0	0	Rd			Ra			imm5				
D1	**Control Transfer**	**Others**	1	1	1	1	0	Cond.			imm8							
D2		**Jump**									Ra			imm5				
E	**Stack Operations**		0	U	0	0	1	L	X	X	Ra			0	0	0	0	1
F	**Interrupts**		1	1	0	0	1	ICond.			1	1	1	X	X	X	X	X

Instruction Field Definitions

Opcode: Operation code as defined for each instruction
Rd: Destination Register
Ra: Source register 1
Rb: Source register 2
imm$N$: Immediate value of length N
Cond.: Branching condition code as defined for branch instructions
ICond.: Interrupt instruction code as defined for interrupt instructions
LS: 0=Load Data, 1=Store Data
U: 1=PUSH, 0=POP
L: 1=Use Link Register, 0=Use GPR

Pseudocode Notation

Symbol	Meaning
$\leftarrow$	Assignment
Result[x]	Bit x of result
Ra[$x : y$]	Bit range from x to y of register Ra
$<$	Numerically less than
$>$	Numerically greater than
$<<$	Logical shift left
$>>$	Logical shift right
$>>>$	Arithmetic shift right
Mem[*val*]	Data at memory location with address *val*
$\{x, y\}$	Concatenation of x and y to form a 16-bit value
!	Bitwise Negation

Use of the word UNPREDICTABLE indicates that the resultant flag value after operation execution will not be indicative of the ALU result. Instead its value will correspond to the result of an undefined arithmetic operation and as such should not be used.

2.2 ADD — Add Word

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	0	0	1	0	Rd			Ra			Rb			X	X

Syntax

ADD Rd, Ra, Rb eg. ADD R5, R3, R2

Operation

Rd $\leftarrow$ Ra + Rb

N $\leftarrow$ if (Result < 0) then 1, else 0

Z $\leftarrow$ if (Result $= 0$) then 1, else 0

V $\leftarrow$ if (Ra>0 and Rb>0 and Result<0) or

(Ra<0 and Rb<0 and Result>0) then 1, else 0

C $\leftarrow$ if (Result $> 2^{16} - 1$) or

(Result $< -2^{16}$) then 1, else 0

Description

The 16-bit word in GPR[Ra] is added to the 16-bit word in GPR[Rb] and the result is placed into GPR[Rd].

Addressing Mode: Register-Register.

2.3 ADDI — Add Immediate

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	0	1	1	0	Rd			Ra			imm5				

Syntax

ADDI Rd, Ra, #imm5 eg. ADDI R5, R3, #7

Operation

Rd $\leftarrow$ Ra + imm5

N $\leftarrow$ if (Result < 0) then 1, else 0

Z $\leftarrow$ if (Result $= 0$) then 1, else 0

V $\leftarrow$ if (Ra>0 and #imm5>0 and Result<0) or

(Ra<0 and #imm5<0 and Result>0) then 1, else 0

C $\leftarrow$ if (Result $> 2^{16} - 1$) or

(Result $< -2^{16}$) then 1, else 0

Description

The 16-bit word in GPR[Ra] is added to the sign-extended 5-bit value given in the instruction and the result is placed into GPR[Rd].

Addressing Mode: Register-Immediate.

2.4 ADDIB — Add Immediate Byte

Format



Syntax

ADDIB Rd, #imm8 eg. ADDIB R5, #93

Operation

Rd $\leftarrow$ Rd + imm8

N $\leftarrow$ if (Result < 0) then 1, else 0

Z $\leftarrow$ if (Result $= 0$) then 1, else 0

V $\leftarrow$ if (Rd>0 and #imm8>0 and Result<0) or

(Rd<0 and #imm8<0 and Result>0) then 1, else 0

C $\leftarrow$ if (Result $> 2^{16} - 1$) or

(Result $< -2^{16}$) then 1, else 0

Description

The 16-bit word in GPR[Rd] is added to the sign-extended 8-bit value given in the instruction and the result is placed into GPR[Rd].

Addressing Mode: Register-Immediate.

2.5 ADC — Add Word With Carry

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	0	1	0	0	Rd			Ra			Rb			X	X

Syntax

ADC Rd, Ra, Rb — eg. ADC R5, R3, R2

Operation

Rd $\leftarrow$ Ra + Rb + C

N $\leftarrow$ if (Result < 0) then 1, else 0

Z $\leftarrow$ if (Result $= 0$) then 1, else 0

V $\leftarrow$ if (Ra>0 and (Rb+CFlag)>0 and Result<0) or
(Ra<0 and (Rb+CFlag)<0 and Result>0) then 1, else 0

C $\leftarrow$ if (Result $> 2^{16} - 1$) or
(Result $< -2^{16}$) then 1, else 0

Description

The 16-bit word in GPR[Ra] is added to the 16-bit word in GPR[Rb] with the added carry in set according to the Carry flag from previous operation. The result is then placed into GPR[Rd].

Addressing Mode: Register-Register.

2.6 ADCI Add Immediate With Carry

Format



Syntax

ADCI Rd, Ra, #imm5 eg. ADCI R5, R4, #7

Operation

Rd $\leftarrow$ Ra + imm5 + C

N $\leftarrow$ if (Result < 0) then 1, else 0

Z $\leftarrow$ if (Result $= 0$) then 1, else 0

V $\leftarrow$ if (Ra>0 and (#imm5+CFlag)>0 and Result<0) or

(Ra<0 and (#imm5+CFlag)<0 and Result>0) then 1, else 0

C $\leftarrow$ if (Result $> 2^{16} - 1$) or

(Result $< -2^{16}$) then 1, else 0

Description

The 16-bit word in GPR[Ra] is added to the sign-extended 5-bit value given in the instruction with carry in set according to the Carry flag from previous operation. The result is then placed into GPR[Rd].

Addressing Mode: Register-Immediate.

2.7 NEG Negate Word

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	0	1	0	Rd			Ra			X	X	X	X	X

Syntax

NEG Rd, Ra eg. NEG R5, R3

Operation

Rd ← 0 - Ra

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← 0

C ← 0

Description

The 16-bit word in GPR[Ra] is subtracted from zero and the result is placed into GPR[Rd].

Addressing Mode: Register-Register.

2.8 SUB Subtract Word

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	1	0	1	0	Rd			Ra			Rb			X	X

Syntax

SUB Rd, Ra, Rb eg. SUB R5, R3, R2

Operation

Rd ← Ra - Rb

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← if (Ra>0 and Rb>0 and Result<0) or

(Ra<0 and Rb<0 and Result>0) then 1, else 0

C ← if (Result $> 2^{16} - 1$) or

(Result $< -2^{16}$) then 1, else 0

Description

The 16-bit word in GPR[Rb] is subtracted from the 16-bit word in GPR[Ra] and the result is placed into GPR[Rd].

Addressing Mode: Register-Register.

2.9 SUBI — Subtract Immediate

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	1	1	1	0	Rd			Ra			imm5				

Syntax

SUBI Rd, Ra, #imm5 eg. SUBI R5, R3, #7

Operation

Rd ← Ra - imm5

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← if (Ra>0 and #imm5>0 and Result<0) or

(Ra<0 and #imm5<0 and Result>0) then 1, else 0

C ← if (Result $> 2^{16} - 1$) or

(Result $< -2^{16}$) then 1, else 0

Description

The sign extended 5-bit value given in the instruction is subtracted from the 16-bit word in GPR[Ra] and the result is placed into GPR[Rd].

Addressing Mode: Register-Immediate.

2.10 SUBIB Subtract Immediate Byte

Format



Syntax

SUBIB Rd, #imm8 eg. SUBIB R5, #93

Operation

Rd ← Rd - imm8

N ← if (Result < 0) then 1, else 0

Z ← if (Result $= 0$) then 1, else 0

V ← if (Rd>0 and #imm8>0 and Result<0) or

(Rd<0 and #imm8<0 and Result>0) then 1, else 0

C ← if (Result $> 2^{16} - 1$) or

(Result $< -2^{16}$) then 1, else 0

Description

The 8-bit immediate value given in the instruction is subtracted from the 16-bit word in GPR[Rd] and the result is placed into GPR[Rd].

Addressing Mode: Register-Immediate.

2.11 SUC Subtract Word With Carry

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	1	1	0	0	Rd			Ra			Rb			X	X

Syntax

SUC Rd, Ra, Rb eg. SUC R5, R3, R2

Operation

Rd ← Ra - Rb - C

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← if (Ra>0 and (Rb-CFlag)>0 and Result<0) or

(Ra<0 and (Rb-CFlag)<0 and Result>0) then 1, else 0

C ← if (Result $> 2^{16} - 1$) or

(Result $< -2^{16}$) then 1, else 0

Description

The 16-bit word in GPR[Rb] is subtracted from the 16-bit word in GPR[Rb] with the subtracted carry in set according to the Carry flag from previous operation. The result is then placed into GPR[Rd].

Addressing Mode: Register-Register.

2.12 SUCI Subtract Immediate With Carry

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	1	1	0	1	Rd			Ra			imm5				

Syntax

SUCI Rd, Ra, #imm5 eg. SUCI R5, R4, #7

Operation

Rd $\leftarrow$ Ra - imm5 - C

N $\leftarrow$ if (Result < 0) then 1, else 0

Z $\leftarrow$ if (Result $= 0$) then 1, else 0

V $\leftarrow$ if (Ra>0 and (#imm5-CFlag)>0 and Result<0) or

(Ra<0 and (#imm5-CFlag)<0 and Result>0) then 1, else 0

C $\leftarrow$ if (Result $> 2^{16} - 1$) or

(Result $< -2^{16}$) then 1, else 0

Description

The 5-bit immediate value in instruction is subtracted from the 16-bit word in GPR[Ra] with the subtracted carry in set according to the Carry flag from previous operation. The result is then placed into GPR[Rd].

Addressing Mode: Register-Immediate.

2.13 CMP Compare Word

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	0	1	1	1	X	X	X	Ra			Rb			X	X

Syntax

CMP Ra, Rb eg. CMP R3, R2

Operation

Ra - Rb

N $\leftarrow$ if (Result < 0) then 1, else 0

Z $\leftarrow$ if (Result $= 0$) then 1, else 0

V $\leftarrow$ if (Ra>0 and Rb>0 and Result<0) or

(Ra<0 and Rb<0 and Result>0) then 1, else 0

C $\leftarrow$ if (Result $> 2^{16} - 1$) or

(Result $< -2^{16}$) then 1, else 0

Description

The 16-bit word in GPR[Rb] is subtracted from the 16-bit word in GPR[Ra] and the status flags are updated without saving the result.

Addressing Mode: Register-Register.

2.14 CMPI — Compare Immediate

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	1	1	1	1	X	X	X	Ra			imm5				

Syntax

CMPI Ra, #imm5 eg. CMPI R3, #7

Operation

Ra - imm5

N $\leftarrow$ if (Result $<$ 0) then 1, else 0

Z $\leftarrow$ if (Result $=$ 0) then 1, else 0

V $\leftarrow$ if (Ra>0 and #imm5>0 and Result<0) or

(Ra<0 and #imm5<0 and Result>0) then 1, else 0

C $\leftarrow$ if (Result $> 2^{16} - 1$) or

(Result $< -2^{16}$) then 1, else 0

Description

The sign extended 5-bit value given in the instruction is subtracted from the 16-bit word in GPR[Ra] and the status flags are updated without saving the result.

Addressing Mode: Register-Immediate.

2.15 AND — Logical AND

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	0	0	0	Rd			Ra			Rb			X	X

Syntax

AND Rd, Ra, Rb — eg. AND R5, R3, R2

Operation

Rd ← Ra `AND` Rb

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← UNPREDICTABLE

C ← UNPREDICTABLE

Description

The logical `AND` of the 16-bit words in GPR[Ra] and GPR[Rb] is performed and the result is placed into GPR[Rd].

Addressing Mode: Register-Register.

2.16 OR — Logical OR

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	0	0	1	Rd			Ra			Rb			X	X

Syntax

OR Rd, Ra, Rb — eg. OR R5, R3, R2

Operation

Rd ← Ra `OR` Rb

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← UNPREDICTABLE

C ← UNPREDICTABLE

Description

The logical `OR` of the 16-bit words in GPR[Ra] and GPR[Rb] is performed and the result is placed into GPR[Rd].

Addressing Mode: Register-Register.

2.17 XOR — Logical XOR

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	0	1	1	Rd			Ra			Rb			X	X

Syntax

XOR Rd, Ra, Rb — eg. XOR R5, R3, R2

Operation

Rd ← Ra `XOR` Rb

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← UNPREDICTABLE

C ← UNPREDICTABLE

Description

The logical `XOR` of the 16-bit words in GPR[Ra] and GPR[Rb] is performed and the result is placed into GPR[Rd].

Addressing Mode: Register-Register.

2.18 NOT — Logical NOT

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	0	1	0	Rd			Ra			X	X	X	X	X

Syntax

NOT Rd, Ra — eg. NOT R5, R3

Operation

Rd ← `NOT` Ra

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← UNPREDICTABLE

C ← UNPREDICTABLE

Description

The logical `NOT` of the 16-bit word in GPR[Ra] is performed and the result is placed into GPR[Rd].

Addressing Mode: Register-Register.

2.19 NAND — Logical NAND

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	0	Rd			Ra			Rb			X	X

Syntax

NAND Rd, Ra, Rb — eg. NAND R5, R3, R2

Operation

Rd ← Ra `NAND` Rb

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← UNPREDICTABLE

C ← UNPREDICTABLE

Description

The logical `NAND` of the 16-bit words in GPR[Ra] and GPR[Rb] is performed and the result is placed into GPR[Rd].

Addressing Mode: Register-Register.

2.20 NOR — Logical NOR

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	0	1	1	1	Rd			Ra			Rb			X	X

Syntax

NOR Rd, Ra, Rb — eg. NOR R5, R3, R2

Operation

Rd ← Ra `NOR` Rb

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← UNPREDICTABLE

C ← UNPREDICTABLE

Description

The logical `NOR` of the 16-bit words in GPR[Ra] and GPR[Rb] is performed and the result is placed into GPR[Rd].

Addressing Mode: Register-Register.

2.21 LSL Logical Shift Left

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	1	Rd			Ra			0	imm4			

Syntax

LSL Rd, Ra, #imm4 eg. LSL R5, R3, #7

Operation

Rd ← Ra << imm4

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← UNPREDICTABLE

C ← UNPREDICTABLE

Description

The 16-bit word in GPR[Ra] is shifted left by the 4-bit amount specified in the instruction, shifting in zeros, and the result is placed into GPR[Rd].

Addressing Mode: Register-Immediate.

2.22 LSR — Logical Shift Right

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	1	Rd			Ra			0	imm4			

Syntax

LSR Rd, Ra, #imm4 eg. LSR R5, R3, #7

Operation

Rd ← Ra >> imm4

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← UNPREDICTABLE

C ← UNPREDICTABLE

Description

The 16-bit word in GPR[Ra] is shifted right by the 4-bit amount specified in the instruction, shifting in zeros, and the result is placed into GPR[Rd].

Addressing Mode: Register-Immediate.

2.23 ASR Arithmetic Shift Right

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	0	0	Rd			Ra			0	imm4			

Syntax

ASR Rd, Ra, #imm4 eg. ASR R5, R3, #7

Operation

Rd ← Ra >>> imm4

N ← if (Result < 0) then 1, else 0

Z ← if (Result = 0) then 1, else 0

V ← UNPREDICTABLE

C ← UNPREDICTABLE

Description

The 16-bit word in GPR[Ra] is shifted right by the 4-bit amount specified in the instruction, shifting in the sign bit of Ra. The result is then placed into GPR[Rd].

Addressing Mode: Register-Immediate.

2.24 LDW Load Word

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	0	0	0	0	Rd			Ra			imm5				

Syntax

LDW Rd, [Ra, #imm5] eg. LDW R5, [R3, #7]

Operation

Rd ← Mem[Ra + imm5]

N ← N

Z ← Z

V ← V

C ← C

Description

Data is loaded from memory at the resultant address from addition of GPR[Ra] and the 5-bit immediate value specified in the instruction. The result is then placed into GPR[Rd].

Addressing Mode: Base Plus Offset.

2.25 STW Store Word

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	1	0	0	0	Rd			Ra			imm5				

Syntax

STW Rd, [Ra, #imm5] eg. STW R5, [R3, #7]

Operation

Mem[Ra + imm5] ← Rd

N ← N

Z ← Z

V ← V

C ← C

Description

Data in GPR[Rd] is stored to memory at the resultant address from addition of GPR[Ra] and the 5-bit immediate value specified in the instruction.

Addressing Mode: Base Plus Offset.

2.26 LUI — Load Upper Immediate

Format



Syntax

LUI Rd #imm8 eg. LUI R5, #93

Operation

Rd ← {imm8, 0}

N ← N

Z ← Z

V ← V

C ← C

Description

The 8-bit immediate value provided in the instruction is loaded into the top half of GPR[Rd], setting the bottom half to zero. The result is then stored in GPR[Rd].

Addressing Mode: Register-Immediate.

2.27 LLI — Load Lower Immediate

Format



Syntax

LLI Rd #imm8 eg. LLI R5, #93

Operation

Rd ← {Rd[15:8], imm8}

N ← N

Z ← Z

V ← V

C ← C

Description

The 8-bit immediate value provided in the instruction is loaded into the bottom half of GPR[Rd], leaving the top half unchanged. The result is then stored in GPR[Rd].

Addressing Mode: Register-Immediate.

2.28 BR — Branch Always

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	0	0	0	imm8							

Syntax

BR LABEL — eg. BR .loop

Operation

PC ← PC + imm8

N ← N

Z ← Z

V ← V

C ← C

Description

Unconditionally branch to the resultant address from addition of PC and the 8-bit immediate value specified in the instruction. LABEL is a symbolic name for the destination and is capable of jumping forwards or backwards.

Addressing Mode: PC Relative.

2.29 BNE — Branch If Not Equal

Format



15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	1	1	0	imm8							

Syntax

BNE LABEL — eg. BNE .loop

Operation

if (z=0) PC ← PC + imm8

N ← N

Z ← Z

V ← V

C ← C

Description

Conditionally branch to the resultant address from addition of PC and the 8-bit immediate value specified in the instruction if zero status flag (Z) equals zero. LABEL is a symbolic name for the destination and is capable of jumping forwards or backwards.

Addressing Mode: PC Relative.

2.30 BE — Branch If Equal

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	1	1	1	imm8							

Syntax

BE LABEL — eg. BE .loop

Operation

if (z=1) PC ← PC + imm8

N ← N

Z ← Z

V ← V

C ← C

Description

Conditionally branch to the resultant address from addition of PC and the 8-bit immediate value specified in the instruction if zero status flag (Z) equals one. LABEL is a symbolic name for the destination and is capable of jumping forwards or backwards.

Addressing Mode: PC Relative.

2.31 BLT — Branch If Less Than

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	1	0	0	imm8							

Syntax

BLT LABEL — eg. BLT .loop

Operation

if (n&!v OR !n&v) PC ← PC + imm8

N ← N

Z ← Z

V ← V

C ← C

Description

Conditionally branch to the resultant address from addition of PC and the 8-bit immediate value specified in the instruction if negative status flag and overflow status flag are not equivalent. LABEL is a symbolic name for the destination and is capable of jumping forwards or backwards.

Addressing Mode: PC Relative.

2.32 BGE Branch If Greater Than Or Equal

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	1	0	1	imm8							

Syntax

BGE LABEL eg. BGE .loop

Operation

if (n&v OR !n&!v) PC ← PC + imm8

N ← N

Z ← Z

V ← V

C ← C

Description

Conditionally branch to the resultant address from addition of PC and the 8-bit immediate value specified in the instruction if negative status flag and overflow status flag are equivalent. LABEL is a symbolic name for the destination and is capable of jumping forwards or backwards.

Addressing Mode: PC Relative.

2.33 BWL Branch With Link

Format



Syntax

BWL LABEL eg. BWL .loop

Operation

LR ← PC + 1; PC ← PC + imm8

N ← N

Z ← Z

V ← V

C ← C

Description

Save the current program counter (PC) value plus one to the link register. Then unconditionally branch to the resultant address from addition of PC and the 8-bit immediate value specified in the instruction.LABEL is a symbolic name for the destination and is capable of jumping forwards or backwards.

Addressing Mode: PC Relative.

2.34 RET — Return

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	0	1	0	imm8							

Syntax

RET eg. RET

Operation

PC ← LR

N ← N

Z ← Z

V ← V

C ← C

Description

Unconditionally branch to the address stored in the link register (LR).

Addressing Mode: Register-Indirect.

2.35 JMP — Jump

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	1	1	0	0	0	1	imm8							

Syntax

JMP Ra, #imm5 eg. JMP R3, #7

Operation

PC ← Ra + imm5

N ← N

Z ← Z

V ← V

C ← C

Description

Unconditionally jump to the resultant address from the addition of GPR[Ra] and the 5-bit immediate value specified in the instruction.

Addressing Mode: Base Plus Offset.

2.36 PUSH — Push From Stack

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	1	0	0	1	L	X	X	Ra			0	0	0	0	1

Syntax

PUSH Ra — eg. PUSH R3
PUSH LR — eg. PUSH LR

Operation

Mem[R7] ← reg; R7 ← R7 - 1

N ← N

Z ← Z

V ← V

C ← C

Description

'reg' corresponds to either a GPR or the link register, the contents of which are stored to the stack using the address stored in the stack pointer (R7). This then Decrements the stack pointer by one.

Addressing Modes: Register-Indirect, Postdecrement.

2.37 POP — Pop From Stack

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	0	0	0	1	L	X	X	Ra			0	0	0	0	1

Syntax

POP Ra — eg. POP R3
POP LR — eg. POP LR

Operation

R7 ← R7 + 1; Mem[R7] ← reg;

N ← N

Z ← Z

V ← V

C ← C

Description

This instruction increments the stack pointer by one. Then 'reg' corresponds to either a GPR or the link register, the contents of which are retrieved from the stack using the address stored in the stack pointer (R7).

Addressing Modes: Register-Indirect, Preincrement.

2.38 RETI — Return From Interrupt

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	0	0	1	0	0	0	1	1	1	X	X	X	X	X

Syntax

RETI eg. RETI

Operation

PC ← Mem[R7]

N ← N

Z ← Z

V ← V

C ← C

Description

Restore program counter to its value before interrupt occurred, which is stored on the stack, pointed to by the stack pointer (R7).

Addressing Mode: Register-Indirect.

2.39 ENAI — Enable Interrupts

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	0	0	1	0	0	1	1	1	1	X	X	X	X	X

Syntax

ENAI — eg. ENAI

Operation

Set Interrupt Enable Flag

N ← N

Z ← Z

V ← V

C ← C

Description

Turn on interrupts by setting interrupt enable flag to true (1).

2.40 DISI — Disable Interrupts

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	0	0	1	0	1	0	1	1	1	X	X	X	X	X

Syntax

DISI eg. DISI

Operation

Reset Interrupt Enable Flag

N ← N

Z ← Z

V ← V

C ← C

Description

Turn off interrupts by setting interrupt enable flag to false (0).

2.41 STF — Store Status Flags

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	0	0	1	0	1	1	1	1	1	X	X	X	X	X

Syntax

STF eg. STF

Operation

Mem[R7] ← {12-bit 0, Z, C, V, N}; R7 ← R7 - 1;

N ← N

Z ← Z

V ← V

C ← C

Description

Store contents of status flags to stack using address held in stack pointer (R7). Then decrement the stack pointer (R7) by one.

Addressing Modes: Register-Indirect, Postdecrement.

2.42 LDF — Load Status Flags

Format

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1	1	0	0	1	1	0	0	1	1	1	X	X	X	X	X

Syntax

LDF eg. LDF

Operation

R7 ← R7 + 1

N ← Mem[R7][0]

Z ← Mem[R7][3]

V ← Mem[R7][1]

C ← Mem[R7][2]

Description

Increment the stack pointer (R7) by one. Then load content of status flags with lower 4 bits of value retrieved from stack using address held in stack pointer (R7).

Addressing Modes: Register-Indirect, Preincrement.

3 Programming Tips

Programing Tips section needs completing

This section gives hints and tips about programming for the SAMURAI processor.

3.1 Branching

The SAMURAI processor supports four conditional branches. There are **BE**, **BNE**, **BLT** and **BGE**. All conditional branches have an eight bit signed immediate field which is added to the program counter. Labels are supported by the assembler to aid programming (see section 4).

All arithmetic operations update the flags based on the result of the operation. Logic operations update the negative and zero flags. As well as these, the **CMP** and **CMPI** instructions update the flags, but the result is not stored.

Conditional branches should be conducted by first doing a logic or arithmetic operation, followed by the relevant branch instruction. Listing 1 shows assembly for a simple *if-then-else* clause. First, some definitions are made to make the code more readable. These are discussed further in section 4. A compare is done between the *a* value and an immediate 1. If these two numbers are not equal, the program flows takes the jump and loads a 0 into *b*. Else, the program falls through and a 1 is loaded to the *b* register. The program then takes an unconditional jump to the end of the clause. This is a simple implementation and can be extended to large case statements.

Listing 1: Example code for an *if-then-else* operation.

```
1  ;if 'a' == 1 then b = 1 else b = 0
2  .define a R0
3  .define b R1
4  CMPI a 1 ; store flags for operation (a - 1)
5  BNE .else ; branch is a != 1
6  LUI b 0 ; else fall through
7  LLI b 1 ; load b with 1
8  JMP .end
9  .else LUI b 0 ; LUI sets lower byte to 0
10 .end ...
```

Listing 2 is an example of how to implement a for loop. Again, definitions are made give the code more meaning. Then the i variable is initialised to 0 before the loop. Since only greater than or equal, and less than branches are supported, the condition is non-trivial. This is done by using a temporary register which is set to $i + 1$. A compare is done between the temporary register and an immediate 11. This is as $i \leq 10$ is the same as $(i + 1) < 11$. A **BGE** is done to escape the loop. If this isn't taken, the contents of the loop is executed. i is then incremented and the program jumps to the start of the loop.

Listing 2: Example code for a *for* loop.

```
;for ( i = 0; i <= 10; i ++)
; a = a + i;
.define i R0
.define a R1
.define temp R2
LUI i 0 ;initialise i to 0
.loop ADDI temp i 1 ;need to add one to i so the branch is a
    greater than
CMPI temp 11 ;check condition
BGE .end ;if not(temp >= 11) -> i < 10
ADD a a i ;do the operation of a += i
ADDIB i 1 ;increment i
JMP .loop ; return to the top of the loop
.end ...
```

would a while loop be good to put in?

3.2 Stack Pointer Usage

A full descending stack is used with the SAMURAI processor. This means from the initial value the stack pointer is incremented before data is written to memory. It is recommended that stack pointer is initialised to x where $x - 1$ is the top address in main memory. Relative loads from the stack pointer are possible and discussed at length in section 3.3.

Listing 3: Example code for **SP** usage.

```
LUI SP,#7
LLI SP,#208      ; Set SP to 0x07D0
PUSH R0          ; R0 written to address 0x07CF
PUSH R1          ; R1 written to address 0x07CE
```

```
LDW R0,[SP,#0]   ; R0 = Mem[0x07CE] (R1 initially)
LDW R1,[SP,#1]   ; R1 = Mem[0x07CF] (R0 initially)
POP R1           ; SP moves to 0x07CF
POP R0           ; SP moves to 0x07D0
```

3.3 Sub routine calling convention

Use of a stack frame to pass variables to and from subroutines is recommended when writing assembly for SAMURAI.

Listing 4: Example code for calling subroutines.

```
        PUSH    R0          ; Op1                   ; STEM CALLER
        PUSH    R1          ; Op2
        SUBIB   SP,#1       ; Dummy push
        BWL     .one        ; Run Subroutine
        POP     R0          ; Result
        ADDIB   SP,#2       ; Duummy pop x 2
        ...
.one    PUSH    LR          ; Save link register    ; CALLEE/ CALLER
        PUSH    R0
        PUSH    R1          ; Save caller regs
        PUSH    R2
        PUSH    R3
        PUSH    R4
        LDW     R3,[SP,#6]  ; R3 - Op2
        LDW     R4,[SP,#7]  ; R4 - Op1
        ...
        PUSH    R3
        BWL     .two        ; Nested subroutine
        POP     R3          ; Pass and return
        ...
        STW     R2,[SP,#5]  ; Output on frame
        POP     R4
        POP     R3
        POP     R2
        POP     R1
        POP     R0
        POP     LR
        RET
.two    PUSH    R0          ; No LR save            ; LEAF CALLEE
        LDW     R0,[SP,#1]
```

```
31          ...
32          STW     R0,[SP,#1]
33          POP R0
34          RET
```

3.4 Interrupt Service Routines

On reset, interrupts are disabled on the SAMURAI processor. Two instructions are used to enable and disable interrupts, **ENAI**, **DISI**. These set or clear an internal flag with in the control unit. It is not accessible to the user for reading or branching on it's value. The use of interrupts requires the use of R7 as the stack pointer. The stack pointer should be set up before interrupts are enabled in the program.

The *nIRQ* signal to the SAMURAI processor is an active low, level triggered signal. If the interrupt occurs during an instruction, the instruction is completed before the Interrupt Service Routine (ISR) is entered. The peripheral should hold the *nIRQ* signal low until it has been cleared by the processor.

Maximum time before ISR is entered.

Before the ISR is started, the Program Counter value is stored to the stack. Also, interrupts are automatically disabled once an interrupt is triggered to prevent the processor being continually interrupted. Interrupts must be re-enabled before the ISR is completed by the **ENAI** instruction. The first instruction in the ISR **must be** the store flags instruction, **STF**. The final two instructions in the ISR **must be** load flags **LDF** and return from interrupt **RETI**. The user is responsible for saving all the registers and restoring them before returning.

Nested interrupts are supported on the SAMURAI if required. The initial interrupt must first be cleared. Interrupts can then be re-enabled. If a new interrupt occurs, the ISR is run. Once the second ISR is completed, the program flow is returned to where it was before hand and the first ISR run is then complete.

The ISR can also conduct a function call. However, this is not recommended as the ISR should be short in length.

The general outline for the ISR is:

1. Store Flags

2. Push registers to stack
3. Clear interrupt source
4. Enable interrupts
5. Process data
6. Restore registers
7. Load Flags
8. Return from Interrupt

The ISR is implemented by using the ".isr" or ".ISR" label. It can be placed anywhere in the code and be any length. A general outline in assembly language is shown in listing 5. This structure should be followed for the ISR.

Listing 5: Example outline for the Interrupt Service Routine

```
1  LUI      R7, #7       ;set up stack pointer
2  LLI      R7, #208
3  ENAI                  ;enable the interrupts
4  BR .main              ;go to main
5  .isr     STF ;store flags
6      PUSH R0 ;free some registers to use
7      PUSH R1
8      PUSH R2
9      ;clear interrupt source
10     ENAI    ;enable interrupts
11     ;process data if necessary
12     POP R2  ;restore the registers in reverse order
13     POP R1
14     POP R0
15     LDF ;load the flags
16     RETI    ;end of the ISR
```

If the assembler supports errors about the required instructions, mention this here

any more tips sections?

4 Assembler

The current instruction set architecture includes an assembler for converting assembly language into hexadecimal. This chapter outlines the required formatting and available features of this assembler.

4.1 Instruction Formatting

Each instruction must be formatted using the following syntax. Here "[...]" indicates an optional field:

```
[.LABELNAME] MNEMONIC, OPERANDS, ..., :[COMMENTS]
```

For example:

```
.loop ADDI, R5, R3, #5 :Add 5 to R3
```

Comments may be added by preceding them with either : or ;

Accepted general purpose register values are: R0, R1, R2, R3, R4, R5, R6, R7, SP. These can be upper or lower case and SP is equivalently evaluated to R7.

Branch instructions take a symbolic reference to the destination. Each type of branch supports moving up to 127 lines forward, or 128 lines backwards. But if a branch is over this limitation, the assembler will automatically create additional instructions to enable greater distances. Each additional branch added will cause two more lines of code to be added to the outputted file.

All label names must begin with a '.' while `.ISR`/`.isr` and `.define` are special cases used for the ISR and variable definitions respectively.

Instruction-less or comments only lines are allowed within the assembly file.

Special Case Label

The .ISR/.isr label is reserved for the Interrupt Service Routine and may be located anywhere within the file but must finish with a **RETI** instruction. Branches may occur within the ISR, but are not allowed into this service routine with the exception of a return from a separate subroutine.

4.2 Assembler Directives

Symbolic label names are supported for branch-type instructions. Following the previous syntax definition for '.LABELNAME', they can be used instead of numeric branching provided they branch no further than the maximum distance allowed for the instruction used. Definitions are supported by the assembler. They are used to assign meaningful names to the GPRs to aid with programming. Definitions can occur at any point within the file and create a mapping from that point onwards. Different names can be assigned to the same register, but only one is valid at a time.

The accepted syntax for definitions is:

```
.define NAME REGISTER
```

4.3 Running The Assembler

The assembler is a python executable and is run by typing "./assemble.py". Alternatively, the assembler can be placed in a folder on the users path and executed by running "assemble.py". It supports Python versions 2.4.3 to 2.7.3. A help prompt is given by the script if the usage is not correct, or given a `-h` or `--help` argument.

By default, the script will output the assembled hex to a file with the same name, but with a '.hex' extension in the same directory. The user can specify a different file to use by using a `-o filename.hex` or `--output=filename.hex` argument to the script. The output file can also be a relative or absolute path to a different directory.

The full usage for the script is seen in listing 6. This includes the basic rules for writing the assembly language and a version log.

Listing 6: Assembler help prompt

```
1 Usage: assemble.py [-o outfile] input
```

```
2
3 ---Team R4 Assembler Help---
4
5 -------Version: 1 (CMPI addition onwards)
6                 2 (Changed to final ISA, added special case I's
      and error checking
7                 3 (Ajr changes - Hex output added, bug fix)
8                 4 (Added SP symbol)
9                 5 (NOP support added, help added)
10                6 (Interrupt support added [ENAI, DISI, RETI])
11                7 (Checks for duplicate Labels)
12                8 (Support for any ISR location & automated
      startup code entry)
13                9 (Support for .define)
14               10 (Changed usage)
15     11 (ISR setup shortened, Numeric branching support removed)
16     12 (Branches automatically extended if out of 8-bit range)
17     13 (Comments in hexfile)
18       Current is most recent iteration
19 Input Syntax: ./assemble filename
20 Commenting uses : or ;
21 Labels start with '.': SPECIAL .ISR/.isr -> Interrupt Service
      Routine)
22                         SPECIAL .define -> define new name for
      General Purpose Register, .define NAME R0-R7/SP
23 Instruction Syntax: .[LABELNAME] MNEUMONIC, OPERANDS, ..., :[
      COMMENTS]
24 Registers: R0, R1, R2, R3, R4, R5, R6, R7==SP
25 Branching: Only Symbolic Supported
26
27 Notes:
28         Input files are assumed to end with a .asm extension
29         Immediate value sizes are checked
30         Instruction-less lines allowed
31         .ISR may be located anywhere in file
32         .define may be located anywhere, definition valid from
      location in file onwards, may replace existing definitions
33     Error message line numbers are prefixed with f for assembly
      file and p for preprocessed code
34
35
36 Options:
37   --version             show program's version number and exit
38   -h, --help            show this help message and exit
39   -o FILE, --output=FILE
```

```
40                                output file for the assembled output
```

4.4 Error Messages

This is a list of all the error messages produced by the assembler. Each time an error is thrown, the error number, a brief description and the line it occurred on is displayed before exiting. A 'f' corresponds to a line number in the assembly file, and a 'p' corresponds to the pre-processed code list displayed on screen.

Screenshot of error message

Code	Description
ERROR1	Instruction mnemonic is not recognised
ERROR2	Register code within instruction is not recognised
ERROR3	Branch condition code is not recognised
ERROR4	Attempting to branch to undefined location
ERROR5	Instruction mnemonic is not recognised
ERROR6	Attempting to shift by more than 16 or perform a negative shift
ERROR7	Magnitude of immediate value for ADDI, ADCI, SUBI, SUCI, LDW, STW, CMPI or JMP is too large
ERROR8	Magnitude of immediate value for ADDIB, SUBIB, LUI or LLI is too large
ERROR9	Attempting to jump more than 127 forward or 128 backwards
ERROR10	Duplicate symbolic link names
ERROR11	Illegal branch to ISR
ERROR12	Multiple ISRs in file
ERROR13	Invalid formatting for .define directive
ERROR14	Could not find empty register in first 10 lines for automated ISR setup
ERROR15	Instruction does not have enough operands

5 Programs

Every example program in this section uses R7 as a stack pointer which is initialised to the by the program to 0x07D0.The simulation environment contains an area of an area of memory with 2048 locations and memory mapped deices. There are 16 switches at location 0x0800, 16 LEDs at location 0x0801 and a serial I/O device which can be read from location 0xA000 and has a control register at location 0xA001.

5.1 Multiply

The code for the multiply program is held in Appendix A.1 listing 13. A sixteen bit number is read from input switches, split in to lower and upper bytes which are then multiplied. The resulting sixteen bit word is written to the LEDs before reaching a terminating loop. Equation (1) formally describes the algorithm disregarding limitations.

$$A = M \times Q = \sum_{i=0}^{\infty} 2^i M_i Q \ \ where \ \ M_i \in \{0, 1\} \tag{1}$$

The subroutine operation is described in listing 7, using C. If the result is greater than or equal to 2^{16} the subroutine will fail and return zero. The lowest bit of the multiplier controls the accumulator and the overflow check. The multiplier is shifted right and the quotient is shifted left at every iteration. An unconditional branch is used to keep the algorithm in a while loop. The state of the multiplier is compared at every iteration against zero when the algorithm is finished. As size of the multiplier controls the number of iterations a comparison is made on entry to use the smallest operand.

Listing 7: Multiply Subroutine

```
1  uint16_t multi(uint16_t op1, op2){
2      uint16_t A,M,Q;
3      A = 0;
4      if(op1 < op2){                  // Make M small, less loops
5          M = op1; Q = op2;
6      }else{
7          M = op2; Q = op1;
8      }
9      while(1){                       // No loop counter
10         if(M & 0x0001){             // LSb
```

```
11              A = A + Q;
12              if(A > 0xFFFF){       // Using carry flag
13                  return 0;         // Overflow - fail
14              }
15          }
16          M = M >> 1;
17          if(0 == M){
18              return A;             // Finished - pass
19          }
20          if(Q & 0x8000){
21              return 0;             // Q >= 2^16 - fail
22          }
23          Q = Q << 1;
24      }
25  }
```

5.2 Factorial

The code for the factorial program is held in Appendix A.2 listing 14. It is possible to calculate the factorial of any integer value between 0 and 8 inclusive. The subroutine is called which in turn calls the multiply subroutine discussed in section 5.1. The factorial subroutine does no parameter checking but the multiply code does so if overflow does occur zero is propagated and returned; zero is not a possible factorial. The result is calculated recursively as described using C in listing 8. Large values can cause stack overflow the main body of code makes sure inputs, read from the switches, are sufficiently small.

Listing 8: Recursive Factorial Subroutine

```
1  uint16_t fact(uint16_t x){
2      if(x == 0){
3          return 1;                 // 0! = 1
4      }
5      return multi(x,fact(x-1));    // Recurrsive
6  }
```

5.3 Random

The code for the random program is held in Appendix A.3 listing 15. A random series of numbers is achieved by simulating the 16 bit linear feedback

shift register in Figure 2. This produces a new number every 16 sixteen clock cycles so in this case a simulation subroutine is called 16 times. A seed taken from switches and passed to the first subroutine call via the stack is altered and passed to the next subroutine call. No more stack operations are performed. A load from the stack pointer is used write a new random number to LEDs. All contained within an unconditional branch but a loop counter is used control write and reset.

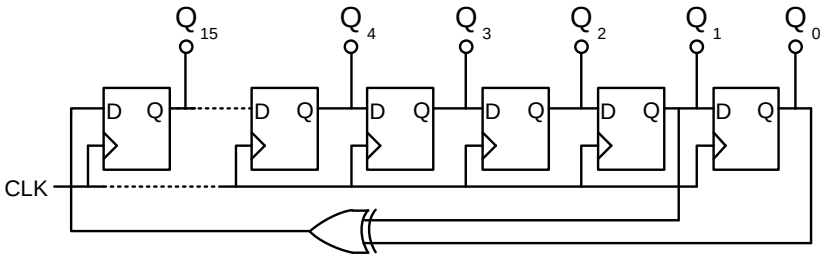

Figure 2: 16 Bit Linear Feedback Shift Register.

A two input `XOR` gate is simulated using the **XOR** operation along with shifting to compare bits in different locations. Bits 2 and 4 are used as inputs so a logical shift left by two is used to align them at the bit 4 position. Masking the output value is used feedback to the top bit. This is described using C in listing 9.

Listing 9: Linear Feedback Shift Register Subroutine

```
uint16_t rand(uint16_t last){
    uint16_t next,test;
    next = last >> 1;                   // The shift
    test = last << 2;                   // Compare different bits
    test = test ^ last;
    if(test & 0x0008){                  // Feedback to top
        return (next | 0x8000);
    }
    return next;
}
```

5.4 Interrupt

The code for the interrupt program is held in Appendix A.4 listing 16. This is the most complex example and makes use of both the multiply and factorial

subroutines in sections 5.1 and 5.2 respectively. The interrupt services the serial device by writing data to a 4 byte circular buffer. A main program check to see if data is in the buffer then and if so calculates the factorial writing the result to the LEDs. The buffer is purposefully small to test overflow.

Listing 10: Serial Device Interrupt Service Request

```
#define TOP      0x0206
#define BOTTOM   0x0202
#define WRITE    0x0201
#define READ     0x0200
#define SERIAL   0xA000

isr(){
    uint16_t data,readPtri,writePtr;
    asm("DISI");                    // critical op
    data = read(SERIAL);
    asm("ENAI");                    // nested ints
    readPtr = read(READ);
    writePtr = read(WRITE);
    if(((readPtr-1) == writePtr)     ||
        (readPtr == BOTTOM)          ||
        (writePtr == (TOP-1))        ){
        asm("RETI");                // full, don't write
    }
    if(readPtr == BOTTOM)
    write(readPtr,data);            // write to buffer
    writePtr++;
    if(writePtr == TOP){
        writePtr = BOTTOM;
    }else{
        writePtr++;
    }
    write(WRITE,writePtr);
    asm("RETI")
}

void main(){
    uint16_t readPtr,writePtri,data;
    do{
        readPtr = read(READ);
        writePtr = read(WRITE);
    }while(readPtr == writePtr)
    data = read(readPtr)
```

```
38
39      fact();
40  }
```

6 Simulation

6.1 Running the simulations

A register window could also be done for this section too

A python script, sim.py, was written to automatically invoke the assembler and simulator. The passed program is only assembled if the file exists with an extension of `.asm`. This allows for raw hex to be passed to the simulator where necessary. If a `.hex` file is passed, and a `.asm` file exists of the same name, the assembler will be invoked. The sim.py script is configured to be run from within the assembler directory.

The usage for the script is:

```
sim.py [-t type] [-m module.sv / -p program.asm ] [ -s
  switchvalue ] [ -gdS ] [+define+extra_definitions]
```

All simulation types are supported. As well as full system simulations, the sim.py script also allows for other testbenches to be run. All stimulus files are maintained in a directory and the testbenches can be run on verilog or magic modules. Where a Magic design is to be simulated, the script automatically extracts the netlist. This is done to prevent the Magic design and netlist being inconsistent.

The sim.py script provides a help prompt when run with `-h` or `--help` arguments. The help prompt is also displayed when incorrect arguments are supplied. The full help prompt is show in listing 11.

By default, the graphical user interface is not invoked. This can be done with the `-g` or `--gui` tags. A debug option, `-d`, exists when the user wants to get the majority of the simulation command, but modify it slightly.

The program and module options should never be defined at the same time. One of them, however, should be. The program option is assembled, if necessary, and defined in the simulation command. The module option checks for the testbench file (identified by *module*_stim.sv) within the verification folder. The testbench is then used as the top level module.

The type of simulation can be any of the folders in the verilog directory, for example *behavioural*, *mixed* or *extracted*. A special type, *magic* can be used. When this is done so, the magic folder, `/design/fcde/magic/design`, is checked for the module given. Type *magic* and a program is equivalent to

an extracted type simulation and is treated as such. The type is also given as a definition to the simulator, allowing reuse of test benches.

The value of the switches can be easily defined by using the `-s` tag. The value given after this option is then passed to the simulator as a definition. If other definitions are required (for example, the serial data file), they can be defined, in full, in the trailing arguments. All trailing arguments are appended to the simulation command, allowing for the user to customise the invocation beyond the scope of the script.

A scan path simulation can also be run. This is done by running `./sim.py -S` and allows the same use described above for invoking the GUI. If the `-S` option is defined, any program or module also given is ignored. The scan path test pulses a signal on the SDI line, and verifies a pulse is seen on the output. The clock cycles, and therefore the number of registers, are counted and reported upon success of the simulation.

Finally, a `-H` or `--home` tag exists to override the default expected location. The script expects to be in the assembler directory within the verilog folder. If an absolute path is passed, the script will use this as the base directory with the *behavioural*, *mixed* and *extracted* folders in. A relative path can be passed. This should be the path from the folder the script is run from to the verilog directory.

Listing 11: Help prompt for the sim.py script.

```
Usage: sim.py [-t type] [-m module.sv / -p program.asm ] [ -s
    switchvalue ] [ -gdS ] [+define+extra_definitions]

trailing arguments are given to the simulator directly

Options:
  --version             show program's version number and exit
  -h, --help            show this help message and exit
  -m MODULE, --module=MODULE
                        module to simulate - should not be
    defined if program
                        is
  -t TYPE, --type=TYPE  Type of simulation to run, e.g.
    behavioural (default),
                        mixed, extracted, magic
  -p PROGRAM, --prog=PROGRAM
                        program to run should not be defined if
    module is. Hex
                        or ASM can be passed. ASM files will be
```

```
    assembled
16                          before running the simulator.
17  -g, --gui               Run the simulation with a GUI
18  -s SWITCHES, --switches=SWITCHES
19                          Value of switches to pass to the
    simulation
20  -d                      Make, but don't execute, the command
21  -S, --scanpath          Run the scan path simulation
```

6.2 Serial Data

The serial data file used is located in the programs directory. This is a hex file with white space separated values of the form *"time data"*. Both values are given as hexadecimal numbers. The data is then sent at the time to the processor by the serial module. An example serial data hex file is shown in listing 12.

Listing 12: Example serial data file

```
1  // Hex file to specify serial data input
2  //
3  //
4    248    7
5    48F    6
6    6D6    5
7    91D    4
8    B64    7
9    DAB    5
10   36B1     3
11   6D61     2
```

6.3 Run Time

The number of clock cycles for each program to fully run is shown in table 1. Factorial run time is given for an input of 8 and is the worst case. Random is the time taken to compute a new value of the pseudo-random sequence. Interrupt is dependant on the serial data input and the time is given for the serial data file mentioned above.

Table 1: Clock cycles required for each program to run

Program	Clock Cycles
Multiply	1,100
Factorial	5,700
Random	2,500
Interrupt	30,000

6.4 Simulation

A dissembler is also implemented in System Verilog to aid debugging. It is an ASCII formatted array implemented at the top level of the simulation. It is capable of reading the instruction register with in the design, and reconstructing the assembly language of the instruction and is supported in behavioural, mixed and extracted simulations. It will show the opcode, register addresses and immediate values. It is automatically included by the TCL script. The TCL script also opens a waveform window and adds important signals.

Put a screen shot of the waveform window?

A Code Listings

All code listed in this section is passed to the assembler *as is* and has been verfied using the final design of the processor.

A.1 Multiply

Listing 13: multiply.asm

```
1          LUI     SP, #7          ; Init SP
2          LLI     SP, #208
3          LUI     R3, #8          ; SWs addr
4          LLI     R3, #0
5          LDW     R0,[R3,#0]      ; READ SWs
6          LUI     R1, #0
7          LLI     R1, #255        ; 0x00FF in R1
8          AND     R1,R0,R1        ; Lower byte SWs in R1
9          LSR     R0,R0,#8        ; Upper byte SWs in R0
10         PUSH    R0              ; Op1
11         PUSH    R1              ; Op2
12         SUB     R2,R2,R2        ; Zero required
13         PUSH    R2              ; Place holder is zero
14         BWL     .multi          ; Run Subroutine
15         POP     R1              ; Result
16         ADDIB   SP,#2           ; Duummy pop
17         ADDIB   R3,#1           ; Address of LEDS
18         STW     R1,[R3,#0]      ; Result on LEDS
19 .end    BR      .end            ; Finish loop
20 .multi  PUSH    R0
21         PUSH    R1
22         PUSH    R2
23         PUSH    R3
24         PUSH    R4
25         PUSH    R5
26         PUSH    R6
27         LDW     R0,[SP,#8]      ; R0 - Multiplier
28         LDW     R1,[SP,#9]      ; R1 - Quotient
29         CMP     R0,R1
30         BLT     .nSw            ; Branch if M < Q
31         ADDI    R2,R1,#0        ; Make M the smallest
32         ADDI    R1,R0,#0
33         ADDI    R0,R2,#0
34 .nSw    SUB     R2,R2,R2        ; R2 - Accumulator
35         ADDI    R3,R2,#1        ; R3 - 0x0001
```

```
36          LUI     R4,#128     ; R4 - 0x8000
37          LLI     R4,#0
38  .mloop  AND     R6,R0,R3    ; R6 - Cmp var
39          CMPI    R6,#1
40          BNE     .nAcc
41          SUB     R3,R3,R3
42          ADD     R2,R2,R1    ; A = A + Q
43          ADCI    R3,R3,#1
44          CMPI    R3,#2
45          BE      .fail       ; OV
46  .nAcc   LSR     R0,R0,#1    ; M = M >> 1
47          CMPI    R0,#0
48          BE      .done
49          AND     R5,R4,R1
50          CMPI    R5,#0
51          BNE     .fail
52          LSL     R1,R1,#1    ; Q = Q << 1
53          BR      .mloop
54  .done   STW     R2,[SP,#7]  ; Res on stack frame
55          POP     R6
56          POP     R5
57          POP     R4
58          POP     R3
59          POP     R2
60          POP     R1
61          POP     R0
62          RET
63  .fail   SUB     R2,R2,R2    ; OV - ret 0
64          BR      .done
```

A.2 Factorial

Listing 14: factorial.asm

```
1           LUI     R7, #7
2           LLI     R7, #208
3           LUI     R0, #8      ; Address in R0
4           LLI     R0, #0
5           LDW     R1,[R0,#0]  ; Read switches into R1
6           PUSH    R1          ; Pass para
7           BWL     .fact       ; Run Subroutine
8           POP     R3          ; Para overwritten with result
9           ADDIB   R0,#1
10          STW     R3,[R0,#0]  ; Result on LEDS
```

```
11 .end     BR      .end        ;  finish loop
12 .fact    PUSH    R0
13          PUSH    R1
14          PUSH    LR
15          LDW     R1,[SP,#3]  ; Get para
16          ADDIB   R1,#0
17          BE      .retOne       ; 0! = 1
18          SUBI    R0,R1,#1
19          PUSH    R0          ; Pass para
20          BWL     .fact       ; The output remains on the stack
21          PUSH    R1          ; Pass para
22          SUBIB   SP,#1       ; Placeholder
23          BWL     .multi
24          POP     R1          ; Get res
25          ADDIB   SP,#2       ; pop x 2
26          STW     R1,[SP,#3]
27          POP     LR
28          POP     R1
29          POP     R0
30          RET
31 .retOne  ADDIB   R1,#1       ; Avoid jump checking
32          STW     R1,[SP,#3]
33          POP     LR
34          POP     R1
35          POP     R0
36          RET
37 .multi   PUSH    R0
38          PUSH    R1
39          PUSH    R2
40          PUSH    R3
41          PUSH    R4
42          PUSH    R5
43          PUSH    R6
44          LDW     R0,[SP,#8]  ; R0 - Multiplier
45          LDW     R1,[SP,#9]  ; R1 - Quotient
46          CMP     R0,R1
47          BLT     .nSw        ; Branch if M < Q
48          ADDI    R2,R1,#0    ; Make M the smallest
49          ADDI    R1,R0,#0
50          ADDI    R0,R2,#0
51 .nSw     SUB     R2,R2,R2    ; R2 - Accumulator
52          ADDI    R3,R2,#1    ; R3 - 0x0001
53          LUI     R4,#128     ; R4 - 0x8000
54          LLI     R4,#0
55 .mloop   AND     R6,R0,R3    ; R6 - Cmp var
```

```
56          CMPI    R6,#1
57          BNE     .nAcc
58          SUB     R3,R3,R3
59          ADD     R2,R2,R1        ; A = A + Q
60          ADCI    R3,R3,#1
61          CMPI    R3,#2
62          BE      .fail           ; OV
63  .nAcc   LSR     R0,R0,#1        ; M = M >> 1
64          CMPI    R0,#0
65          BE      .done
66          AND     R5,R4,R1
67          CMPI    R5,#0
68          BNE     .fail
69          LSL     R1,R1,#1        ; Q = Q << 1
70          BR      .mloop
71  .done   STW     R2,[SP,#7]      ; Res on stack frame
72          POP     R6
73          POP     R5
74          POP     R4
75          POP     R3
76          POP     R2
77          POP     R1
78          POP     R0
79          RET
80  .fail   SUB     R2,R2,R2        ; OV - ret 0
81          BR      .done
```

A.3 Random

Listing 15: random.asm

```
1           LUI     SP,#7           ; Init SP
2           LLI     SP,#208
3           LUI     R0,#8           ; SW Address in R0
4           LLI     R0,#0
5           LDW     R1,[R0,#0]      ; Read switches into R1
6           ADDIB   R0,#1           ; Address of LEDS in R0
7           PUSH    R1
8   .reset  SUB     R4,R4,R4        ; Reset Loop counter
9   .loop   BWL     .rand
10          CMPI    R4,#15
11          BE      .write
12          ADDIB   R4,#1           ; INC loop counter
13          BR      .loop
```

```
14 .write   LDW     R1,[SP,#0]   ; No pop as re-run
15          STW     R1,[R0,#0]   ; Result on LEDS
16          BR      .reset
17 .rand    PUSH    R0           ; LFSR Sim
18          PUSH    R1           ; Protect regs
19          PUSH    R2
20          LDW     R0,[SP,#3]   ; Last reg value
21          LSR     R0,R0,#1     ; Shifted reg
22          XOR     R1,R0,R1     ; xor 0 and 1
23          LUI     R2,#0
24          LLI     R2,#1
25          AND     R1,R2,R1     ; Mask off Bit 0
26          CMPI    R1,#0
27          BE      .done
28          LSL     R1,R2,#15
29          OR      R0,R0,R1     ; or with 0x8000
30 .done    STW     R0,[SP,#3]
31          POP     R2
32          POP     R1
33          POP     R0
34          RET
```

A.4 Interrupt

Listing 16: interrupt.asm

```
1           DISI                 ; Reset is off anyway
2           LUI     R7, #7
3           LLI     R7, #208
4           LUI     R0, #2       ; R0 is read ptr    0x0200
5           LLI     R0, #0
6           ADDI    R1,R0,#2     ; 0x0202
7           STW     R1,[R0,#0]   ; Read ptr set to   0x0202
8           STW     R1,[R0,#1]   ; Write ptr set to  0x0202
9           LUI     R0,#160      ; Address of Serial control reg
10          LLI     R0,#1
11          LUI     R1,#0
12          LLI     R1,#1        ; Data to enable ints
13          STW     R1,[R0,#0]   ; Store 0x001 @ 0xA001
14          ENAI
15 .main    LUI     R0, #2       ; Read ptr address in R0
16          LLI     R0, #0
17          LDW     R2,[R0,#0]   ; Read ptr in R2
18          LDW     R3,[R0,#1]   ; Write ptr in R3
```

```
19          CMP     R2,R3
20          BE      .main           ; Jump back if the same
21          LDW     R3,[R2,#0]      ; Load data out of buffer
22          ADDIB   R2,#1           ; Inc read ptr
23          SUB     R0,R0,R0
24          LUI     R0,#2
25          LLI     R0,#6
26          SUB     R0,R0,R2
27          BNE     .wrapR
28          SUBIB   R2,#4
29  .wrapR  LUI     R0, #2          ; Read ptr address in R0
30          LLI     R0, #0
31          STW     R2,[R0,#0]      ; Store new read pointer
32          SUB     R4,R4,R4
33          LLI     R4,#15
34          AND     R3,R4,R3
35          CMPI    R3,#8
36          BE      .do
37          LLI     R4,#7
38          AND     R3,R3,R4
39  .do     PUSH    R3
40          BWL     .fact
41          POP     R3
42          LUI     R4,#8
43          LLI     R4,#1           ; Address of LEDs
44          STW     R3,[R4,#0]      ; Put factorial on LEDs
45          BR      .main             ; look again
46  .fact   PUSH    R0
47          PUSH    R1
48          PUSH    LR
49          LDW     R1,[SP,#3]      ; Get para
50          ADDIB   R1,#0
51          BE      .retOne           ; 0! = 1
52          SUBI    R0,R1,#1
53          PUSH    R0              ; Pass para
54          BWL     .fact           ; The output remains on the stack
55          PUSH    R1              ; Pass para
56          SUBIB   SP,#1           ; Placeholder
57          BWL     .multi
58          POP     R1              ; Get res
59          ADDIB   SP,#2           ; pop x 2
60          STW     R1,[SP,#3]
61          POP     LR
62          POP     R1
63          POP     R0
```

```
64          RET
65  .retOne ADDIB   R1,#1          ; Avoid jump checking
66          STW     R1,[SP,#3]
67          POP     LR
68          POP     R1
69          POP     R0
70          RET
71  .multi  PUSH    R0
72          PUSH    R1
73          PUSH    R2
74          PUSH    R3
75          PUSH    R4
76          PUSH    R5
77          PUSH    R6
78          LDW     R0,[SP,#8]  ; R0 - Multiplier
79          LDW     R1,[SP,#9]  ; R1 - Quotient
80          CMP     R0,R1
81          BLT     .nSw        ; Branch if M < Q
82          ADDI    R2,R1,#0    ; Make M the smallest
83          ADDI    R1,R0,#0
84          ADDI    R0,R2,#0
85  .nSw    SUB     R2,R2,R2    ; R2 - Accumulator
86          ADDI    R3,R2,#1    ; R3 - 0x0001
87          LUI     R4,#128     ; R4 - 0x8000
88          LLI     R4,#0
89  .mloop  AND     R6,R0,R3    ; R6 - Cmp var
90          CMPI    R6,#1
91          BNE     .nAcc
92          SUB     R3,R3,R3
93          ADD     R2,R2,R1    ; A = A + Q
94          ADCI    R3,R3,#1
95          CMPI    R3,#2
96          BE      .fail       ; OV
97  .nAcc   LSR     R0,R0,#1    ; M = M >> 1
98          CMPI    R0,#0
99          BE      .done
100         AND     R5,R4,R1
101         CMPI    R5,#0
102         BNE     .fail
103         LSL     R1,R1,#1    ; Q = Q << 1
104         BR      .mloop
105 .done   STW     R2,[SP,#7]  ; Res on stack frame
106         POP     R6
107         POP     R5
108         POP     R4
```

```
109             POP     R3
110             POP     R2
111             POP     R1
112             POP     R0
113             RET
114 .fail       SUB     R2,R2,R2        ; OV - ret 0
115             BR      .done
116 .isr        STF                     ; Keep flags, disable auto
117             PUSH    R0              ; Save only this for now
118             LUI     R0,#160
119             LLI     R0,#0
120             LDW     R0,[R0,#0]      ; R1 contains read serial data
121             ENAI                    ; Don't miss event
122             PUSH    R1
123             PUSH    R2
124             PUSH    R3
125             PUSH    R4
126             LUI     R1,#2
127             LLI     R1,#0
128             LDW     R2,[R1,#0]      ; R2 contains read ptr
129             ADDI    R3,R1,#1
130             LDW     R4,[R3,#0]      ; R4 contain the write ptr
131             SUBIB   R2,#1           ; Get out if W == R - 1
132             CMP     R4,R2
133             BE      .isrOut
134             ADDIB   R2,#1
135             LUI     R1,#2
136             LLI     R1,#2
137             CMP     R2,R1
138             BNE     .write
139             ADDIB   R1,#3
140             CMP     R4,R1
141             BE      .isrOut
142 .write      STW     R0,[R4,#0]      ; Write to buffer
143             ADDIB   R4,#1
144             LUI     R1,#2
145             LLI     R1,#6
146             CMP     R1,R4
147             BNE     .wrapW
148             SUBIB   R4,#4
149 .wrapW      STW     R4,[R3,#0]      ; Inc write ptr
150 .isrOut     POP     R4
151             POP     R3
152             POP     R2
153             POP     R1
```

```
154             POP     R0
155             LDF
156             RETI
```

B Declaration of Work

Table 2 shows the break down of the work for this programming guide. Where multiple team members contributed to a section, approximate work percentages are given.

Table 2: Work Breakdown for the Programmers Guide

Chapter	User
Introduction	hl13g10
Register Description	arr1g13 (50%), hl13g10 (50%)
Instruction Set	mw20g10
Programming Tips	ajr2g10 (50%), hl13g10 (50%)
Assembler	mw20g10 (75%), hl13g10 (50%)
Programs	ajr2g10
Simulation	hl13g10
Code Listings	ajr2g10