

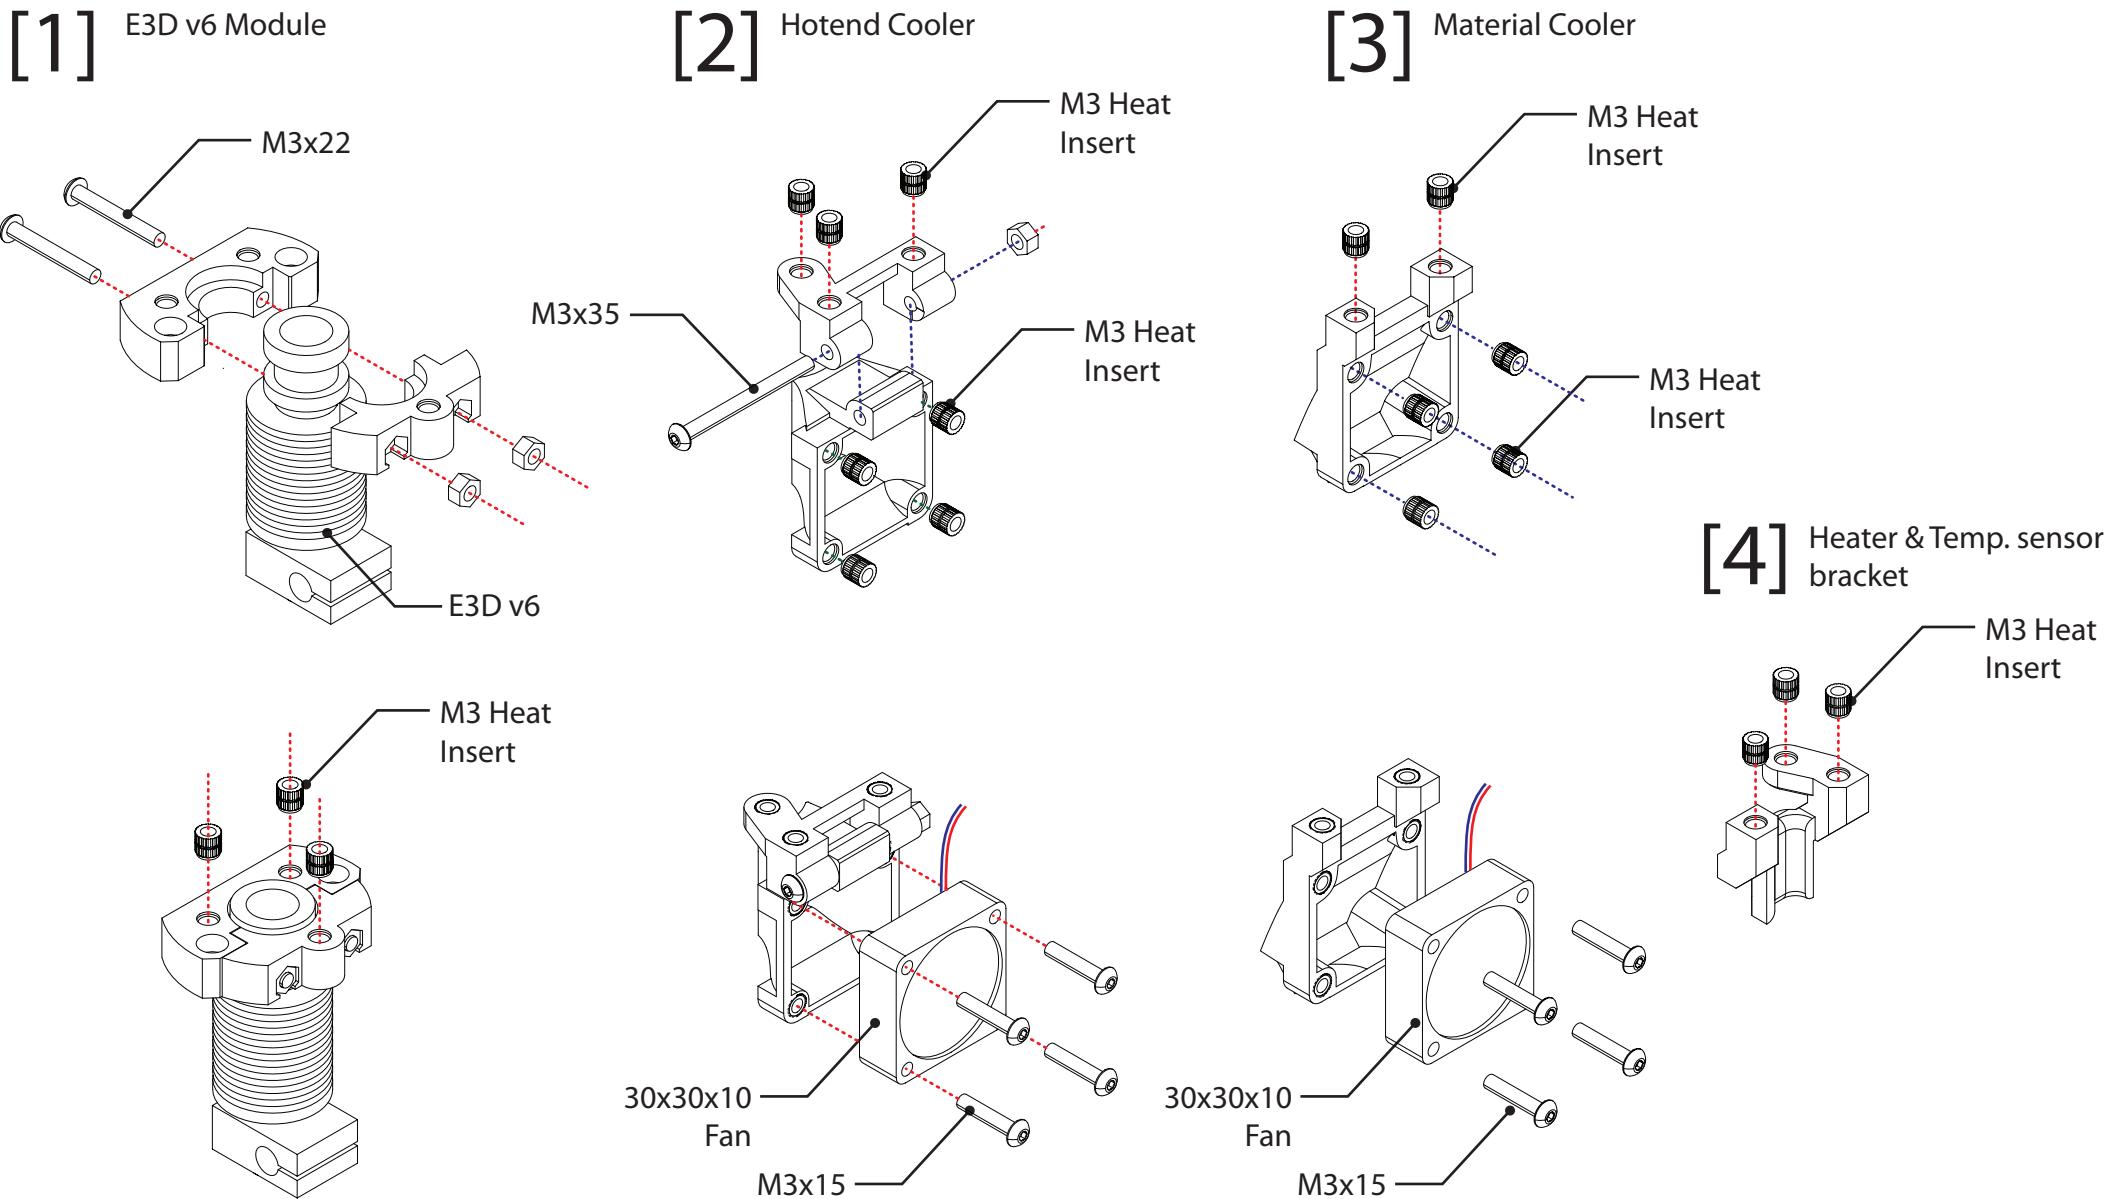
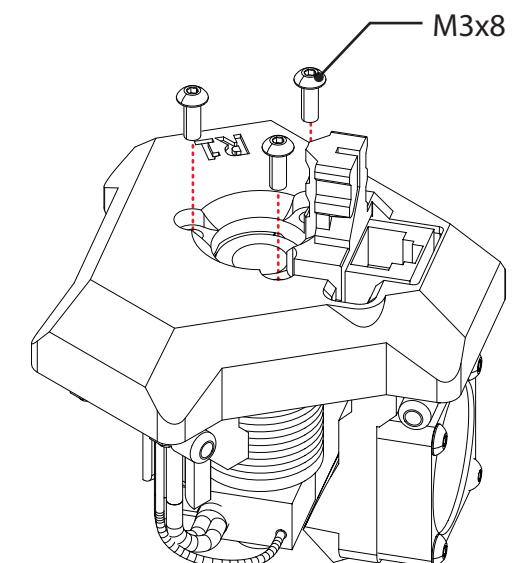
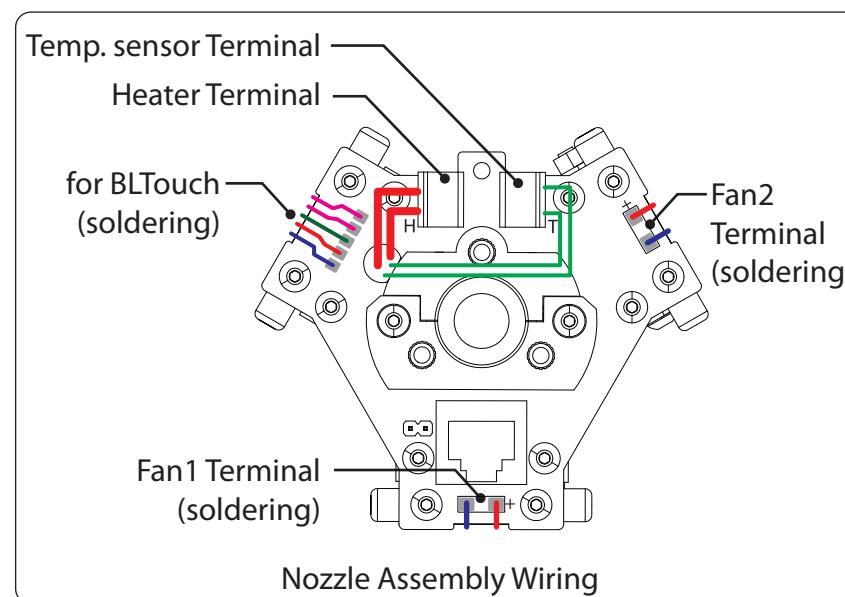
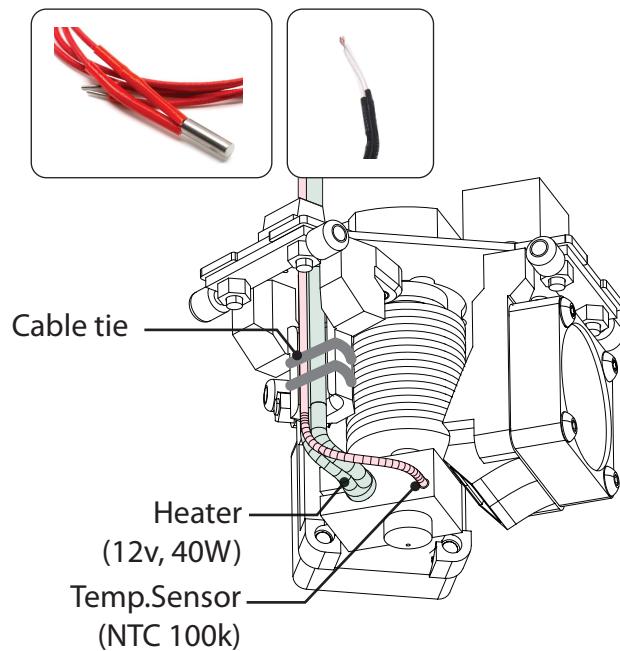
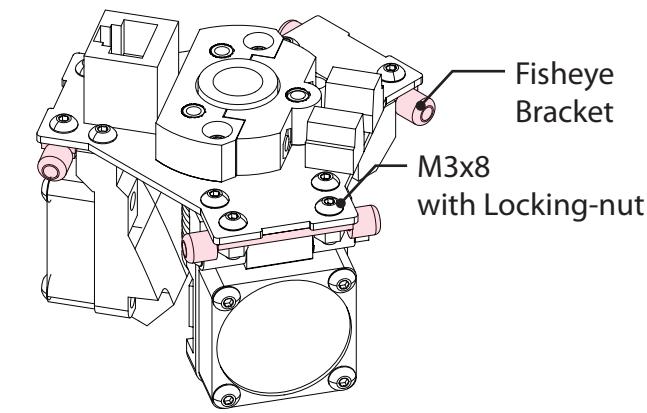




Print Head Assembly

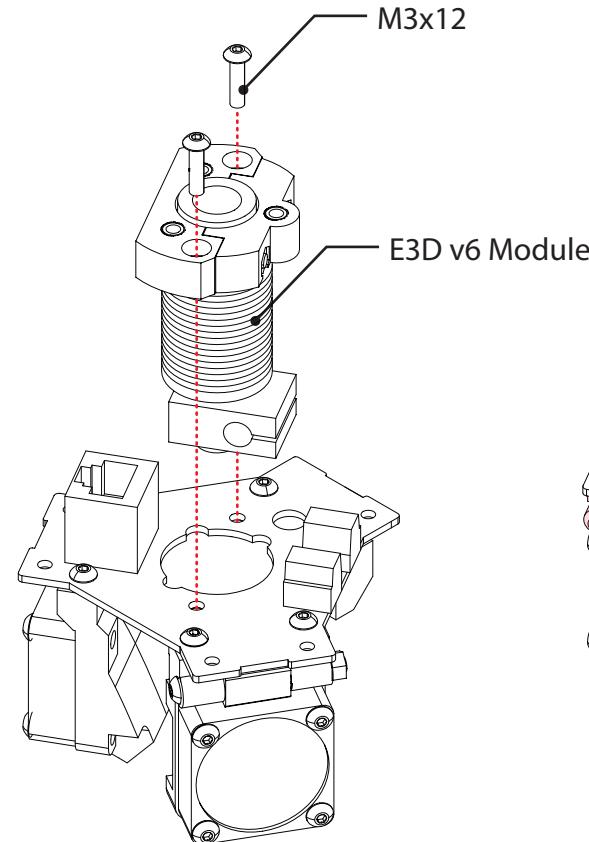


[5]

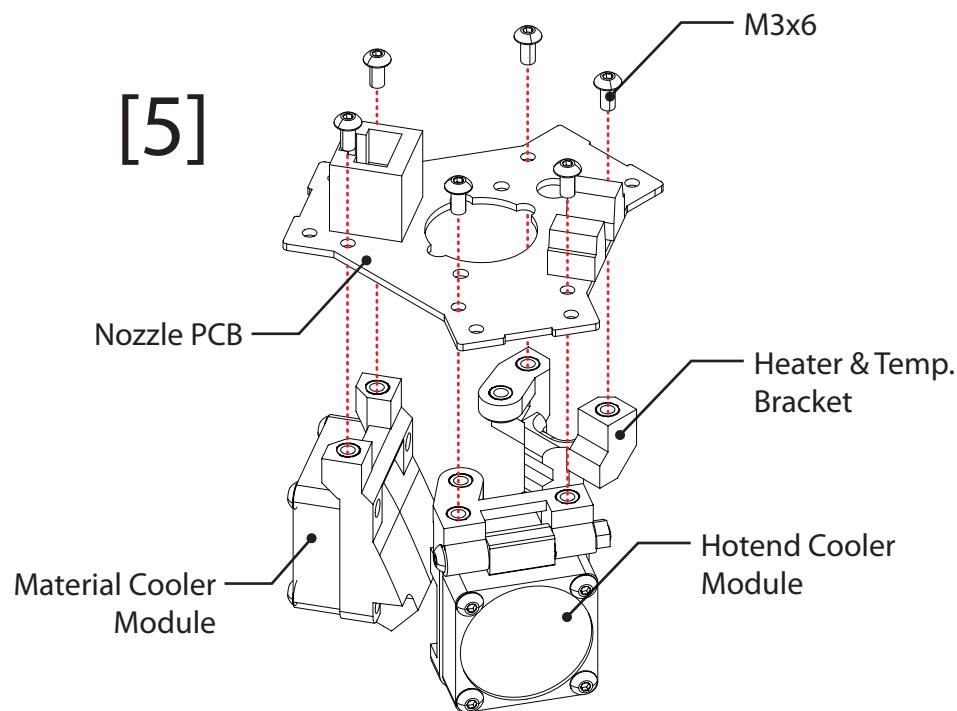


- To make arm assembly, you need 6 arms. To make lighter, carbon rods recommended. Length for center to center of Rodend Bearings must be "215mm"

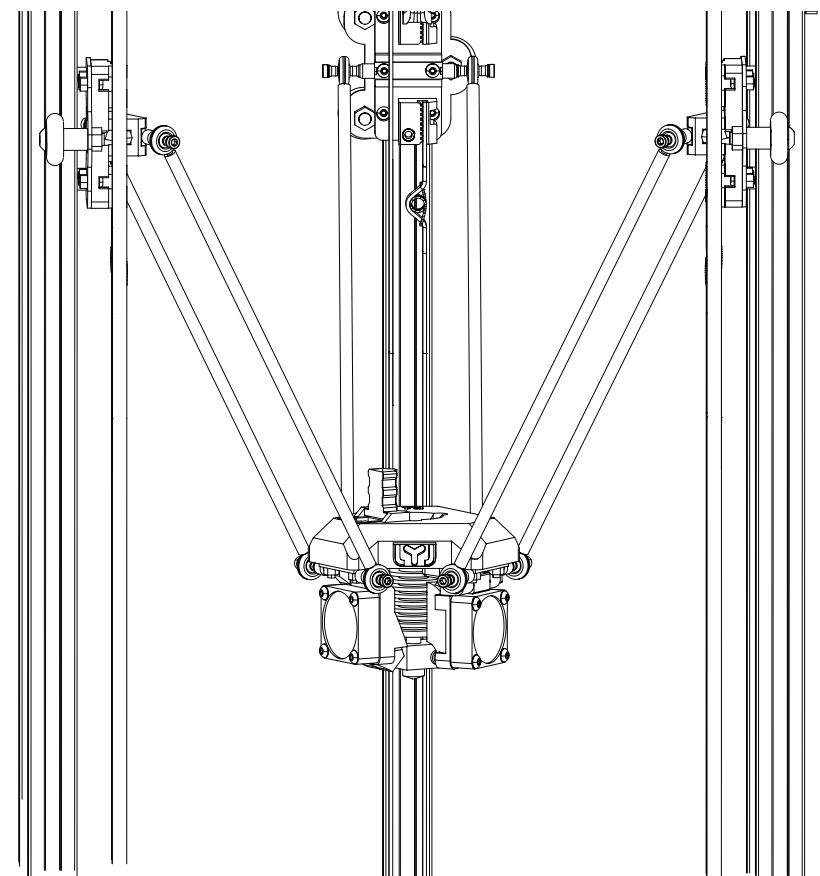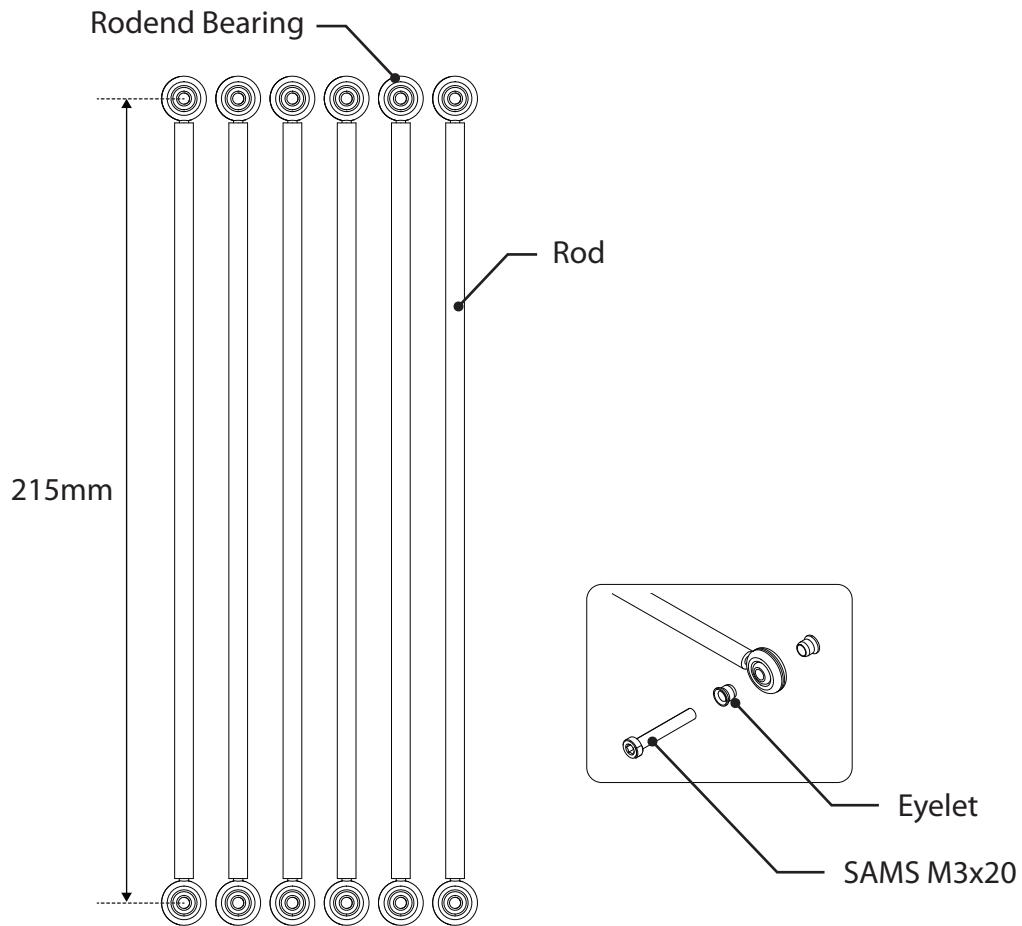


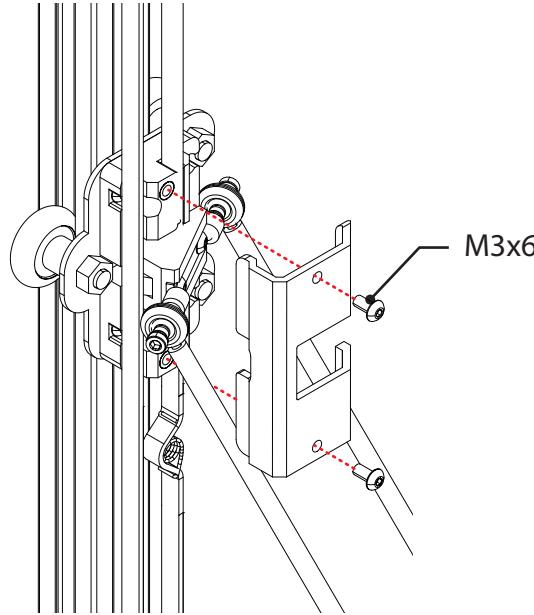


X slider cover
(Y slider cover is mirrored shape)

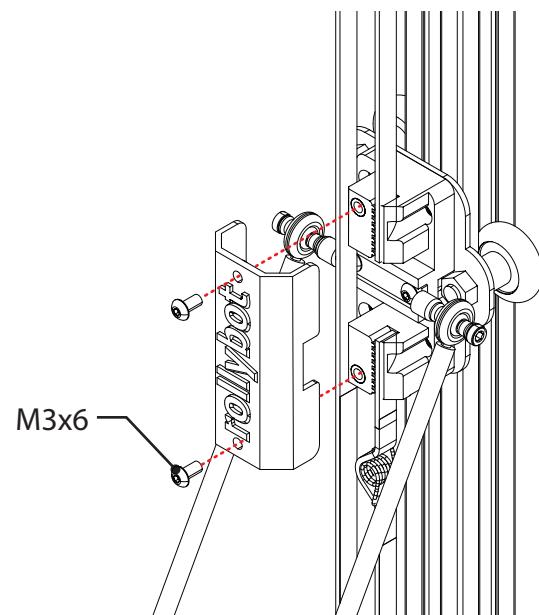


Z slider cover


Filament Tube and Hotend wire connecting

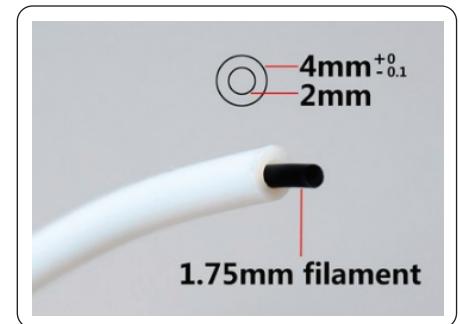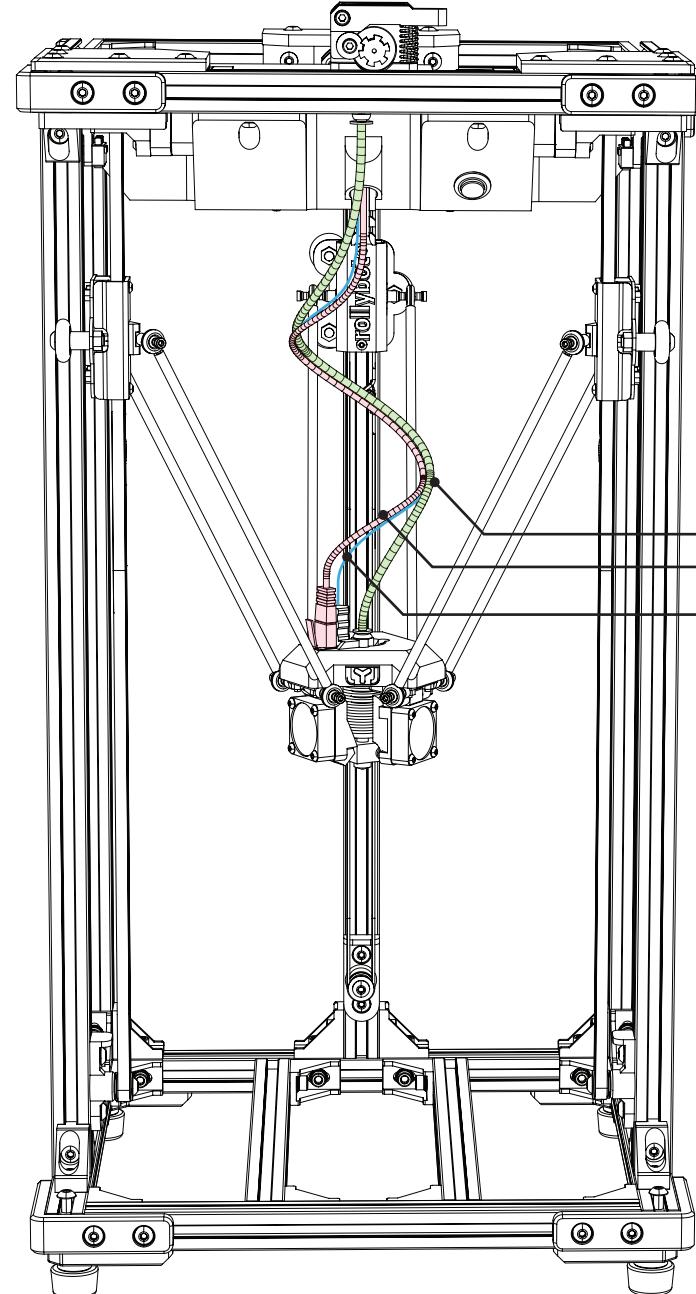

Filament Tube
Hotend Wire (Direct LAN cable)
Heater wire(Dupont 2pin female)

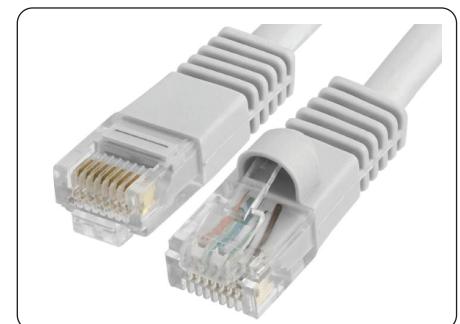


Direct UTP (24AWG)

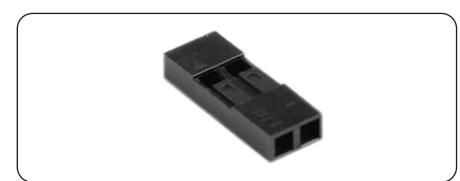


Dupont 2pin female

Motor and Endstops Wiring

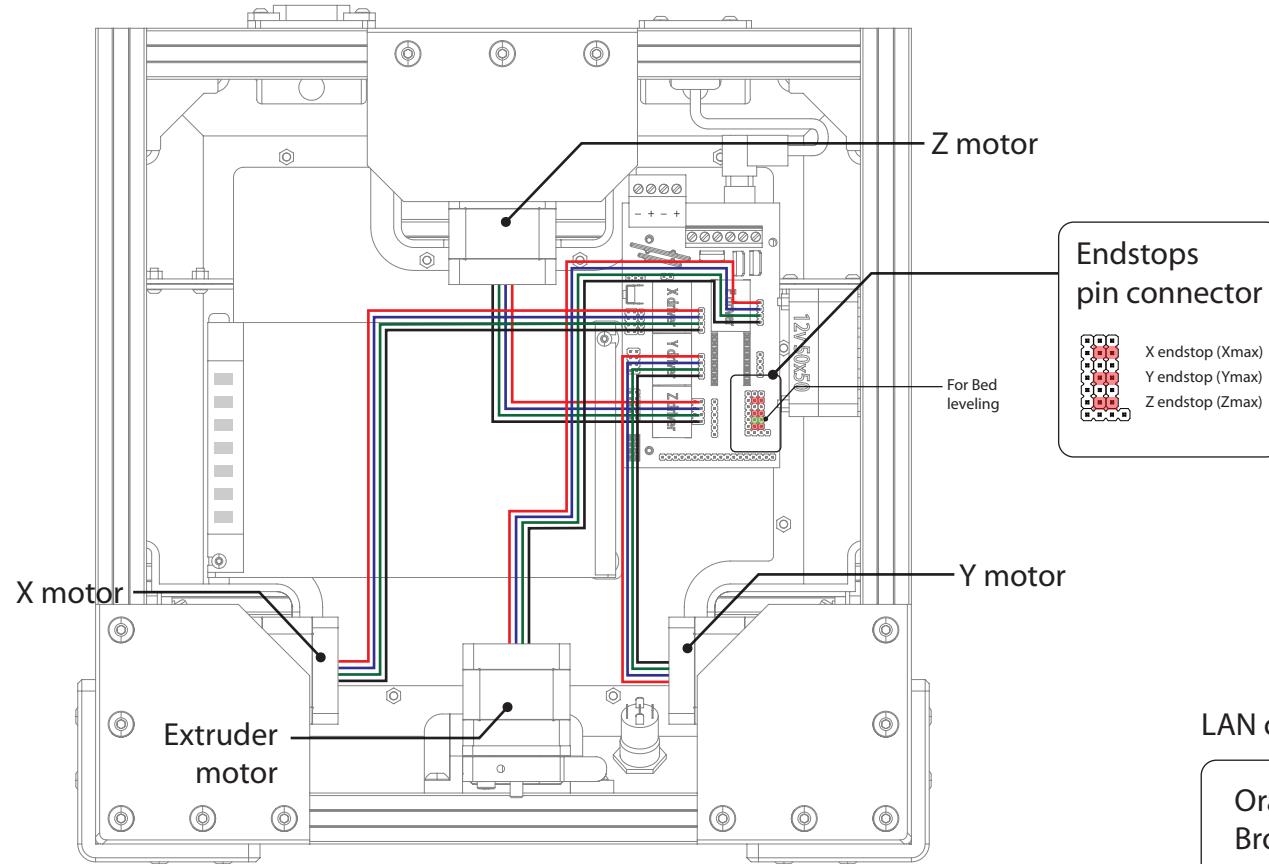

LAN cable wiring


Orange : Temperature Sensor (no polarity)
 Brown : BLtouch wiring for Zmin
 Green : Fan
 Blue : 5V / Servo signal

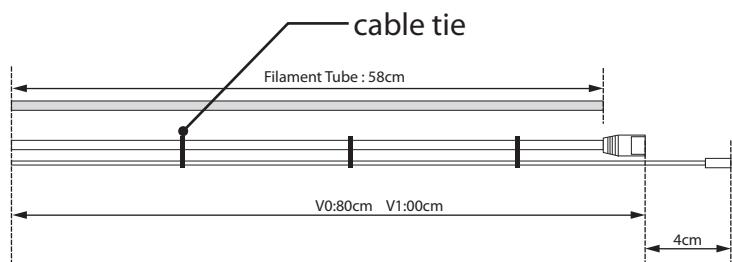



Recommended cable length

2wire cable
(for Heater)


Direct
LAN cable

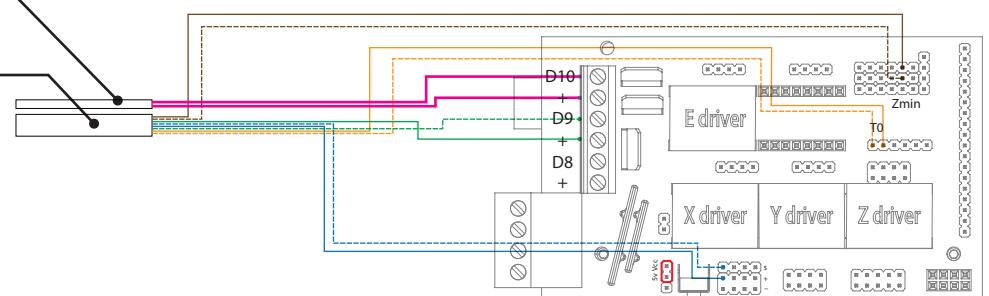

Display Assembly

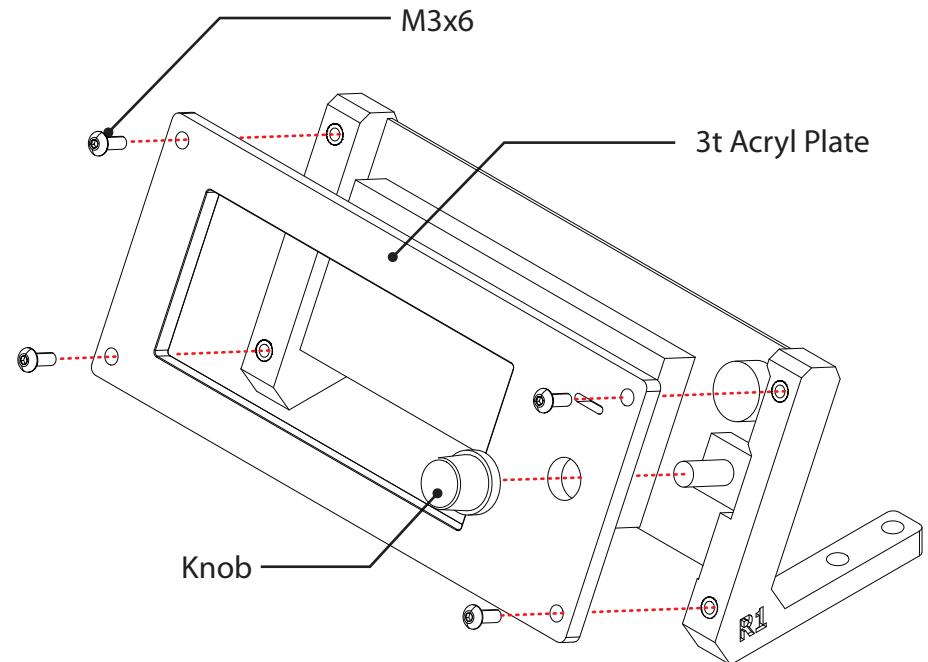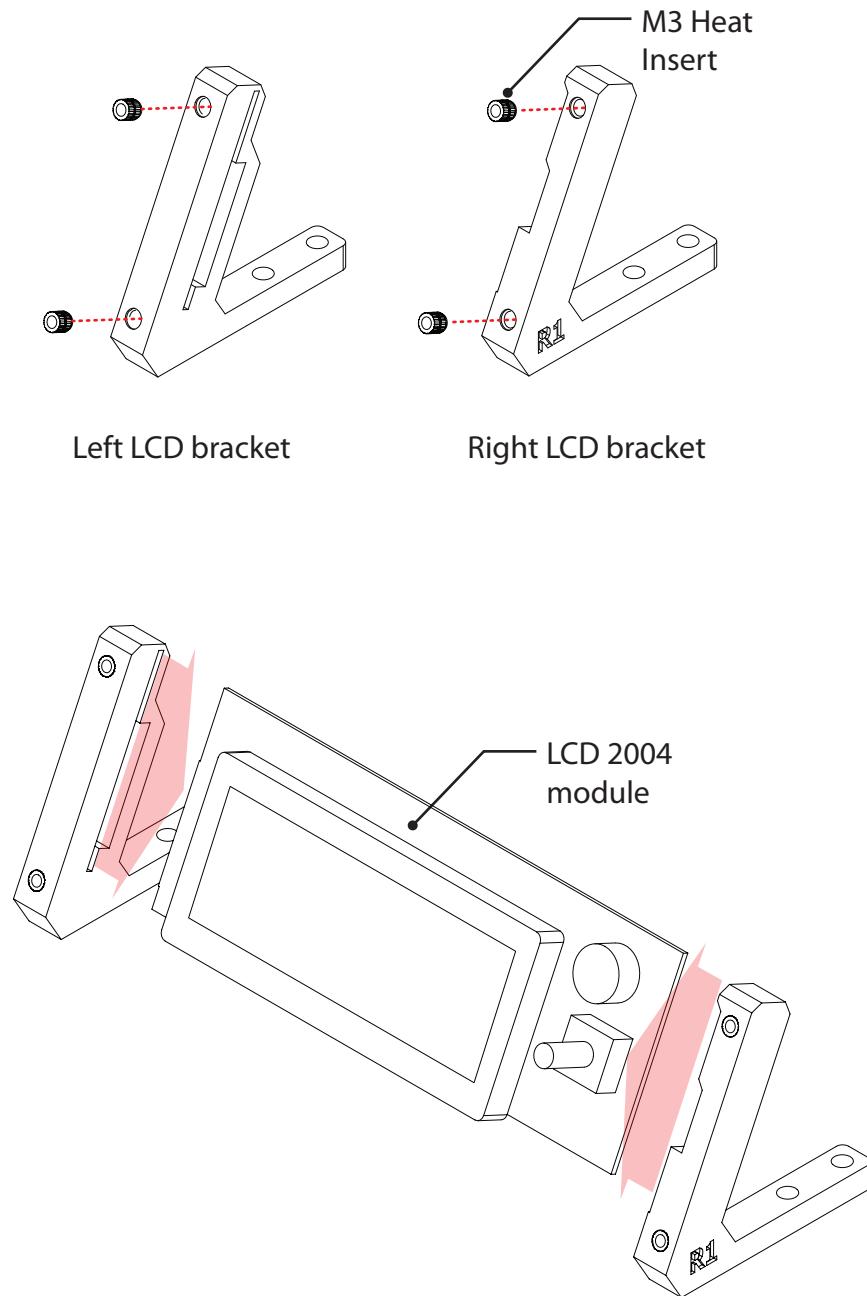



LCD wiring

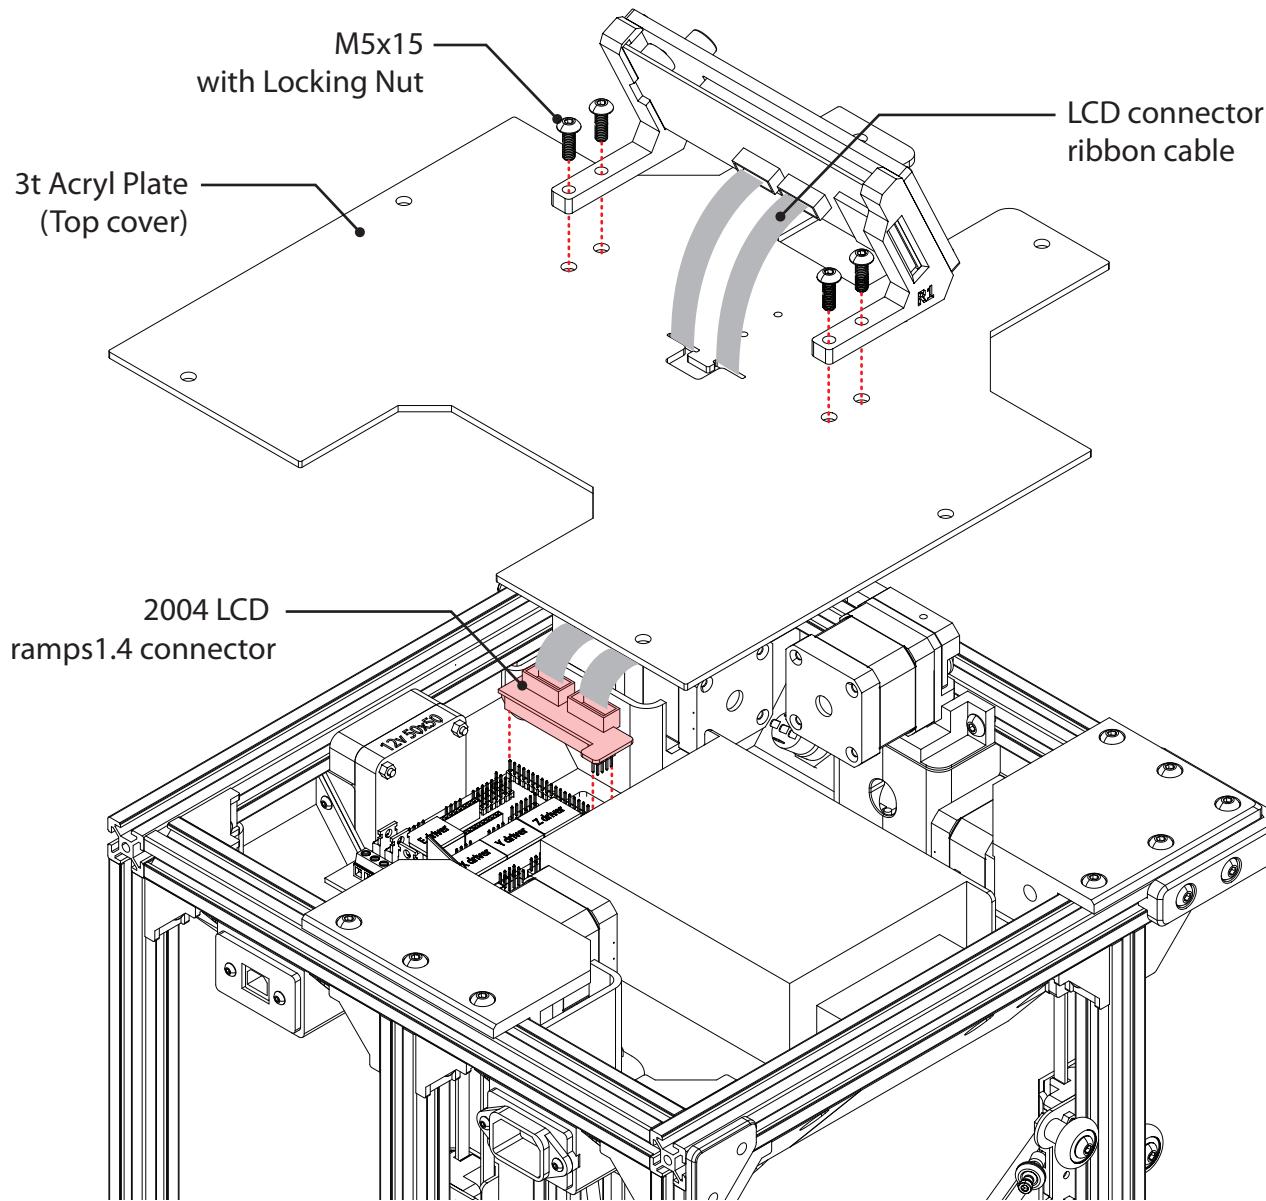


2004 LCD set

Top cover plate assembly


M5x8
with M5 blind nut

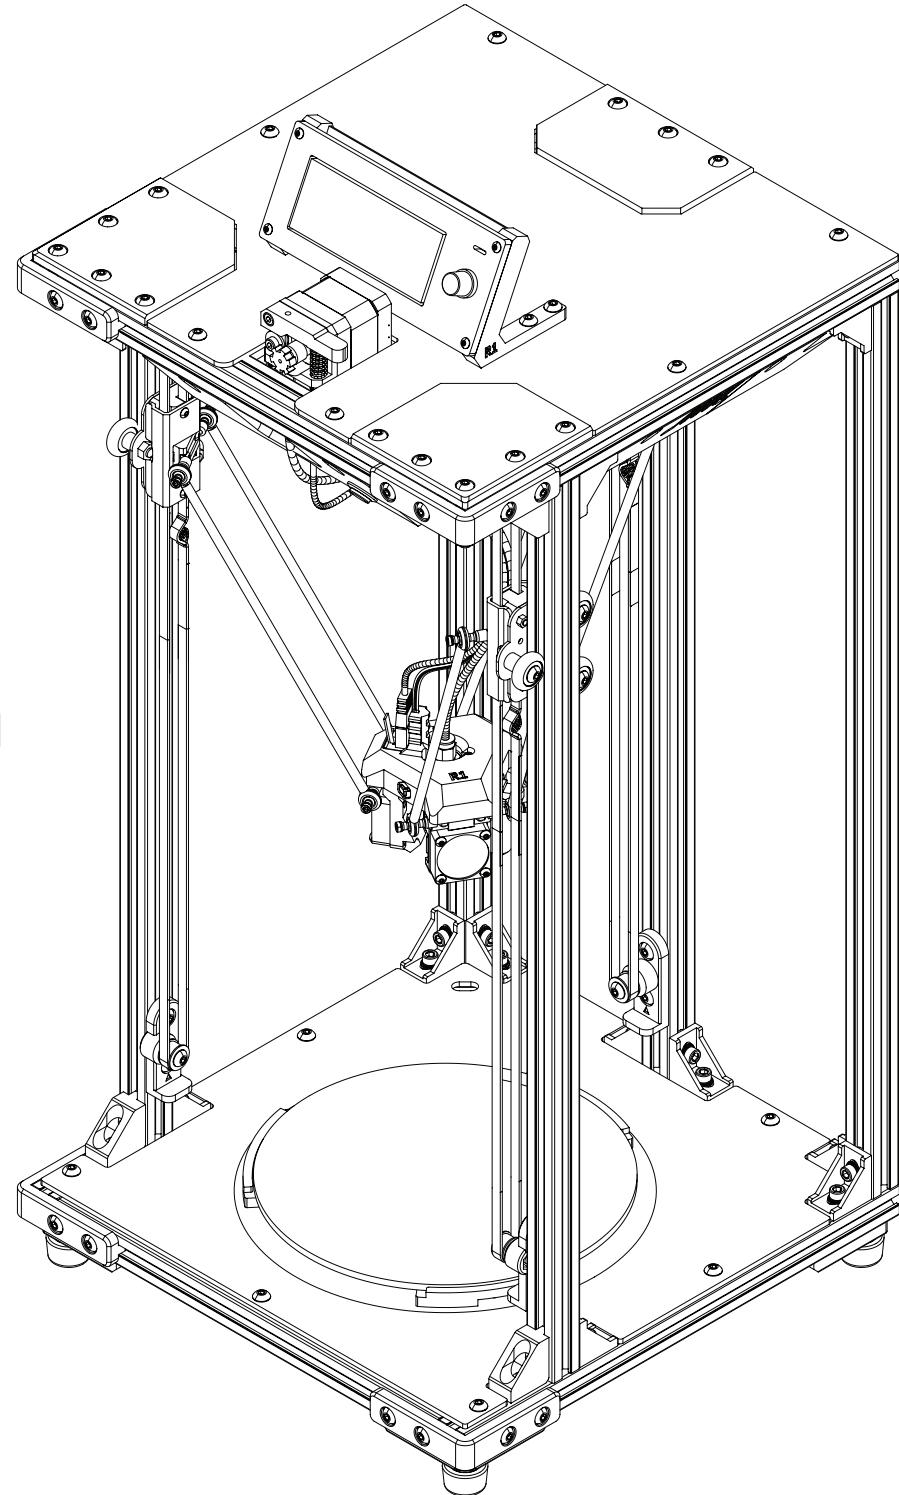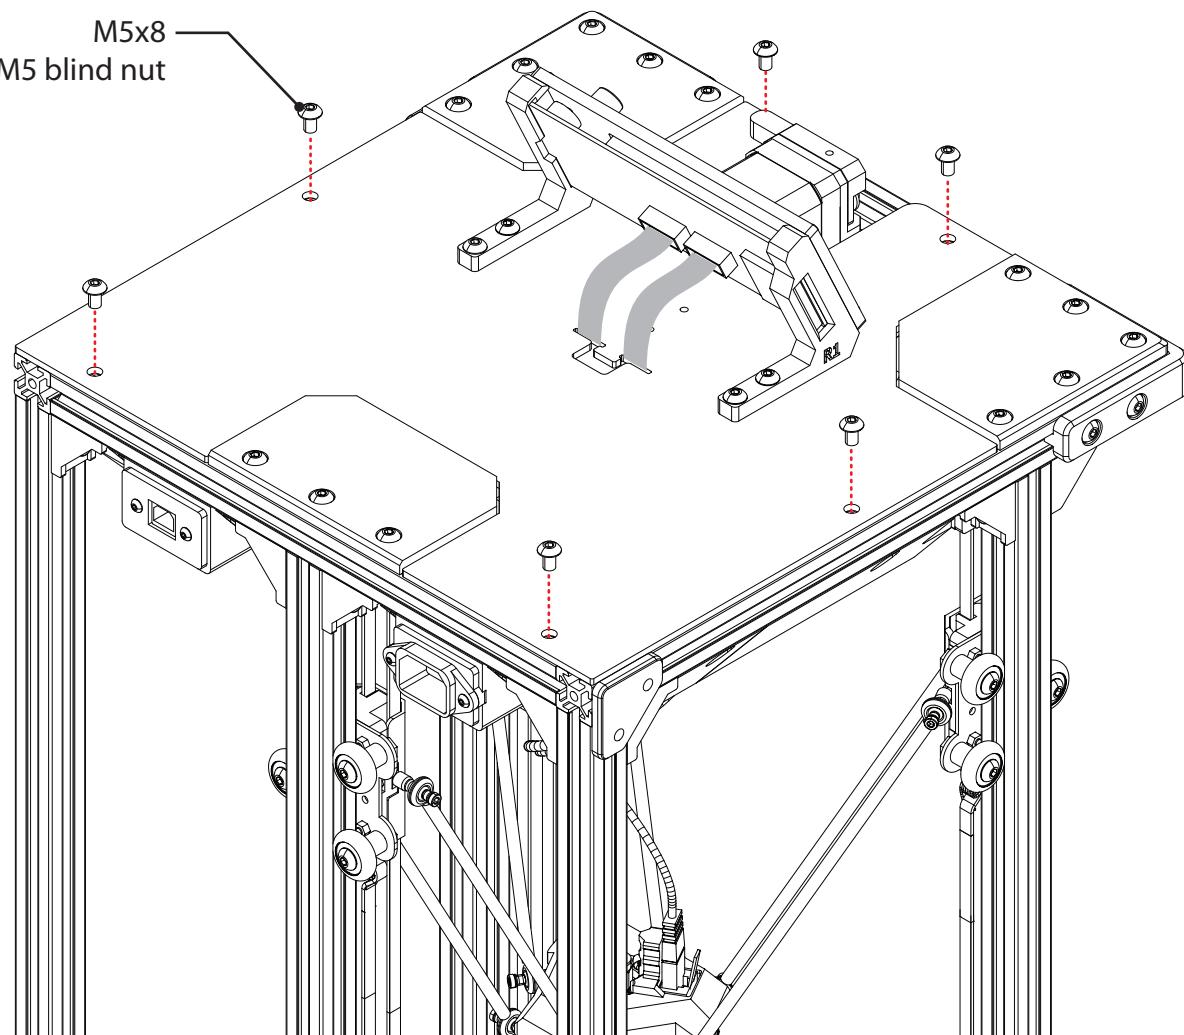


Spool Bridge

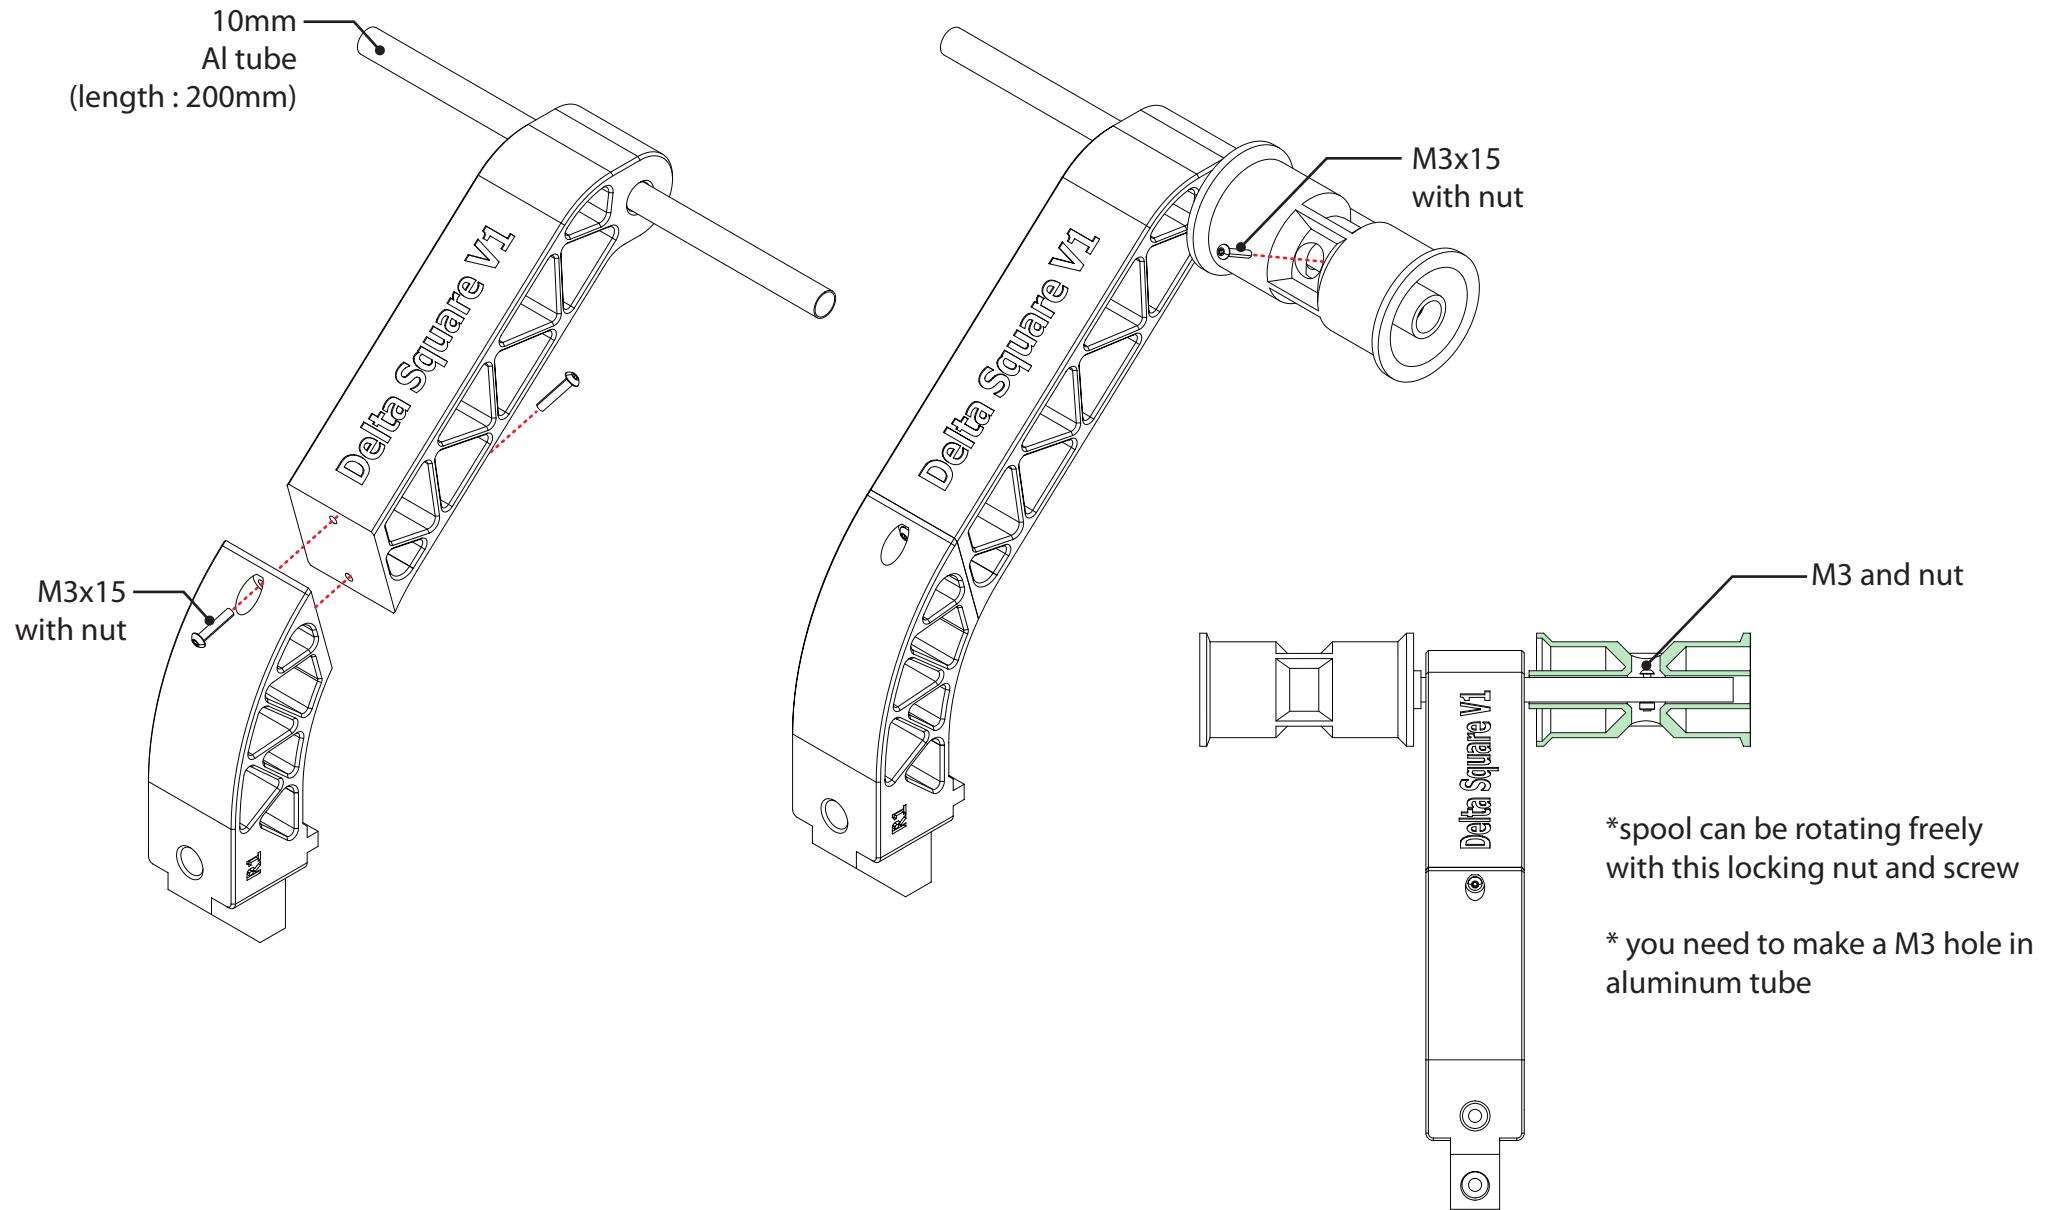


Spool Bridge

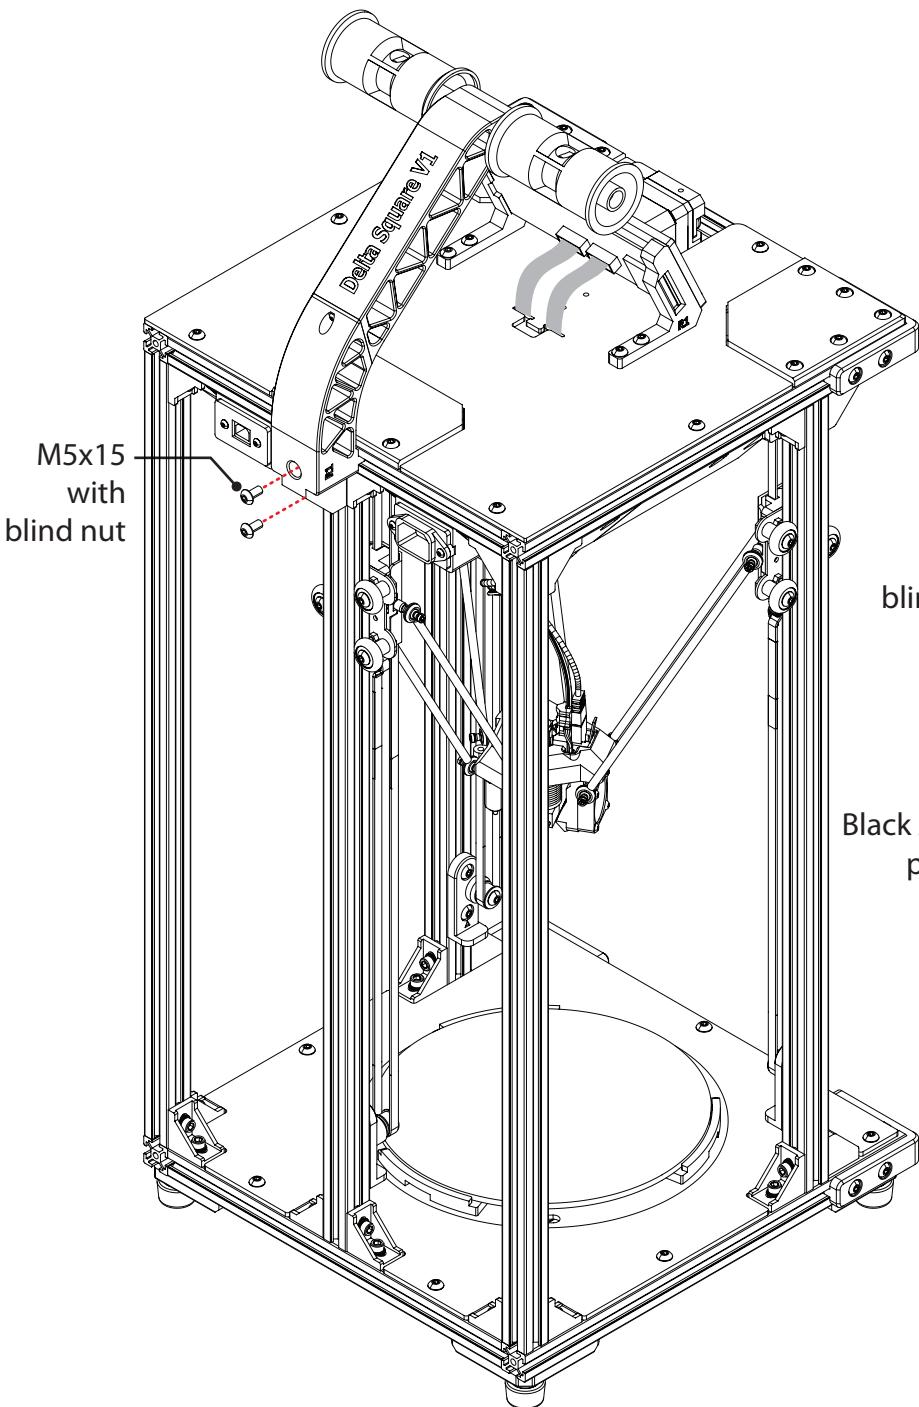




Back chamber plate

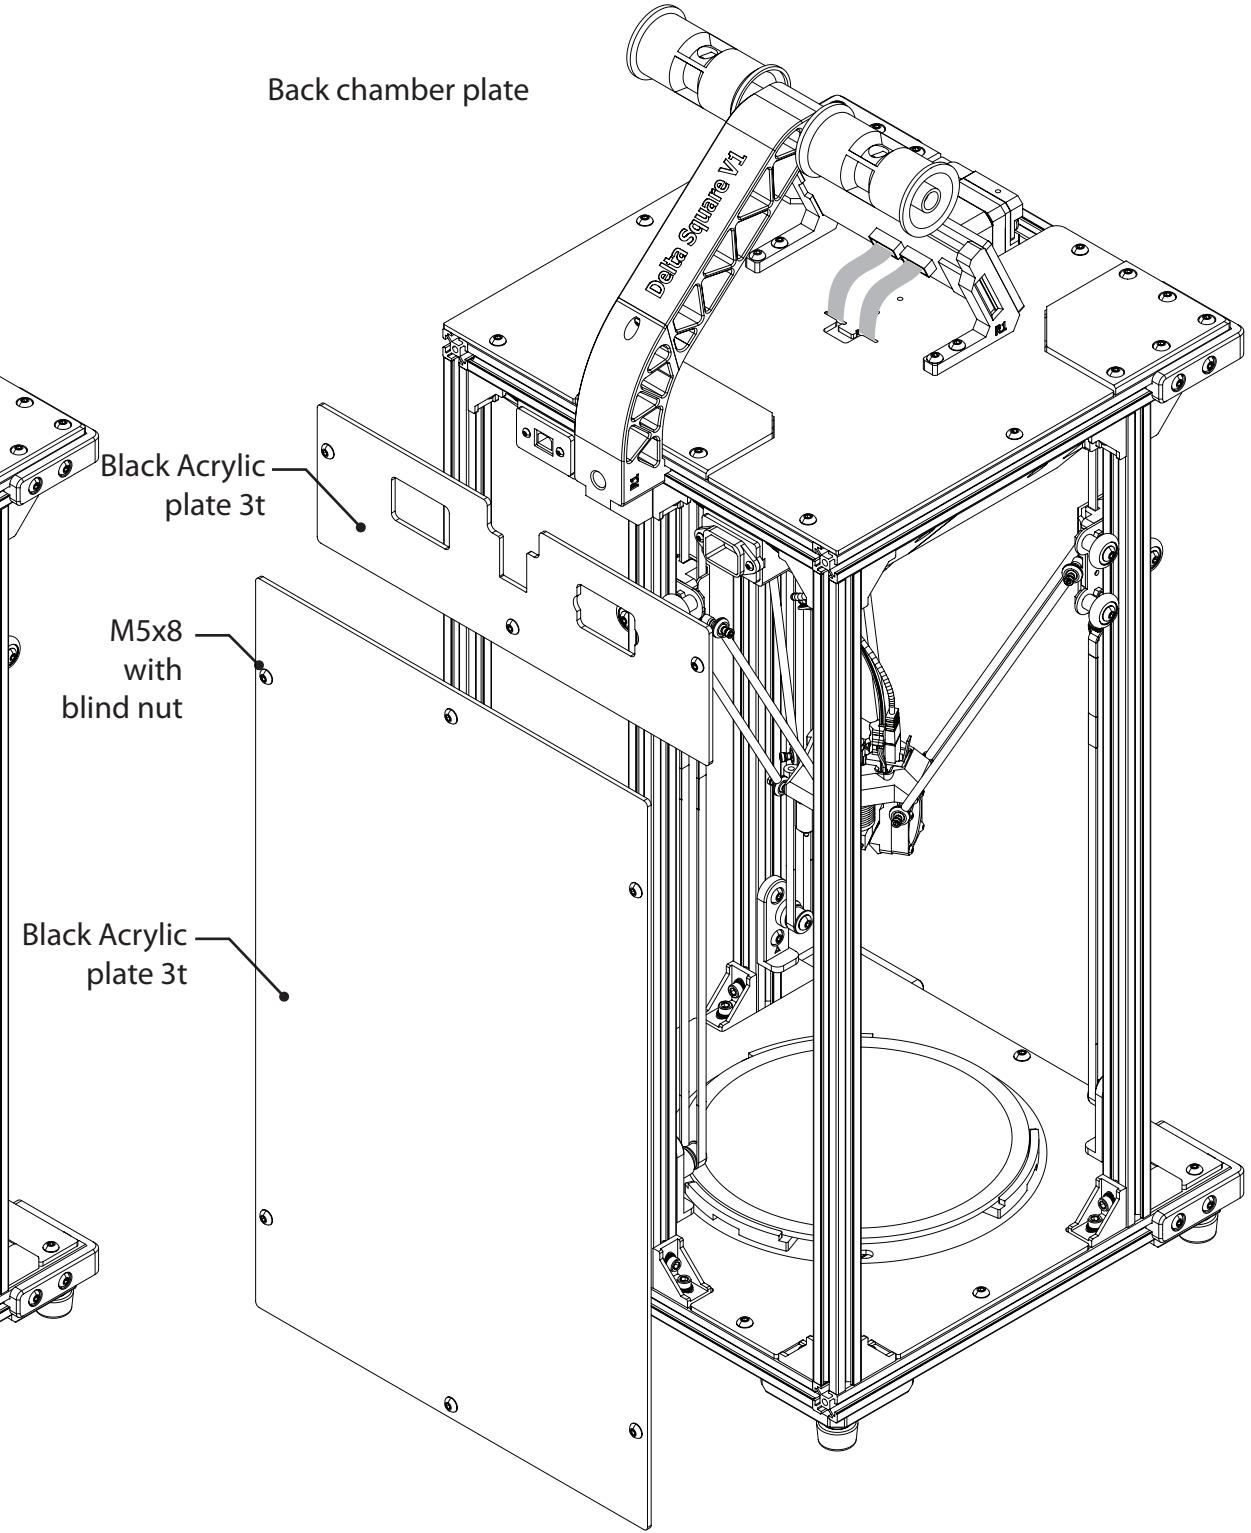

Door hinge and chamber side plate

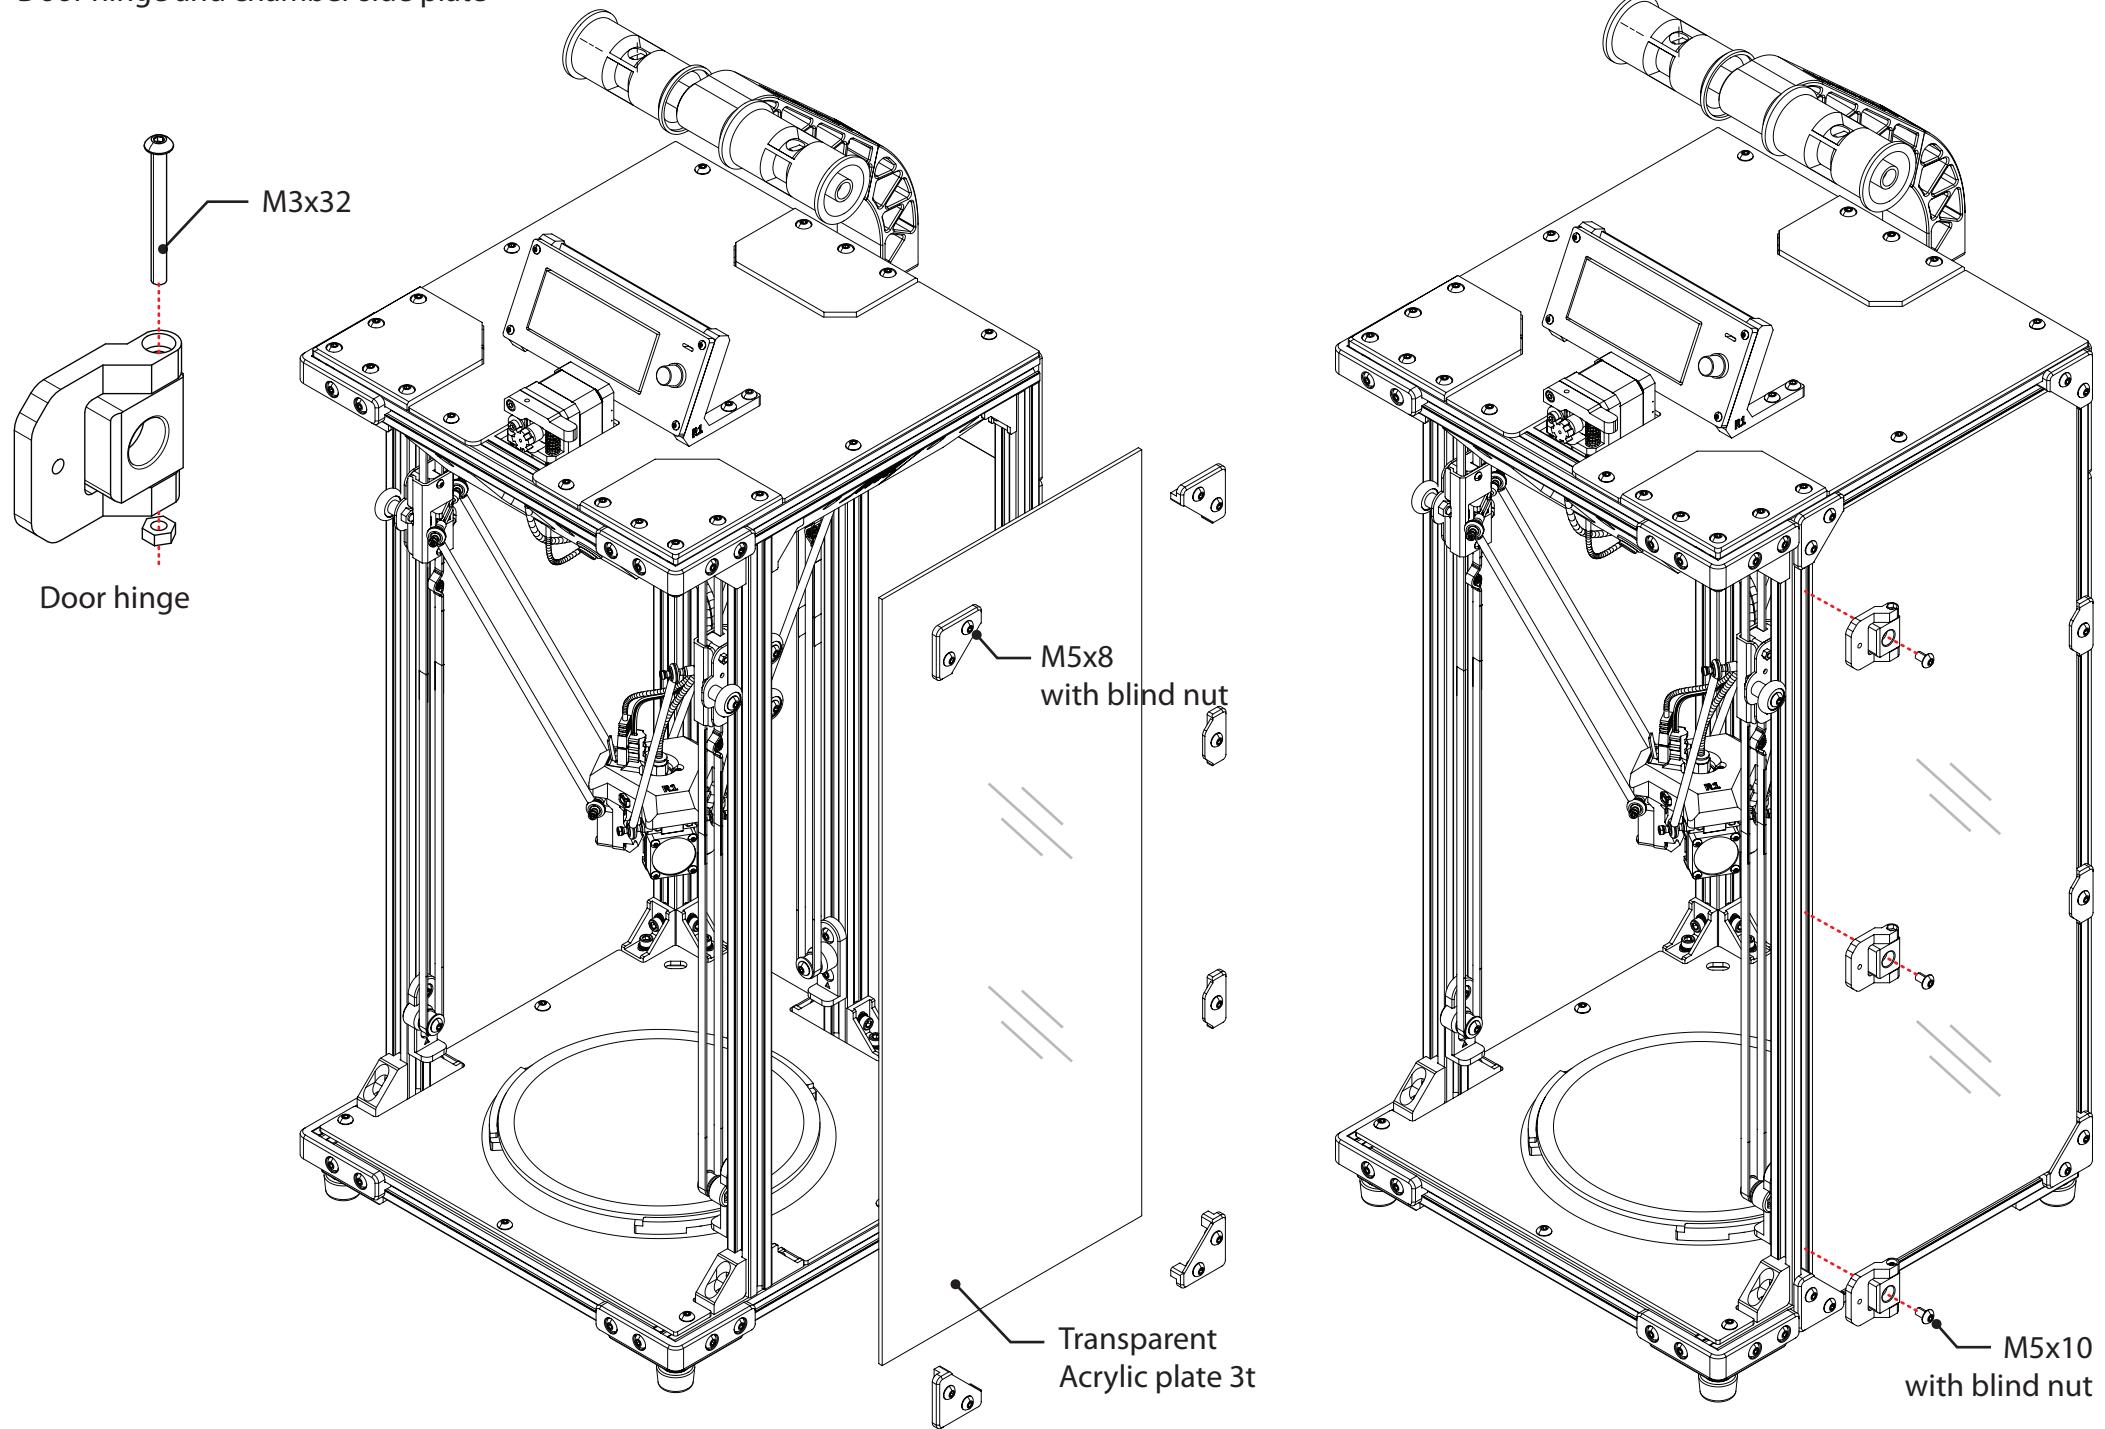

chamber door assembly

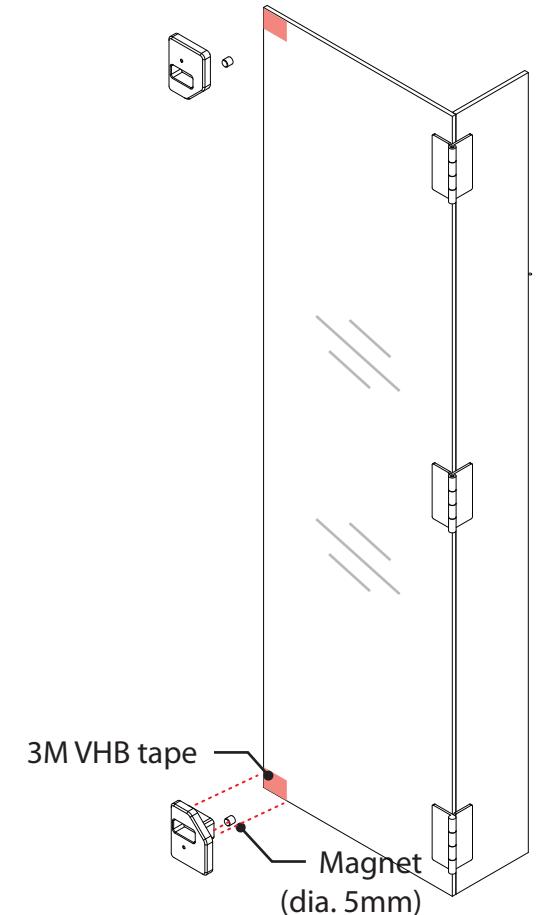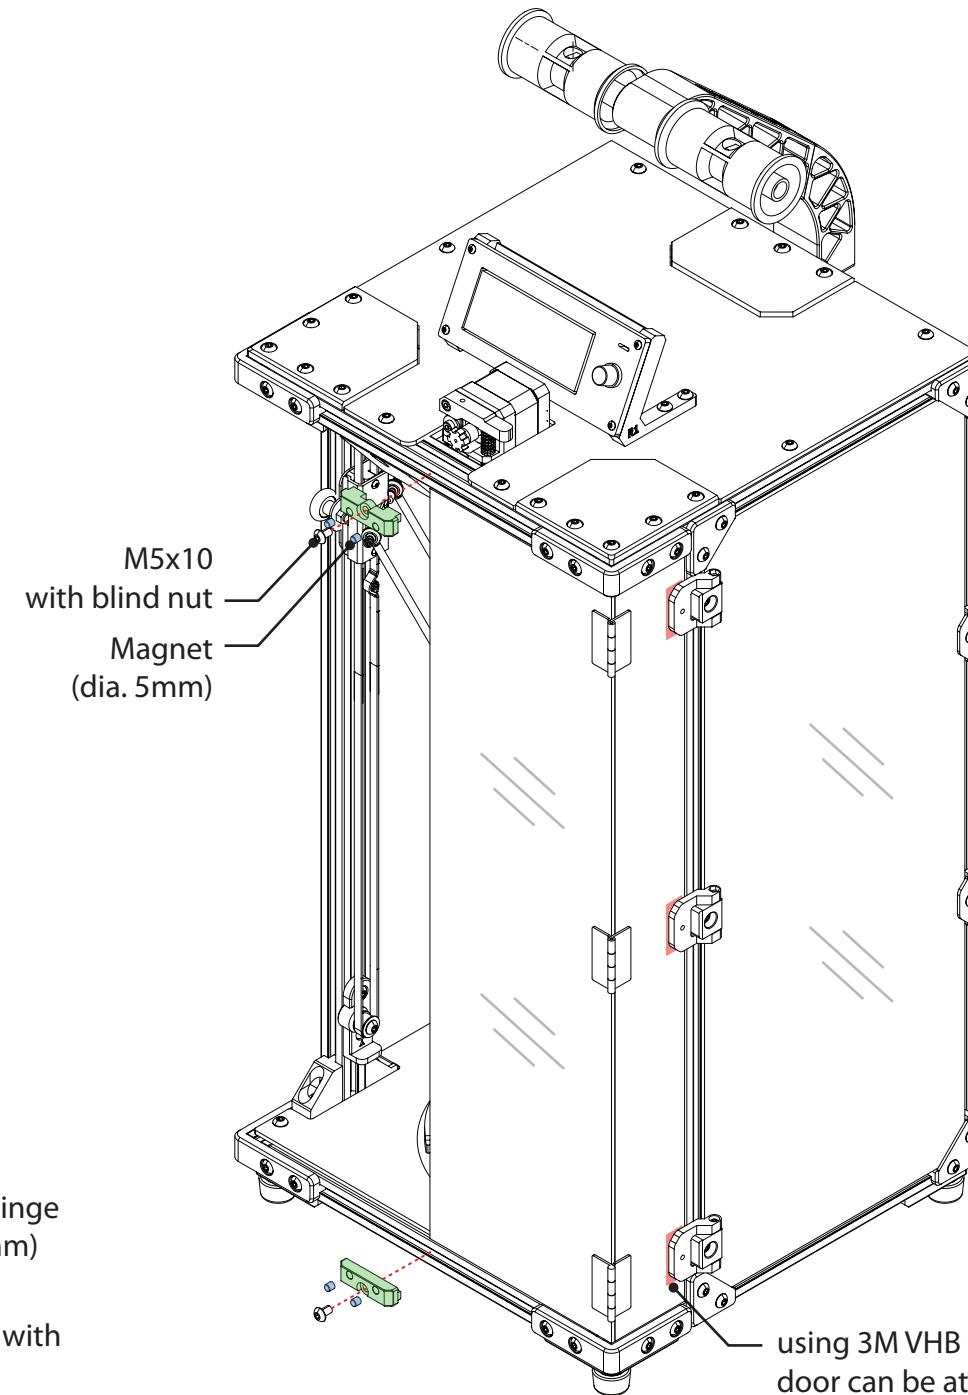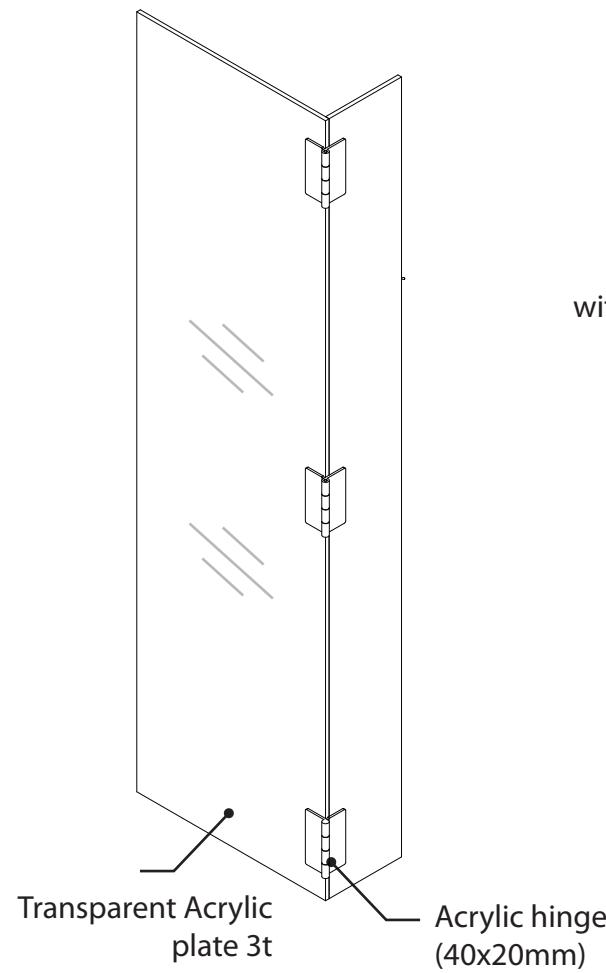

*Acrylic hinge can be attached with
3M VHB tape

using 3M VHB tape,
door can be attached with hinge

